
TOLERANCE UNLESS OTHERWISE SPECIFIED .X ±0.25 .XX ±0.13 .XXX ±0.10


THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.




ISSUE NUMBER ORIGINAL



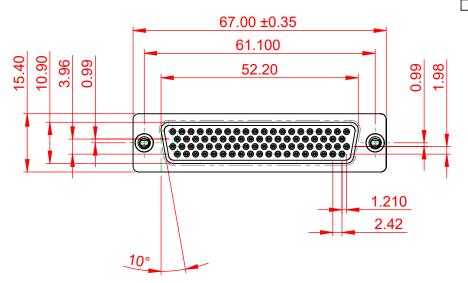





NOTES:

MATERIAL:

HOUSING: THERMOPLASTIC POLYESTER, UL94V-0

STEEL, TIN PLATED SHELL:

COPPER ALLOY, 30µ GOLD PLATED CONTACT:

OPERATING TEMPERATURE: -55°C TO 125°C

CURRENT RATING: 3A PER CONTACT **CONTACT RESISTANCE:** $25m\Omega$ MAX.

INSULATOR RESISTANCE:

5000MΩ min.

PART NUMBER:

DIELECTRIC

WITHSTANDING VOLTAGE: 1000V AC rms

638 SERIES D-SUB CONNECTOR



EDAC INC TORONTO, ONTARIO CANADA

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC..AND SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

SW REFERENCE NO.: 628 ASSEMBLY		
DRAWN: C.B	DATE: AUG. 01/2018	
CHECKED:	DATE:	
SCALE: 1:1	SHEET 1 OF	1
DRAWING NUMBER: 638-078-631-276		ISSUE

638-078-631-276

THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.