

#### **Mounting Option**

01-No Mounting Lugs

#### **Contact Detail**

540-Wire Wrap .025 Sq.(0.64 Sq.) - Tail LG=.560(14.22) .156 [3.96] Contact Spacing x .200 [5.08] Row Spacing





## **See Accompanying Page for:**


- Bend Detail
- Mounting Options
- Features and Specifications

THIS IS A C.A.D. GENERATED DRAWING



ISSUE NUMBER

ORIGINAL

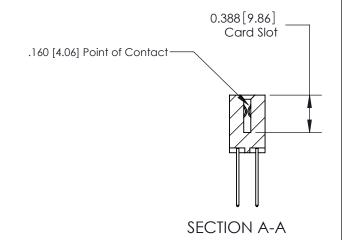

ACAD REFERENCE NO. 333 ENG MASTER

J.LEE

333 Assembly

NTS

DATE: OCT. 14/09

SHEET 1 OF 4

EDAC INC THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC., AND	Down N. 1996 or 222 010 540 001					
TORONTO, ONTARIO CANADA  ARE THE PROPERTY OF EDAC INC., AND SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS	Part Number: 333-018-540-201					
CANADA  OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS		EDAC INC		SCALE:		
	OUR CONNECTION TO	CANADA	SHALL NOT BE REPRODUCED OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS	DRAWING		

333 Series Card Edge Connector

THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.

1



Contact Bend Detail		ACAD REFERENCE NO. 333 ENG MASTER			
		DRAWN: J.LEE	DATE: OC	T. 14/09	
		CHECKED:	DATE:		
EDAC INC			SHEET :	2 OF 4	
TORONTO, ONTARIO SHALL NOT BE REPRODUCED, OR COPIL OR USED AS THE BASIS FOR THE		DRAWING NUMBER	•	ISSUE	
YOUR CONNECTION TO QUALITY & SERVICE	MANUFACTURE OR SALE OF APPARATUS	333 Assembly		1	

THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER



SOL NUMBER

DRIGINAL

1



	333 Series Card Edge Connector		ACAD REFERENCE NO. 333 ENG MASTER				
		DRAWN:	J.LEE	DATE: O	CT. 14/09		
	Mounting Options		CHECKED:		DATE:		
		THESE DRAWINGS AND SPECIFICATIONS	SCALE:	NTS	SHEET :	3 OF 4	
		TORONTO, ONTARIO ARE THE PROPERTY OF EDAC INC., A SHALL NOT BE REPRODUCED, OR COLOR USED AS THE RASIS FOR THE		DRAWING	NUMBER		ISSUE
	MANUFACTUR		MANUFACTURE OR SALE OF APPARATUS	3	33 Assembly		1

ISSUE NUMBER

ORIGINAL



### **Features**

- .156 (3.96) Contact Spacing x .200 (5.08) Row Spacing
- Accepts .062 (1.57) Nominal Thickness P.C. Board
- High Profile Insulator Body .600 (15.24)
- Contact Termination Options include P.C. Tail, Wire Hole, Wire Wrap, 90 Degree, & Extender Board Bends
- Single or Dual Row Configurations
- Variety of Mounting Options, Flush or Offset Lugs
- Accepts Between Contact and In-Contact Polarizing Keys

# **Specifications**

- Insulator Material: Thermoplastic Polyester, UL 94V-0, Colour: Green
- Contact Material: Copper, Nickel, Tin Alloy CA-725
- Contact Plating: Gold on the Mating Area, Tin on the Contact Tails, Nickel Underplate
- Current Rating: 3 Amperes Continuous
- Contact Resistance: 10 Milliohms Maximum
- Dielectric Withstanding Voltage: 1800 V AC rms at Sea Level Between Adjacent Contacts
- Insulation Resistance: 5000 Megohms Minimum
- Operating Temperature: -65 to +105 Degrees C
- Insertion Force: 16 oz (4.45 N) Maximum per Contact Pair when Tested with a .070 (1.78) Thick Gauge
- Withdrawal Force: 1 oz (0.28 N) Minimum per Contact Pair when Tested with a .054 (1.37) Thick Gauge

333 Series Card Edge Connector	ACAD REFERENCE NO. 333 ENG MASTER
Features and Specifications	DRAWN: J.LEE DATE: OCT. 14/09
redictes and specifications	CHECKED: DATE:
	RAWINGS AND SPECIFICATIONS SCALE: NTS SHEET 4 OF 4
TORONTO, ONTARIO SHALL N	OT BE REPRODUCED,OR COPIED DRAWING NUMBER ISSUE
	TURE OR SALE OF APPARATUS 333 Accombly