

### **Mounting Option**

12-.128 (3.25) Dia. Side Mounting Holes

#### **Contact Detail**

500-Wire Hole .050x.025(1.27x0.64) - Tail LG=.260(6.60) .156 [3.96] Contact Spacing x .200 [5.08] Row Spacing



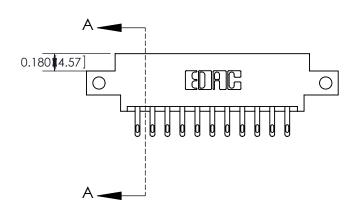

# **See Accompanying Pages for:**

- **Contact Bend Details**
- **Mounting Options**
- **Features and Specifications**



0.330 [8.38] _ Card Slot	
.160 [4.06] Point of Contact	
	, T
<u> </u>	
SECTION A-A	4

837 Series High Temp Card Edge Connector
Part Number: 887-022-500-812



	Nove her exercise his: Of erro Willer			
	DRAWN: J.LEE	DATE: OCT. 06/09		
	CHECKED:	DATE:		
	SCALE: NTS	SHEET 1	OF 4	
)	DRAWING NUMBER		ISSUE	

ACAD REFERENCE NO 837 ENG MASTER

837 Assembly

THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER

ISSUE NUMBE

ORIGINAL

1



83/ Series High Temp Card Eage Connector  Contact Bend Detail		ACAD REFERENCE NO. 837 ENG MASTER			
		DRAWN: J.LEE	DATE: OCT. 06/09		
		CHECKED:	DATE:		
EDAC INC	EDAC INC TORONTO, ONTARIO CANADA  CONNECTION TO QUALITY & SERVICE  EDAC INC THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC., AND SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	SCALE: NTS	SHEET :	2 OF 4	
		DRAWING NUMBER	•	ISSUE	
		837 Assembly		1	





## **Features**

- CSA Approved and UL Recognized
- .156 (3.96) Contact Spacing x .200 (5.08) Row Spacing
- Accepts .062 (1.57) Nominal Thickness P.C. Board
- High Profile Insulator Body .600 (15.24)
- Contact Termination Options include P.C. Tail, Wire Hole, Wire Wrap, 90 Degree & Extender Board Bends
- Single or Dual Row Configurations
- Large Variety of Mounting Options, Flush or Offset Lugs
- Pre-assembled Card Guides Available
- Accepts Between Contact and In-Contact Polarizing Keys

## **Specifications**

- Insulator Material: DAP
- Contact Material: Copper, Nickel, Tin Alloy CA-725
- Contact Plating: Gold on the Mating Area, Tin on the Contact Tails, Nickel Underplate
- Current Rating: 3 Amperes Continuous
- Contact Resistance: 10 Milliohms Maximum
- Dielectric Withstanding Voltage: 1800 V AC rms at Sea Level Between Adjacent Contacts
- Insulation Resistance: 5000 Megohms Minimum
- Operating Temperature: -65 to +165 Degrees C
- Insertion Force: 16 oz (4.45 N) Maximum per Contact Pair when Tested with a .070 (1.78) Thick Gauge
- Withdrawal Force: 1 oz (0.28 N) Minimum per Contact Pair when Tested with a .054 (1.37) Thick Gauge

	837 Series High Temp Card Edge Connector Features and Specifications		ACAD REFERENCE NO. 837 ENG MASTER			
			DRAWN:	J.LEE	DATE: OC	CT. 06/09
	realities and specifications	1	CHECKED	):	DATE:	
	COOO EDAC INC	EDAC INC TORONTO, ONTARIO CANADA CONNECTION TO QUALITY & SERVICE  EDAC INC. THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	SCALE:	NTS	SHEET .	4 OF 4
			DRAWING	NUMBER		ISSUE
	CANADA I		8	37 Assembly		1