


CONFIGURATION:
DB25M

CN36M

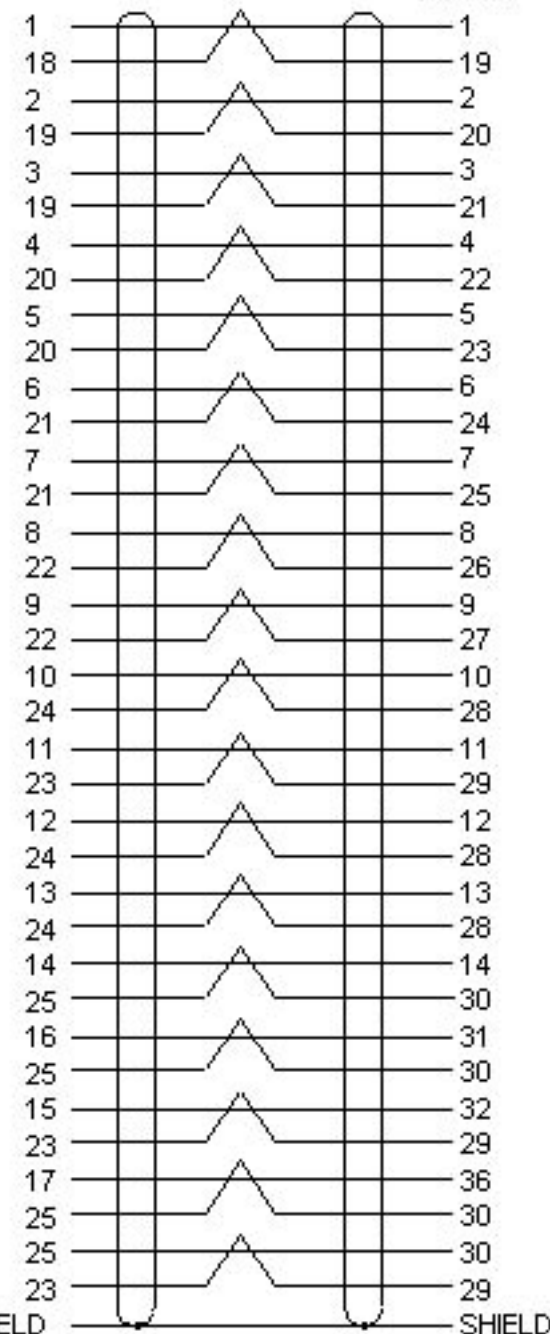

MAT'L:

1. CABLE: UL20276 #28 18PAIRS+1+ALMY+BRAID (BEIGE PVC JACKET) O.D:7.5MM INSULATION CONDUCT WITH P.P TYPE
2. BOTH CONNECTORS WITH NORMAL TYPE
3. THUMBSCREW: #4-40UNC TYPE
4. BOTH CONNECTORS INNER MOLDED WITH COPPER TAPE AND SOLDER(360°), ALLOVER MOLDED WITH BEIGE PVC
COPPER TAPE SIZE:
DB25 MALE: (30mm x 95mm)
CN36 MALE: (30mm x 110mm)

(IEEE1284)

NOTE:

1. TOTAL LENGTH: 3000±50mm
2. COLOR: BEIGE
3. MOLDED TYPE

DATE	25 JUL,1996	PARTS NO	CC201M2-47
UNIT	MM	DRAWN NO	201M2-47
SCALE		BUYER NO	002

TITLE:	DB25 MALE-CN36 MALE (MOLDED TYPE) AK712 3M
--------	---

DRAWN	L.P. 7/25	CHECK	APPRO
ASSMANN ELECTRONICS, INC			