


Digi Connect® WAN Family

Cellular Gateways/Routers/VPN Devices

Cellular routers, gateways and VPN devices provide high performance wireless TCP/IP data communications via cellular GSM/CDMA networks, for primary and backup connectivity to remote sites and devices.

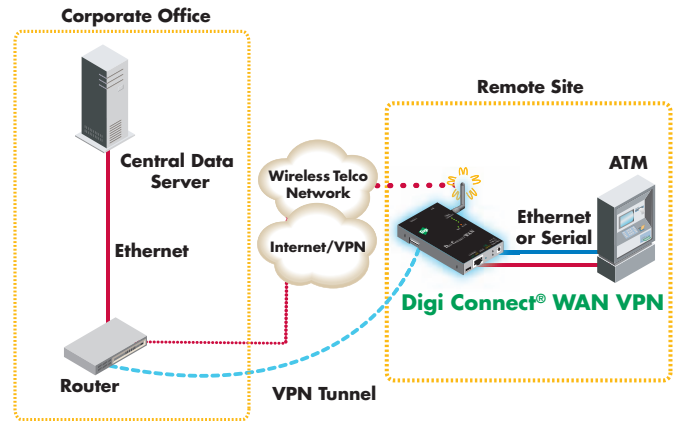

Features/Benefits

- Hardware suite includes cellular gateways, routers and VPN devices
- GSM GPRS/EDGE or CDMA 1xRTT network for high-speed wireless network connectivity
- Unique Digi SureLink™ "always-on" connection maintains wireless connection for rapid on-demand communications
- 10/100Base-T Ethernet and serial connections
- 9-30VDC for diverse power input
- Web interface for easy centralized console configuration and statistics
- Integrates with Digi Connectware Manager for seamless management and monitoring of hundreds or thousands of devices
- Up to 256-bit AES security provides encryption and authentication for management communications via Digi Connectware Manager
- Specialized model for industrial and synchronous applications

Overview

The Digi Connect WAN family of commercial-grade Wireless WAN (WWAN) cellular routers, gateways and VPN appliances provides secure high-speed wireless connectivity to remote sites and devices. Digi Connect WAN cellular products can be used for reliable primary wireless network connectivity to equipment at remote locations, as well as for a backup to existing landline communications. They are also ideal for use where wired networks (e.g., leased line/frame relay, ISDN, DSL) are not feasible, or where alternative network connections are required.

Digi Connect WAN products are able to provide a primary wireless WAN connection to remotes sites containing both Ethernet or serial devices. New construction locations, power utility substations, small retail/POS sites or temporary facilities without primary wired connections are examples of applications for this wireless connectivity solution.

For backup network applications, Digi Connect WAN cellular products integrate with remote locations via a secondary Ethernet WAN port on an existing router. This provides a truly diverse network connection for remote locations requiring maximum uptime, such as retail/POS and financial applications.

Digi SureLink is a unique feature that provides a "persistent connection" over wireless networks by utilizing a three-way client and server initiated scheme. All Digi Connect WAN cellular products seamlessly integrate with Digi Connectware® Manager, which provides easy setup, configuration and maintenance of large installations. Users can upgrade firmware or change settings on thousands of devices with only a few clicks. It also makes troubleshooting simple by reporting problems like identifying misbehaving devices or network issues.

Features Comparison

Digi Connect WAN

Wireless WAN cellular router. Provides high performance wireless TCP/IP data communications via cellular GSM/CDMA networks, for primary and backup connectivity to remote locations and devices.

Digi Connect WAN VPN


Wireless WAN GSM/CDMA cellular router plus integrated VPN. Creates a secure WAN connection via an Ethernet-to-cellular interface.

Digi Connect WAN IA

Industrial-grade Wireless WAN GSM/CDMA router/gateway. Offers all of the functionality of Digi Connect WAN VPN plus an industrial-grade feature set.

Digi Connect WAN Sync

Wireless WAN cellular router with support for legacy synchronous serial devices. Connects to remote synchronous devices, such as ATMs, using standard GSM/CDMA networks.

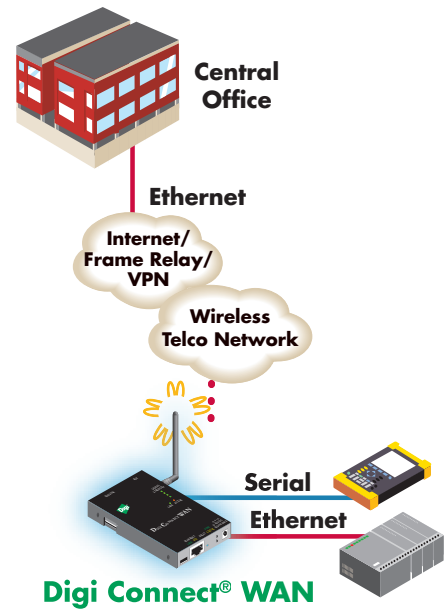

	Digi Connect® WAN	Digi Connect® WAN VPN	Digi Connect® WAN IA	Digi Connect® WAN Sync
Interfaces				
Serial Port Type	RS-232/422/485	RS-232/422/485	RS-232/422/485	Synchronous
10/100 Ethernet	•	•	•	•
GSM GPRS 12/EDGE 10 -or- CDMA 2000 1xRTT	•	•	•	•
Routing				
NAT, Port Forwarding, DHCP Server/Client, VPN Pass-Through, Firewall - IP Filtering	•	•	•	•
Integrated IPsec VPN		•	•	•
Security				
SSL, SSHv2, FIPS 197, HTTPS	•	•	•	•
Management				
Built-in Web Interface	•	•	•	•
Digi Connectware® Manager	•	•	•	•
Special Features				
Digi SureLink™	•	•	•	•
RealPort® Virtual COM Ports	•	•	•	•
Bisync Protocol with 3270/3275 Emulation				•
DIN Rail Mountable	•	•	• Kit Included	•
Terminal Block for Power, Modbus Support, Class 1, Div 2			•	

Features/Specifications

FEATURES

- Easily accessible SIM module
- Network protocols
 - UDP/TCP, DHCP
- Status LEDs
 - Ethernet, power on, cellular link/activity, signal strength
- Patented RealPort for COM ports and RFC 2217

Router/Firewall Features

- NAT
- Port forwarding
- VPN pass-through
- Access control lists (IP filtering)

Security

- SSL, SSHv2, FIPS 197

VPN Features

- *Digi Connect WAN VPN, Digi Connect WAN IA, Digi Connect WAN Sync*
- IPsec with IKE/ISAKMP
- Multiple tunnel support
- DES, 3DES and AES up to 256-bit encryption

IA Features

- *Digi Connect WAN IA*
- DIN rail mounting kit included
- Class 1, Div 2 rating
- Terminal block for power
- Modbus to ModbusTCP protocol conversion

Sync Features

- *Digi Connect WAN Sync*
- Bisynch protocol with 3270/3275 emulation

RF Features

- *GSM Models*
- Network: Quadband 1900/850 and 1800/900 MHz GSM GPRS/EDGE
- Transmit frequency: 1850-1910 MHz and 824-849 MHz
- Receiver frequency: 1930-1990 MHz and 869-894 MHz
- EDGE multi-slot class 10
- GPRS multi-slot class 12
- Throughput up to 240 Kbps, 100-130 Kbps typical
- RF antenna connector: 50 Ohm SMA
- Attached swivel dipole antenna

RF Features

- *CDMA Models*
- Network: 800 MHz CDMA cellular: 1900 MHz CDMA PCS 1xRTT
- Transmit frequency: 1851-1909 MHz and 824-849 MHz
- Receiver frequency: 1931-1989 MHz and 869-894 MHz
- Throughput up to 153 Kbps, 60-80 Kbps typical
- RF antenna connector: 50 Ohm SMA
- Attached swivel dipole antenna

FEATURES (CONT.)

Management

- HTTP and CLI for web management
- Optional secure enterprise management via Digi Connectware Manager

ETHERNET INTERFACE

- Connector: RJ-45
- Standard: IEEE 802.3
- Physical Layer: 10/100Base-T
- Data rate: 10/100 Mbps (auto-sensing)
- Mode: full or half duplex (auto-sensing)

SERIAL INTERFACE

- RS/232/422/485
- Sync/Bisynch port (Digi Connect WAN Sync only)
- Throughput up to 230 Kbps
- Full signal support for TXD, RXD, RTS, CTS, DTR, DSR and DCD
- Hardware and software flow control
- Can provide diverse out-of-band console management for network devices like routers and switches

ENVIRONMENTAL

- Operating temperature: -30° C to 70° C (-22° F to 158° F) for GSM models
- Operating temperature: -30° C to 60° C (-22° F to 140° F) for CDMA models
- Relative humidity: 5% to 95% (non-condensing)
- Ethernet isolation: 1500VAC min per IEEE802.3/ANSI X3.263
- Serial port protection (ESD): +15 kV Air 6 AP and +8 kV contact discharge per IEC 1000-4-2

POWER REQUIREMENTS

- Power input: 9-30VDC
- 12VDC power supply for 0° C to 60° C (32° F to 140° F) included; extended temperature available
- DC power consumption
 - Idle: 1.2 W
 - Max: 3.4 W
- AC power consumption
 - Idle: 2.0 W
 - Max: 5.8 W
- Surge protection (with included power supply)
 - 4 kV burst (EFT) per-4-4
 - 2 kV surge per EN61000-4-5 (non-condensing)

WIRELESS CARRIER CERTIFICATIONS

GSM GPRS/EDGE

- Cingular
- Rogers Wireless

CDMA 1xRTT

- Sprint
- Centennial Wireless
- Alltel Wireless
- Verizon
- Midwest Wireless

REGULATORY APPROVALS

Mobile Certifications

- GSM Models

- PTCRB, NAPRD.03
- GCF-CC
- R&TTE, EN 301 511

Mobile Certifications

- CDMA Models

- CDG TIA/EIA-690
- CDG TIA/EIA-98-E

Safety


- UL 60950
- CSA 22.2 No. 60950
- EN60950


Emissions/Immunity

- CE
- FCC Part 15, Class A (FCC identifier GGL-R1902G)
- AS/NZS CISPR 22
- EN55024
- EN55022, Class A

DIMENSIONS


- Width: 3.35 in (8.51 cm)
- Height: 0.97 in (2.47 cm)
- Length: 5.25 in (13.34 cm)
- Weight: 1.00 lb (0.45 g)



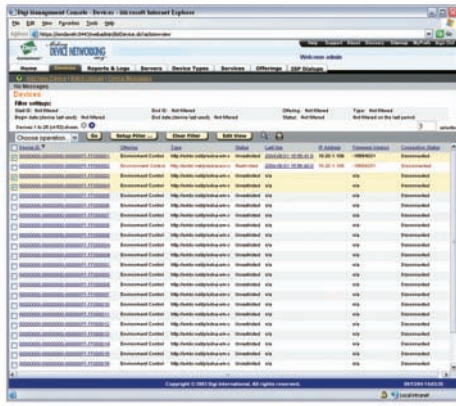

Manage many devices at the same time with just a few clicks

Digi Connectware Manager is an enterprise remote device management software that runs on a customer's central server and can be managed via web interface from anywhere. Administrators have access to one or thousands of devices for management, monitoring, alerts and troubleshooting. Includes built-in Dynamic DNS server for mapping an Internet host name to a dynamic/public IP address.

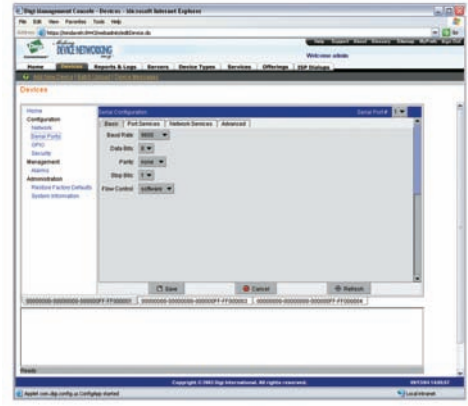


Easy, web based configuration

Built-in web user interface provides simple access for local configuration or one-to-one remote access.


MODEL.....PART NUMBERS

	<u>North America</u>	<u>International</u>	
GSM Models			
Digi Connect WAN GSM	DC-WAN-GE10A	DC-WAN-GE10A-W	
Digi Connect WAN VPN GSM	DC-VPN-GE10A	DC-VPN-GE10A-W	
Digi Connect WAN IA GSM	DC-WAN-F501	DC-WAN-F501	
Digi Connect WAN Sync GSM	DC-WAN-K401	N/A	
CDMA Models - North America Only	<u>Sprint</u>	<u>Verizon</u>	<u>Alltel</u>
Digi Connect WAN CDMA	DC-WAN-S1XA	DC-WAN-D111	DC-WAN-D116
Digi Connect WAN VPN CDMA	DC-VPN-S1XA	DC-WAN-D311	DC-WAN-D316
Digi Connect WAN IA CDMA	DC-WAN-G510	DC-WAN-G511	TBD
Digi Connect WAN Sync CDMA	DC-WAN-M410	TBD	TBD
Antennas	<u>North America</u>	<u>International</u>	
Dual Band Wireless 2" Monopole Antenna	DC-ANT-DBMP	DC-ANT-DBMP-W	
Dual Band Wireless Desktop 2.8" Antenna with 8 ft. Cable	DC-ANT-DBDT	DC-ANT-DBDT	
Dual Band Wireless High Gain 14" Antenna with Magnetic Mount	DC-ANT-DBHG	DC-ANT-DBHG	
Accessories		<u>Worldwide</u>	
Extended Temperature Power Supply		76000717	
12VDC Locking Barrel Extended Temperature Hardened Power Supply		76000652	
DB-9F to DB-9F Crossover Cable (4 ft.)		76000642	
DIN Rail Mounting Bracket		76000682	
48VDC to 12VDC Power Converter		76000696	


Digi Connect WAN, Digi Connect WAN VPN, Digi Connect WAN, Sync- Front

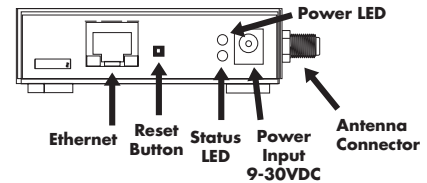

Digi Connect WAN IA - Front

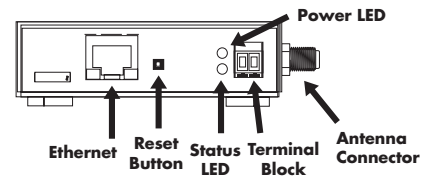

All Models - Back



*Digi Connect WAN IA and Digi Connect WAN Sync do not include an auxiliary port

DIGI SERVICE AND SUPPORT - You can purchase with confidence knowing that Digi is here to support you with expert technical support and a strong five-year warranty. www.digi.com/support

Digi International

11001 Bren Road E.
Minnetonka, MN 55343
U.S.A.
PH: 877-912-3444
952-912-3444
FX: 952-912-4952
email: info@digi.com

Digi International France

31 rue des Poissonniers
92200 Neuilly sur Seine
PH: +33-1-55-61-98-98
FX: +33-1-55-61-98-99
www.digi.fr

Digi International KK

NES Building South 8F
22-14 Sakuragaoka-cho,
Shibuya-ku
Tokyo 150-0031, Japan
PH: +81-3-5428-0261
FX: +81-3-5428-0262
www.digi-intl.co.jp

Digi International (HK) Limited

Suite 1703-05, 17/F,
K Wah Centre
191 Java Road
North Point, Hong Kong
PH: +852-2833-1008
FX: +852-2572-9989
www.digi.cn

Digi International, the leader in device networking for business, develops reliable products and technologies to connect and securely manage local or remote electronic devices over the network or via the web. With over 20 million ports shipped worldwide since 1985, Digi offers the highest levels of performance, flexibility and quality.

www.digi.com

WHEN RELIABILITY MATTERS™

© 2005-2007 Digi International Inc.

Digi, Digi International, the Digi logo, the When Reliability Matters logo, Digi Connect, Digi Connectware, RealPort and Digi SureLink are trademarks or registered trademarks of Digi International Inc. in the United States and other countries worldwide. All other trademarks are the property of their respective owners.

91001371
A5/207

