

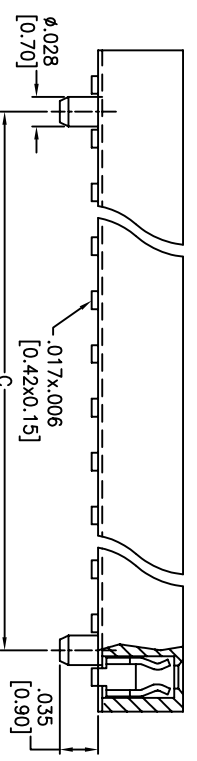
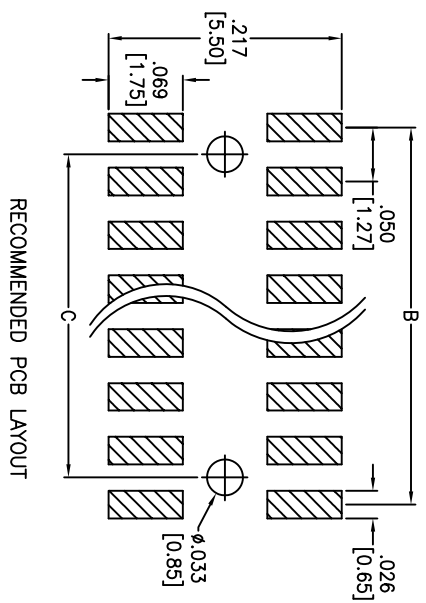


Rev	AWO #	Description	Date	Appr
-		RELEASED	10/02/12	

APPROVED: _____
 DATE: _____ TITLE: _____

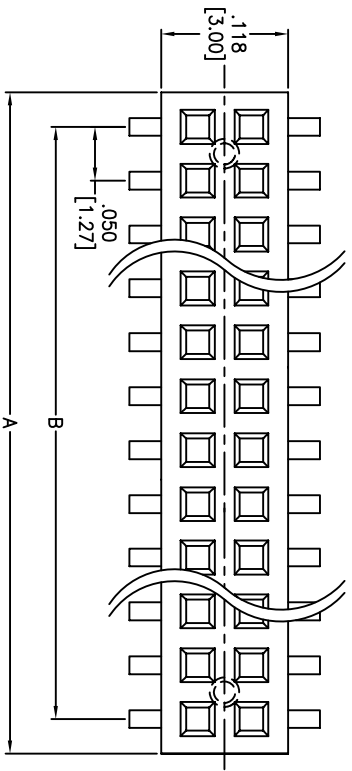

SPECIFICATIONS:
 Material: Insulator: Hi-Temp thermoplastic, rated UL 94V-0
 Insulator color: Black
 Contacts: Phosphor Bronze
 Plating: Gold Flash over Nickel underplate on contact area, Tin over Copper underplate on SMT tails

Positions: 06 thru 80
 A = .050 [1.27] x No. of Positions + .009 [0.24]
 B = .050 [1.27] x No. of Spoces
 C = .050 [1.27] x No. of Positions - .100 [2.54]

Electrical:
 Current rating: 1 Amp max
 Contact resistance: 20 mohms max
 Insulation resistance: 1,000 Mohms min
 Dielectric withstanding voltage: 300 VAC for 1 minute
 Temperature Rating: Operating temperature: -40°C to +105°C
 Environmental: Lead free, RoHS compliant.



ADAM TECH

909 Ratway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .050" RECEPTACLE STRIP, DUAL ROW, SMT
 .085" INSULATOR HEIGHT, SEL-GOLD PLATED

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]		TOLERANCES: EXCEPT AS NOTED		INCHES		HOLES	
X	.10	Ø.X	±.10	.XX	±.020	Ø:XXX	±.015
.XXX	±.015	Ø:XXX	±.010				
APPROVALS		DATE					
DRAWN	TW	10/02/12					
CHECKED	AY	10/02/12					
APPROVED							
REF:	S00032T	SCALE:	NTS				
SIZE	PART NO.	HRS-2C-XX-SG-SMT-P		REV.			
X				-			