



TAPE FOR AUTOMATED PICKUP



NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
3. TERMINAL NUMBERS FOR REF. ONLY.
4. OPERATING FORCE: 500gf MAX.
5. TRAVEL: 0.6 ± 0.25mm
6. CONTACT RATING: 25mA, 24VDC
7. CONTACT RESISTANCE: 100mΩ MAX.
8. INSULATION RESISTANCE: 100MΩ MIN @ 500VDC
9. DIELECTRIC STRENGTH: 300VAC 1 MIN.
10. LIFE: 1,000 CYCLES.
11. OPERATING TEMPERATURE: -40°C to 85°C
- ▲ 12. PACKAGING: 4,000 PCS PER REEL
13. ▲ DENOTES CRITICAL PARAMETER.
14. 2011/65/EU (ROHS) COMPLIANT
- ▲ 15. SWITCHES TO BE SHIPPED WITH THE ACTUATORS IN THE "ON" POSITION

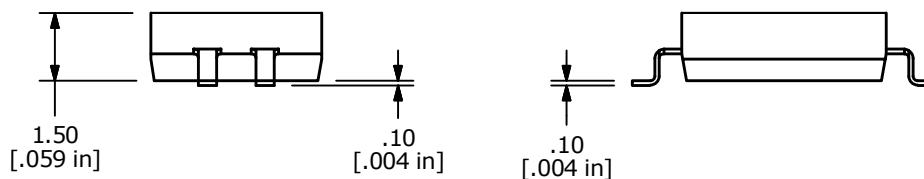

| | | | | |
|-----|--------|---------------------|----------|-----|
| C | 23704 | updated drawing | 12/12/18 | MW |
| B | 17519 | ADD NOTE 15, REDRAW | 7/31/07 | BLR |
| REV | PCR NO | DESCRIPTION | DATE | BY |

| | | | | |
|-------------------------------|-----------|-----|---------|-----|
| E-SWITCH® | | | | |
| TITLE KAN1102RR (ON POSITION) | | | | |
| SCALE | DATE | DR | DWG | REV |
| 6:1 | 7/31/2007 | BLR | N111250 | C |

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED