

PATCHBOX® Plus+ System Fiber Optic

The PATCHBOX® is the most modern cabling system for network cabinets. It makes conventional cable guides and patch cables simply look old. Thousands of satisfied customers worldwide rely on this patented innovation to make their IT more efficient, faster and more economical.

Technical Specification

OS2 Cable

OS2 RBS 9µ/125µ, G.657.B3, LSZH, Yellow, Single-Mode, RoHS compliant

OM4 Cable

OM4 RBS 50µ/125µ, LSZH, Erika Violet, Multi-Mode, RoHS compliant

Connector

LC Duplex - LC Duplex / LC Duplex - SC Duplex

Cable length

1.8m covers 30RU

Frame

RAL9005 powder coated steel

Cassette Profiles

Stainless steel, laser-welded

Mounting Rails

Stainless steel, variable from 500mm to 850mm

Plastic Parts

Polyoxymethylene POM

Operating Temperature Range

-25°C – 70°C

Ambient Humidity Non-Condensing

10% -90%

Gross Weight



11.86kg

Packaging Dimensions

760mm x 590mm x 50mm WxDxH

HS-Code

8544 7000

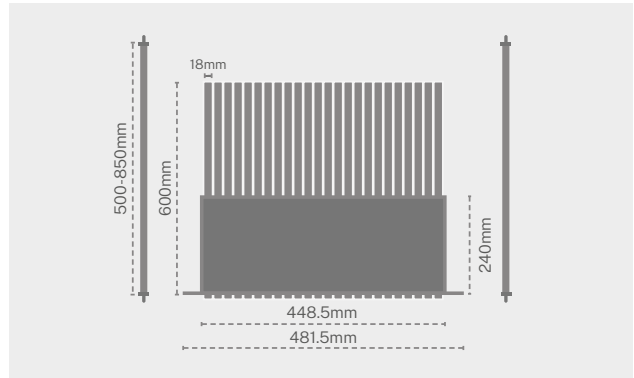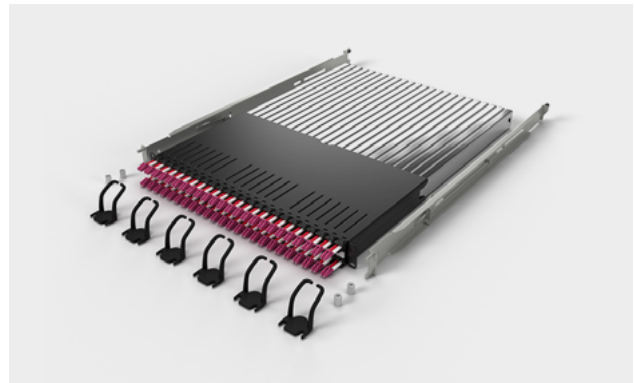

Items included

- 24 x PATCHBOX Plus+ Fiber OS2 / OM4 Cassette with LC-LC / LC-SC connector
- 1 x PATCHBOX Plus+ Frame
- 6 x Patchcatch
- 2 x adjustable mounting rails incl. hex nuts
- 2 x DIN A5 tear-off ID Labels (96 Labels)

OS2 Variants

Product Code	Connector Type
P60SMAOS21124Y	LC-LC
P60SMAOS21224Y	LC-SC

OM4 Variants

Product Code	Connector Type
P60MMAOM41124E	LC-LC
P60MMAOM41224E	LC-SC

