
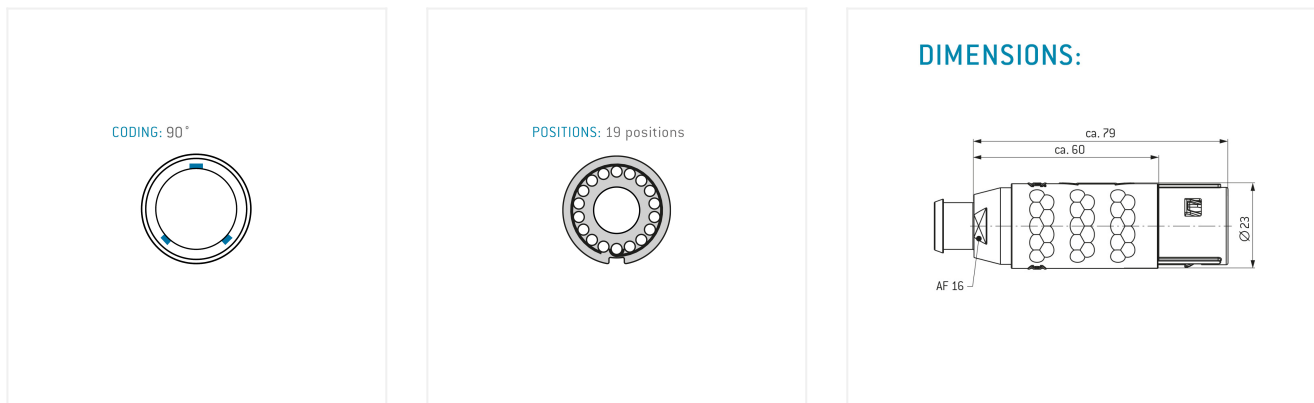


General information

| | |
|-------------------|-----------------------|
| Part number | S4BMFG-P19MY19-0270 |
| Termination | Solder |
| Size | 3.5 |
| Locking principle | Push-Pull |
| Keying | F (90°) |
| Cable Diameter | 9.1 – 10.5 mm |
| Cable outlet | For cable bend relief |



Contact insert description

| | |
|----------------------|--|
| Number of contacts | 19 |
| Contact type | Pins |
| Contact diameter | 1 x Fluid (tube-Ø 5mm/3mm, 4 bar), 18 x 0.7 mm (electrical contacts) |
| Insulator material | PEEK |
| Wire cross section | AWG 22 |
| Termination | Solder |
| Termination diameter | 0.85 mm |

Technical information

| | | |
|--|-----------------------------|--|
| Max. creepage and air clearance distance | 0.5 mm (Contact to contact) | |
| Nominal current single contact | 7.5 A | IEC 60512-5-2:2002 (DIN EN 60512-5-2:2003) |
| Nominal current insert | 3.75 A | VDE 0298-4:2003 A |
| Test voltage | 0.75 kV AC | EIA-364-20F:2019-02 |

All shown connectors are rated to a safety extra low voltage (SELV) of less than 50 V AC / 75 V DC, according to IEC 61140:2016 (VDE 0140-1:2016) Protection against electric shock - Common aspects for installation and equipment. In case other standards rule a specific use of the connector, the application specific safety criteria shall be considered first. In this context, lower voltage ratings may be valid. Warning: Danger to life for operating voltages above 50 V AC / 120 V DC!

Mechanical and environmental data

| | |
|-----------------------|-----------------|
| Degree of protection* | IP68 |
| Operating temperature | -50 °C – 120 °C |
| Mating cycles | 2000 |

*mated condition

Insulator materials MEDI-SNAP®

| | Standard | PEEK |
|--|---|--------------------------|
| Flammability rating | UL 94 | V-0/1.5 |
| Operation temperature | | -50 to +250 °C |
| Dielectric strength | IEC 60243-1:2013 (VDE 0303-21:2014) | 19 kV/mm |
| Comparative figure of the creep resistance CTI | IEC 60112: 2009 (VDE 0303-11:2010) | 175 |
| Water absorption | ASTM D 570:1998 / ISO 62:2008 | 0.1 % |
| Sterilization (autoclaving)* | DIN EN 13060:2019-02 | > 200 cycles |
| Insulation resistance | IEC 60512-3-1:2002 (DIN EN 60512-3-1:2003-01) | > 1 x 10 ¹² Ω |

*this applies to the entire connector

Material and surface treatments

| | |
|------------------|---------------------------|
| Housing | PEI gray |
| Contact material | Cu-alloy with gold finish |

The contact arrangement of an ODU data transmission connector differs from a standard data transmission connector due to the robust ODU specific design. However, the ODU design meets the electrical specifications of the respective standard data transmission protocol.

All shown connectors are defined without breaking capacity (COC) according to IEC 61984:2008 (VDE 0627:2009).

The contact arrangement of an ODU data transmission connector differs from a standard data transmission connector due to the robust ODU specific design. However, the ODU design meets the electrical specifications of the respective standard data transmission protocol.

ODU MEDI-SNAP® and MINI-SNAP® are UL-approved (E110586).

ODU reserves the right to make changes based on the current state of knowledge without prior notice without being obliged to provide replacement deliveries or refinements of older designs.