





ISSUE NUMBER	
ORIGINAL	1

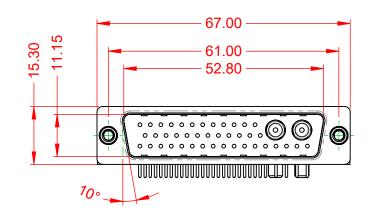




.XX ±0.13 .XXX ±0.05

## NOTES:


MATERIAL: HOUSING: SHELL: CONTACT:

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, TIN PLATED COPPER ALLOY, 30µ" GOLD PLATED



OPERATING TEMPERATURE:	-55°C ~ 125°C
POWER/CO-AX CONTACT RATING: (IF PRESENT)	50Ω (IMPEDANCE)
SIGNAL CONTACT CURRENT RATING: SIGNAL CONTACT RESISTANCE:	5A PER CONTACT10mΩ MAX.
INSULATOR RESISTANCE: DIELECTRIC	5000MΩ min.
WITHSTANDING VOLTAGE:	1000V AC rms





SW REFERENC		SW REFERENCE NO.: 629 C	NO.: 629 COMBO ASSEMBLY		
			DRAWN: C.B	DATE: JAN. 01/20	19
			CHECKED:	DATE:	
	EDAC INC	OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	2
	TORONTO, ONTARIO CANADA		DRAWING NUMBER: 629-43W2640-511		ISSUE
YOUR CONNECTIO	YOUR CONNECTION TO QUALITY & SERVICE		PART NUMBER: 629-43W	2640-5T1	1



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

