

© - TE Connectivity. All Rights Reserved.

REVISIONS				
P	LTR	DESCRIPTION	DATE	APVD
	A2	REV PER ECN-22-150900	28APR2022	RK CSD


AMP
WIRE RANGE

24-20 AWG
STRANDED

1 WIRE INSULATION DIA .040 TO .100.

2 FINISH: BODY AND SLEEVE:
TIN PLATE PER ASTM B545.

3 MATERIAL: BODY AND SLEEVE,
COPPER PER ASTM B152
INSULATION: PVF²
COLOR- NATURAL

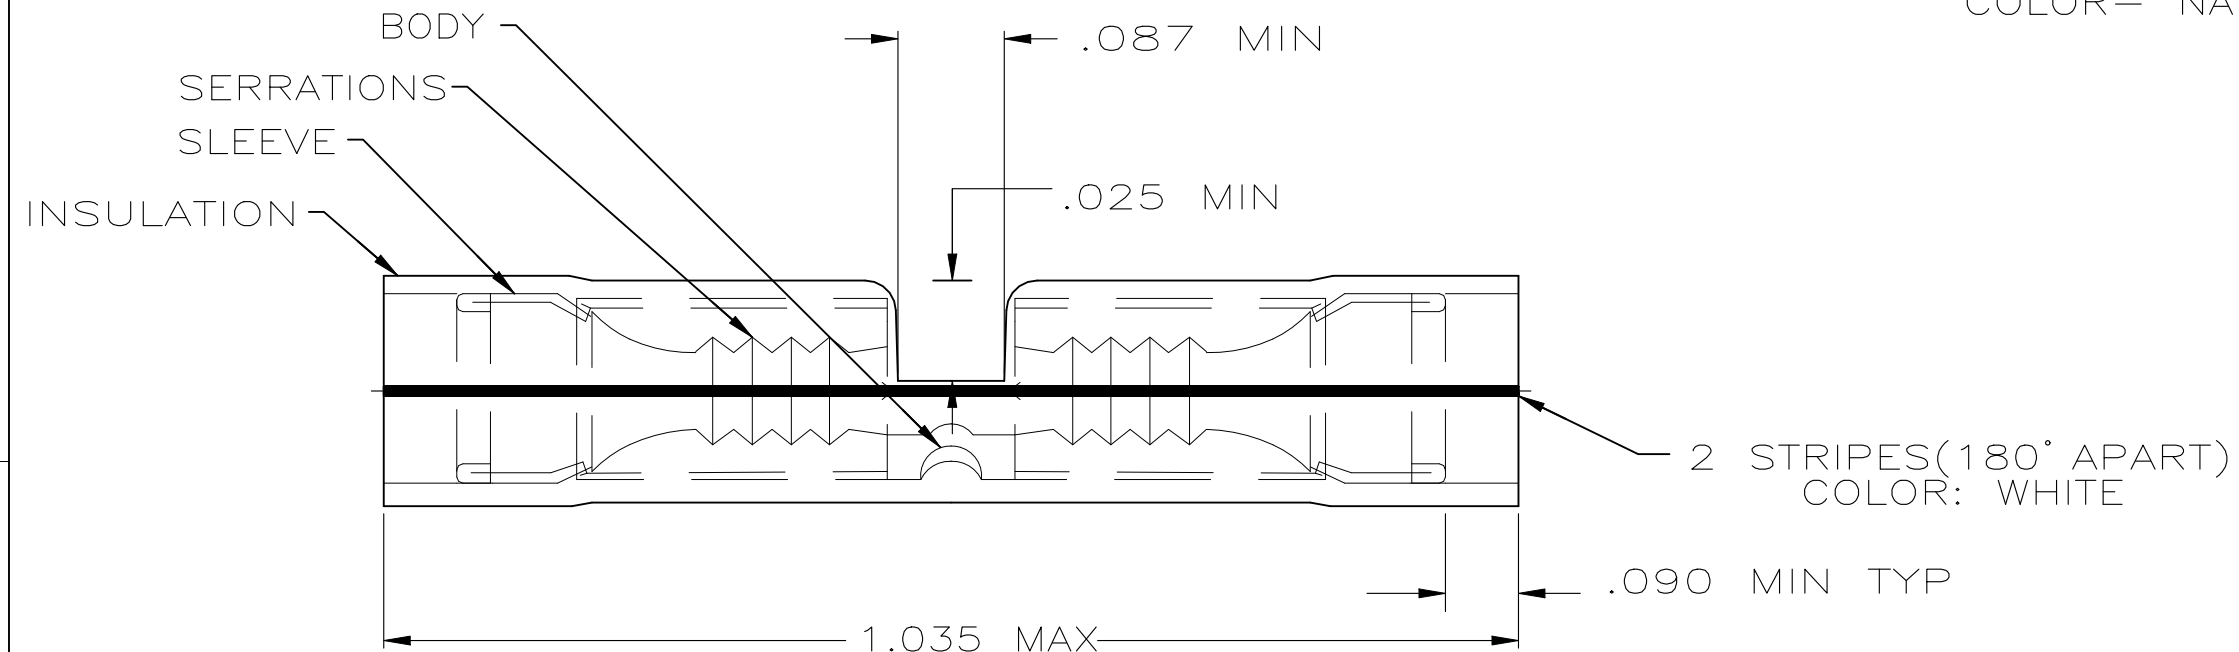

1000	LOOSE PIECE	696426-1
QTY	PACKAGE TYPE	PART NO.

AMP INCORPORATED CUSTOMER SERVICE SYSTEMS	
FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	PRODUCT INFORMATION CENTER 1-800-522-6752
FOR APPLICATION TOOLING INFORMATION	TOOLING ASSISTANCE CENTER 1-800-722-1111
FOR ORDER ENTRY	1-800-526-5142

MAX RECOMMENDED OPERATING TEMPERATURE: 150°C
VOLTAGE RATING: -
CIRCULAR MIL AREA: 0.16-0.65mm ² [202-1,290] STRANDED

THIS DRAWING IS A CONTROLLED DOCUMENT.	
DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED:
	0 PLC ± -
	1 PLC ± -
	2 PLC ± .008
	3 PLC ± -
	4 PLC ± -
	ANGLES ± -
MATERIAL	FINISH
- 3	- 2

DWN JR RUTH 19AUG05	NAME SPLICE, BUTT, PVF2 , P.I.D.G. WIRE SIZE: 24-20 AWG
CHK T MICHIELUTTI 19AUG05	
APVD T MICHIELUTTI 19AUG05	
PRODUCT SPEC	
APPLICATION SPEC	SIZE
WEIGHT	CAGE CODE
CUSTOMER DRAWING	DRAWING NO
	RESTRICTED TO

STE TE Connectivity			
SIZE A3	CAGE CODE 00779	DRAWING NO C-696426	RESTRICTED TO -
SCALE 1:1	SHEET 1 OF 1	REV A2	