
	τ	۵	н <b>т</b>	m	D	0
--	---	---	------------	---	---	---





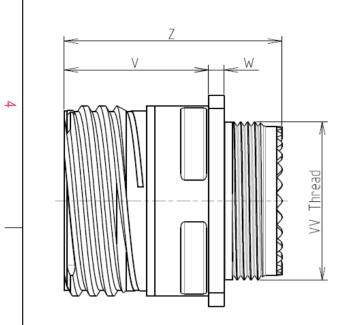

Keying Shown as example

Connector dimension

Е

Dim

## CHARACTERISTICS

SHELL SIZE : 13

PLATING : F = Nickel

Н

ω


-Standard : Based on MIL-DTL-38999 Series III

	CONTACT TYPE : Sta	ndard Crimp Contact	ORIENTATION : E		
	SHELL TYPE : Square	Flange Receptacle		Delivered W/O Contacts	
	BASIC SERIES:	8D 0 - 13 F 26 P E	L		
_	-Mass	: 14.72 g ± 10%			
	-Salt Spray	: 48 hours			
	-Temperature Range	: -65°C to +200°C			
	-Delivered without Sou	uriau contacts			
	-Durability	: 500 Mating cycles			
	-Contact Plating	: Gold over copper Alloy 0.8µm minimum	Z VV THREAD	31.5 Max M18x1-6g	
N	-Seals & Grommet	: Silicon Elastomer	W	2.1/2.5	
	-Contacts	: Copper Alloy	V	20.83+0/-1.25	
			S	28.6±0.3	
	-Insulator	: Thermoplastic	R2	20.62	
	-Shell Plating	: Nickel	R1	23.01	
	-Shell Material	: Aluminium	P PP	3.25±0.2 4.93±0.2	
_					

G

F

	Nominal
	3.25±0.2
SOURIAU shall not be liable for a	4.93±0.2
due to a use of the Products v	23.01
the Specifications issued by either	20.62
(professional recommend	28.6±0.3
	20.83+0/-1.25
Cour	2.1/2.5
FF	31.5 Max
	M18x1-6g

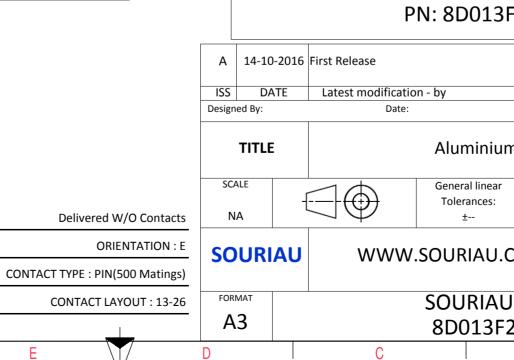

C 0 0 >						_
						4
LAY	OUT SHOWN AS EXA	AMPLE				3
SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.) Country Jurisdiction & Control List FR Not Listed PN: 8D013F26PEL						2
rst Release						
Latest modificatio	n - by	1			MOD N°	
Date: CUSTOMER DRAWING Aluminium Receptacle 8D series						
$\Box$	General linear Tolerances: ±		NPRDS / PI <b>859</b>			1
WWW.SOURIAU.COM       This document is the property of SOURIAU         it must not be reproduced or communicated without permission						
	SOURIAU I 8D013F26				SHEET 1/2	
С		В		Α		J

-	T	۵	н <b>г</b>	m	D	0
		Contact Layout				Panel Cutou
4	(	26			2 -	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
_	<b></b>	6#22D			y	
ω	Ctc A B C D E F 1 2	13-26         X       Y         0       3.47         2.47       4.34         2.47       -4.34         0       -3.47         -2.47       -4.34         -2.47       4.34         3.25       0         -3.25       0				Dim ØA ØA R1 ØT
	F					SOURIAU shall not be liable for any
						due to a use of the Products wh the Specifications issued by either of (professional recommendat
N						Countr FR
						PN: 8D013F
					A 14-10-20 ISS DATE	16 First Release Latest modification - by
					Designed By:	Date: Aluminium
_ <b>_</b>					SCALE NA	General linear Tolerances:
					SOURIA	U WWW.SOURIAU.C
				_	FORMAT A3	SOURIAU 8D013F2
L	Н	G	F	E	D	C

