


REV	ECRN	DATE
1	NEW PRODUCTION	20170406

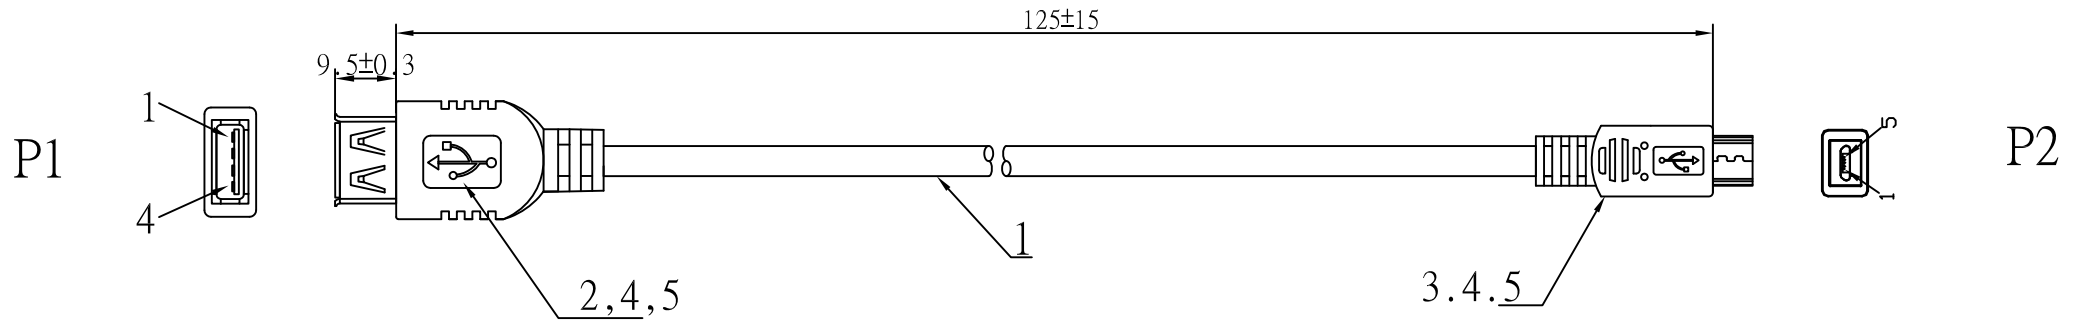


接线表

P1	P2
1 — RED	1
2 — WHITE	2
3 — GREEN	3
4 — BLACK	5
SHELL — SHELL	SHELL

- NOTES:
 1. ELECTRICAL TEST: 100% OPEN, SHORT & MIS WIRE TEST.
 2. CONTACT RESISTANCE: 10 ohm,
 3. INSULATOR RESISTANCE: 5M ohm.
 4. HIGH VOLTAGE: DC 300V 0.01sec.
 5. MUST BE ROHS COMPLIANT.

⑤	J.000008.0500R	TIN WIRE	TIN WIRE OD:0.8MM	2.5	G
④	C.060P03.0100R	MOLDING	PVC 60P RED	13.6	G
③	B.03005M.0N03R	CONNECTOR	MICRO USB-B 5P PIN GOLDED PLATED SHELL NICKEL PLASTIC:BLACK	1	PCS
②	B.01004F.0N00R	CONNECTOR	USB A/F 4P PIN GOLDED PLATED SHELL NICKEL PLASTIC:WHITE	1	PCS
①	A.011X03.0400R	CABLE	UL2725 28AWG(7/0.12TC)*1P+28AWG(7/0.12TC)*2C+AL+B(32/0.10TC) JACKET PVC 60P RED OD:4.0±0.1MM L=125MM±10MM	1	PCS
NO.	PART NO	ITEM	DESCRIPTION	Q'TY	UNIT

RoHS COMPLIANT		 朋联电子有限公司 DongGuan PengLian Electronics Co.,Ltd TEL:076938835098/38835095 FAX:076938835091			
		比例: FREE	TITLE: USB A/F TO MICRO USB B 5P		
DRAWN BY		單位: mm	SUPPLIER'S ITEM: 9.00ACCA1639.000R		
CHECKED BY		CUSTOMER: SPARK FUN			
APPROVED BY		CUSTOMER'S ITEM:			
		DRAWING NO. ACCA-1639		DATE	2017.04.06