

DIN rail perforated - NS 15 WH PERF 2000MM - 1204096

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



DIN rail perforated, Standard profile, width: 15 mm, height: 5.5 mm, acc. to EN 60715, material: Steel, Galvanized, white passivated, length: 2000 mm, color: silver



Key Commercial Data

Packing unit	5 pc
GTIN	
GTIN	4017918106430

Technical data

Dimensions

Height	5.5 mm
Length	2000 mm
Width	15 mm
Hole width	12.20 mm
Hole height	4.20 mm
Drill hole spacing	20.00 mm

General

Material	Steel
Coating	Galvanized, white passivated
Color	silver


Standards and Regulations

Test standard	acc. to EN 60715
Connection in acc. with standard	IEC / EN

Drawings

DIN rail perforated - NS 15 WH PERF 2000MM - 1204096

Dimensional drawing

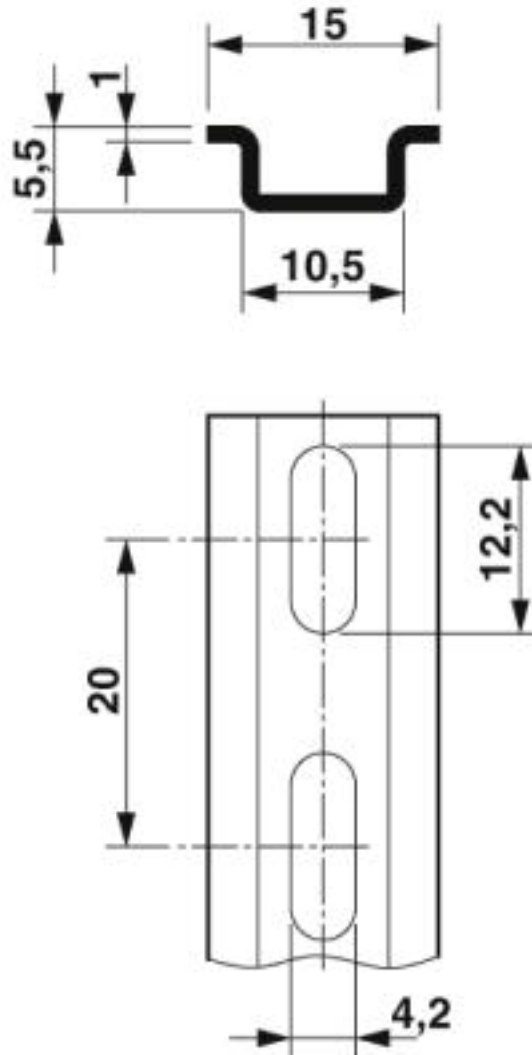

Phoenix Contact 2019 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>