

6

5




4

3

2

1

FEMALE FACE VIEW

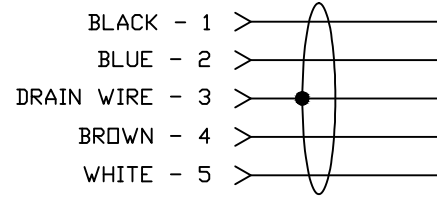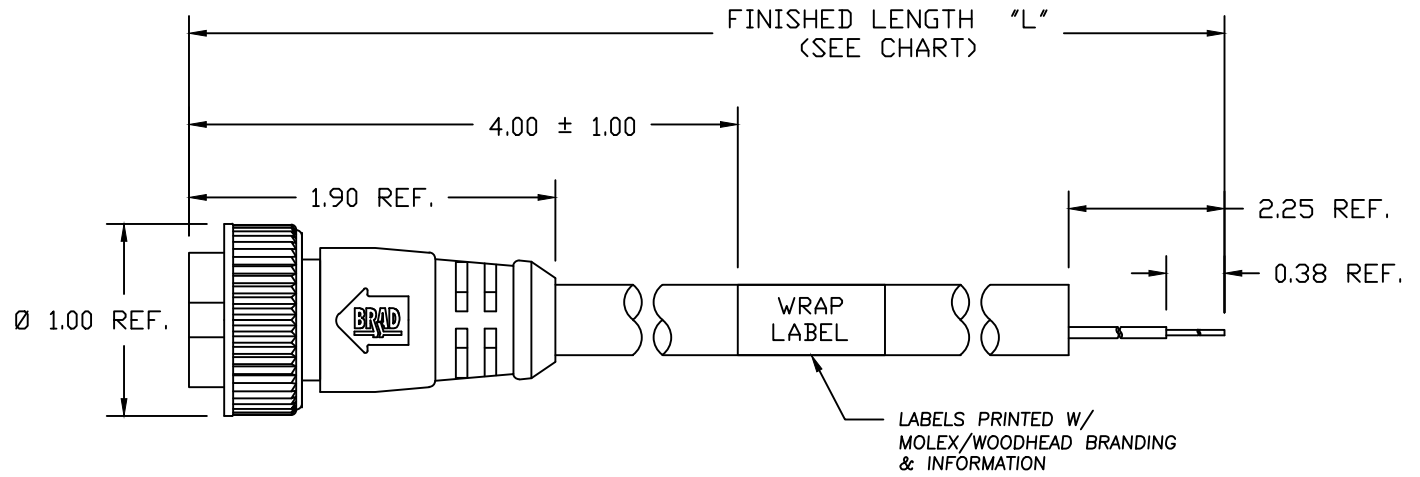

SPECIFICATIONS:

COUPLING NUT MATERIAL: ZINC DIE-CAST WITH
BLACK ELECTROPHORETIC COATING

CONTACT MATERIAL: GOLD/NICKEL OVER COPPER ALLOY

INSERT MATERIAL: YELLOW PVC

OVERMOLD: YELLOW PVC

CABLE: #22/4 BLACK PVC,
BRAIDED SHIELD w/ #22 DRAIN

ASSEMBLY RATINGS: 250V, 3A

ENVIRONMENTAL: -20°C TO +105°C,
IP67 WHEN MATED

SAP P/N#	"L" (FEET)	"L" (INCH)	TOLERANCE (INCH)
1300062308	12'	144"	+3.50/-0.0

A201213222-1 RELEASE EC NO: IFC2012-0162 DRWN: YOU 2011/12/28 CHKD: LHARTMAN APPR: JFMURPHY 2012/03/03	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE INCH ONLY		SCALE 1:1	DESIGN UNITS INCH	THIRD ANGLE PROJECTION	
	$\nabla=0$ $\nabla/C=0$	4 PLACES	mm	INCH	DRAWN BY DATE	TITLE			
		3 PLACES	±---	±---	YOU 2011/12/28	MC CABLE ASSY SPCL			
		2 PLACES	±.13	±.010	CHECKED BY DATE	5P FEM STRAIGHT			
1 PLACE	±.25	±.020	APPROVED BY DATE	#22/4 + DRN PVC CABLE					
		ANGULAR ± 5°		JFMURPHY 2012/03/03	MOLEX INCORPORATED				
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		MATERIAL NO.	SEE CHART			DOCUMENT NO.	
1	REV			SIZE A	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				
					SD-130006-042			SHEET NO. 1 OF 1	

6

5

4

3

2

1