


## 200MS22ACMACSTD

Aliases (A902GP200V220AV212) Not for New Design MS/A902, Aluminum Electrolytic, 200 uF, -0/+25%, 220 VAC, -20/+60°C

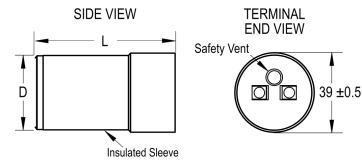

General Information				
Series	MS/A902			
Dielectric	Aluminum Electrolytic			
Description	Motor Start Aluminum Electrolytic			
RoHS	Yes			
Lead	Quick Connect			
AEC-Q200	No			
Halogen Free	Yes			
Shelf Life	156 Weeks			

Specifications				
Capacitance	200 uF			
Capacitance Tolerance	-0/+25%			
Voltage AC	220 VAC			
Temperature Range	-20/+60°C			
Rated Temperature	60°C			
Life	500 Hrs			

Click here for the 3D model.

Dimensions	
D	38mm +/-0.5mm
L	116mm MAX

Packa	-		

Packaging

Bulk, Bag

Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute - and we specifically disclaim - any warranty concerning suitability for a specific customer application or use. This Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by us with reference to the use of our products is given gratis, and we assume no obligation or liability for the advice given or results obtained.