
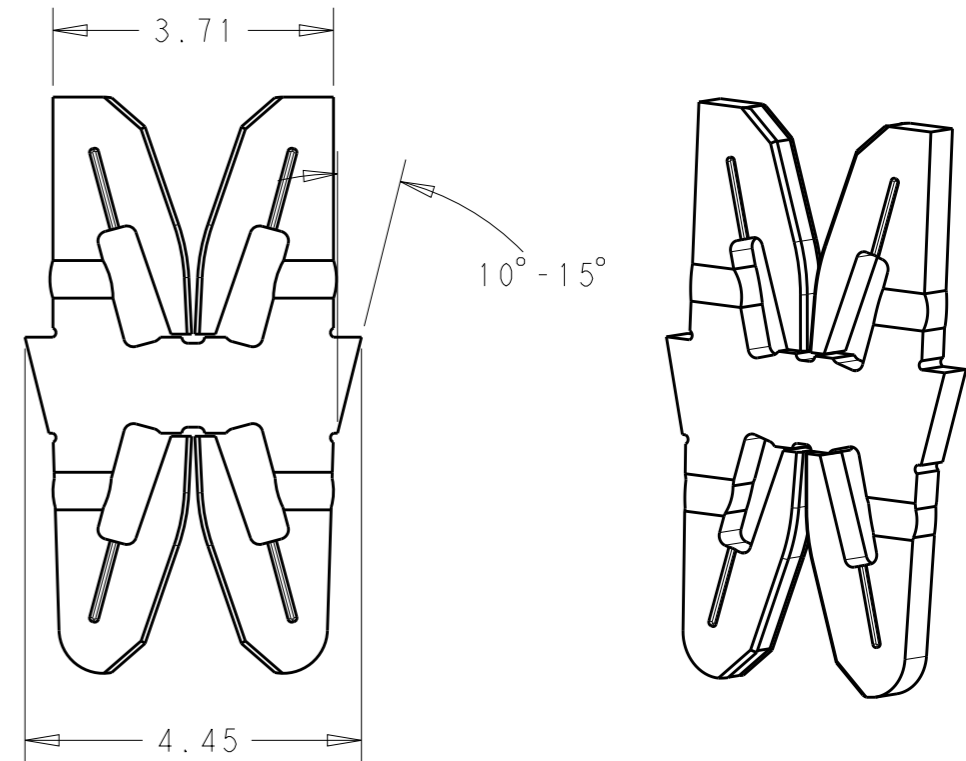



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
 © COPYRIGHT 20 BY - ALL RIGHTS RESERVED.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	RELEASE TO PRODUCTION	23JUN2020	JA	TD

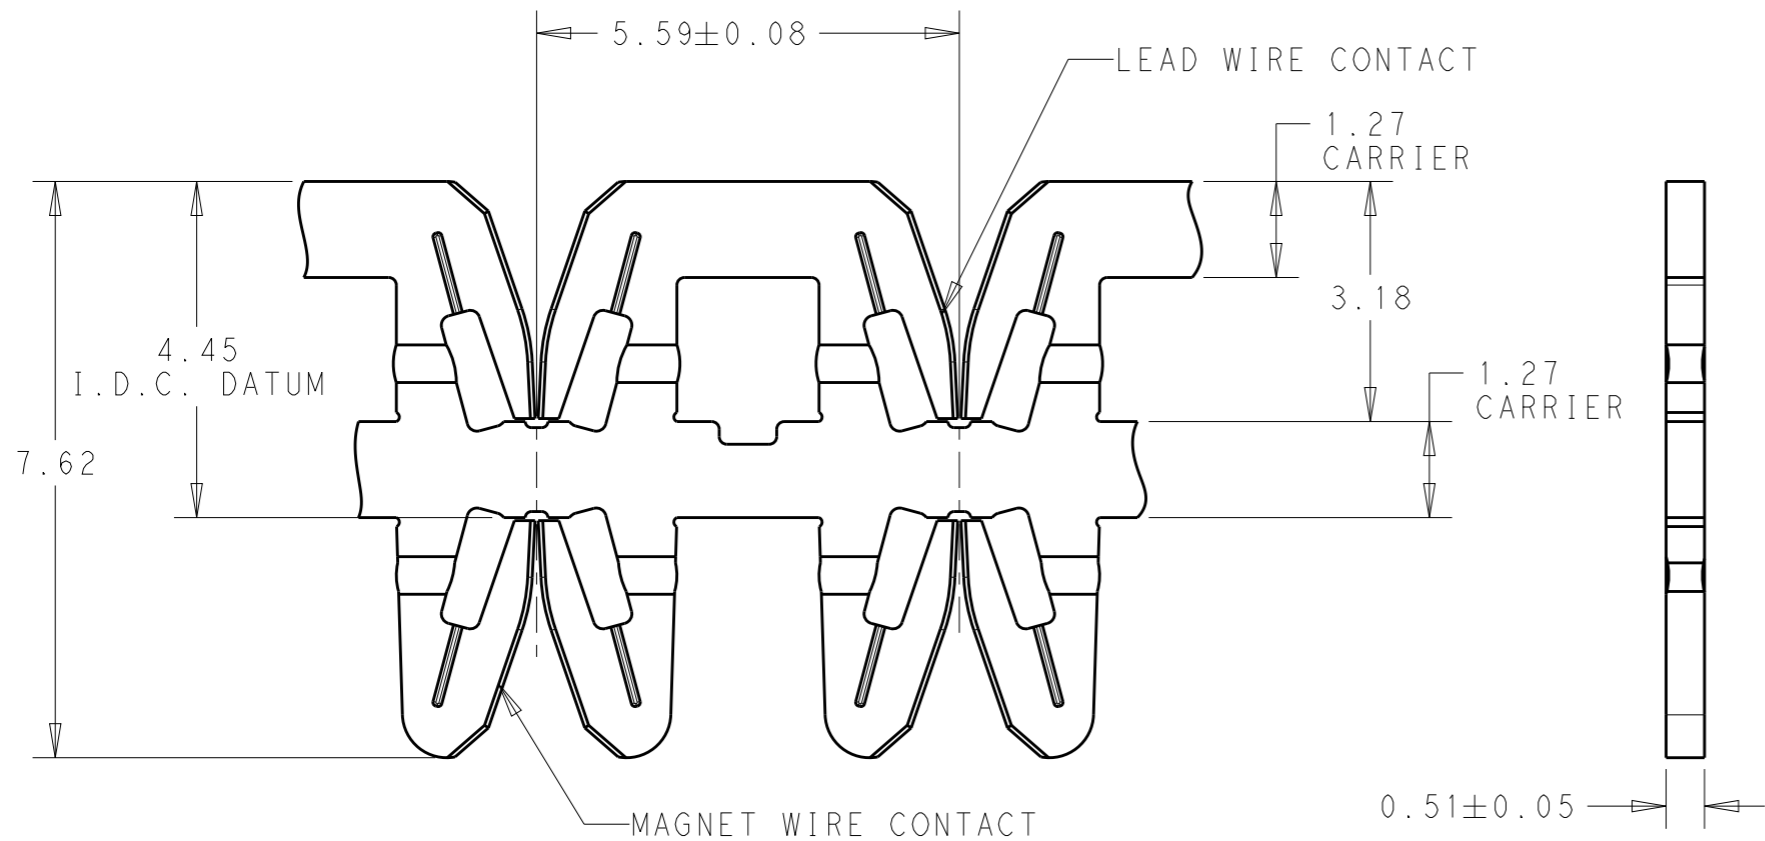

LOOSE PIECE CONFIGURATION
4-2322343-()


TERMINALS TO UNWIND FROM REELS AS SHOWN
2322343-()

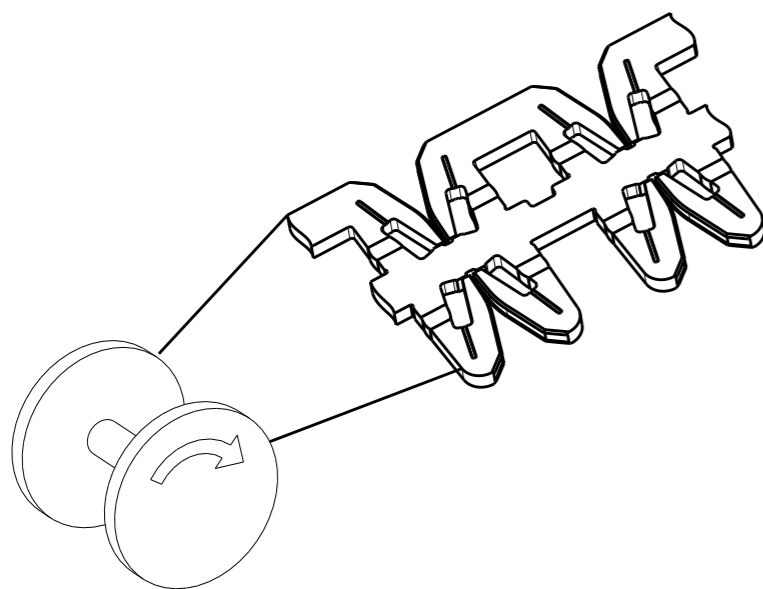

NOTES

- 1 SPECIFICATION
MAGNET WIRE 0.45-1.00mm ALUMINUM WIRE
0.3-0.8mm² STRANDED, BONDED OR SOLID WITH PVC INSULATION.
MAXIMUM INSULATION OUTSIDE DIAMETER IS 2.90mm, NO STRIPPING REQUIRED.
- 2 POCKET RECOMMENDATION
1601421 FOR SINGLE TERMINAL
1601433 FOR DOUBLE BUSSED TERMINALS
1601440 FOR TRIPLE BUSSED TERMINALS
- 3 TERMINAL APPLICATION TO COMPLY WITH TE CONNECTIVITY SPECIFICATION 114-13166, FIG. 3

2322343-2
PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 08NOV2018 JUSTIN HUANG	 TE Connectivity	
DIMENSIONS: mm		CHK 08NOV2018 TIM DING		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD 08NOV2018 SENTHIL KUMAR	NAME WIRE TO WIRE, STD SIAMEZE TERMINAL FOR AL WIRE	
0 PLC ±- 1 PLC ±- 2 PLC ±0.13 3 PLC ±- 4 PLC ±- ANGLES ±2°		PRODUCT SPEC 108-2085	RESTRICTED TO	
MATERIAL BRASS SPRING HARD		FINISH POST TIN	APPLICATION SPEC - 3	SIZE A3
		WEIGHT -	CAGE CODE 00779	DRAWING NO C-2322343
		CUSTOMER DRAWING	SCALE 10:1	SHEET 1 OF 1
				REV A