


THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.




ISSUE NUMBER ORIGINAL

 $3.18 \pm 0.38$ 5.8 9 9.50 ±0.25

.X ±0.25 .XX ±0.13 .XXX ±0.10



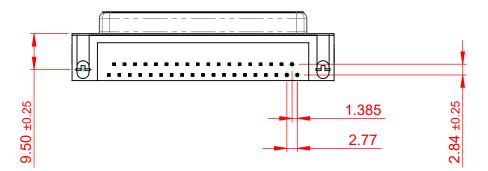

## NOTES:

MATERIAL:

**HOUSING:** THERMOPLASTIC POLYESTER, UL94V-0

SHELL: STEEL, NICKEL PLATED

PART NUMBER:

CONTACT: COPPER ALLOY, 15µ GOLD PLATING

OPERATING TEMPERATURE: -55°C TO +125°C

**CURRENT RATING:** 3A PER CONTACT

**CONTACT RESISTANCE:**  $25m\Omega$  MAX. **INSULATOR RESISTANCE:** 5000MΩ min.

**DIELECTRIC** 

WITHSTANDING VOLTAGE: 1000V AC rms

## THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

YOUR CONNECTION TO QUALITY & SERVICE

EDAC INC TORONTO, ONTARIO CANADA

622 SERIES D-SUB CONNECTOR

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC..AND SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

SW REFERENCE NO.: 622 ASSEMBLY		
DRAWN: C.B	DATE: AUG. 01/2018	
CHECKED:	DATE:	
SCALE: (IN C.A.D. 1:1)	SHEET 1 OF 1	
DRAWING NUMBER: 622-037-368-542		

622-037-368-542