



Introducing Modular Dual Barrier Terminal Blocks

This dual barrier is a single row, modular product and is molded in both two and three position sizes with interlocking features. This allows end users to create multiple position sizes, while only having to carry inventory on two part numbers. Centerline spacing may be maintained within tolerance up to sixteen positions.



KEY FEATURES

- Modular design, 2 and 3 position housings with interlocking features
- Screw termination
- 0.325 inch centerline spacing
- UL 94V-0 rated housing, black
- Nickel plated steel screws

APPLICATIONS

Commercial and Industrial equipment where field wiring of devices is necessary

- Power supplies
- Industrial controls
- HVAC control boards
- Security & Alarm controls

ELECTRICAL

UL rated for 15 amps, 300 volts Operating Current:

MATERIAL

UL94V-0 rated Polyamide Contacts : Tin over nickel plated copper alloy

MECHANICAL


Suggested screw torque is 12 in-lbs

Operating temperatures are -40° to 105°C

PRODUCT OFFERING

Position Size	Part Number	Color
2	1977477-2	Black
3	1977477-3	Black

PRODUCT DIMENSIONS

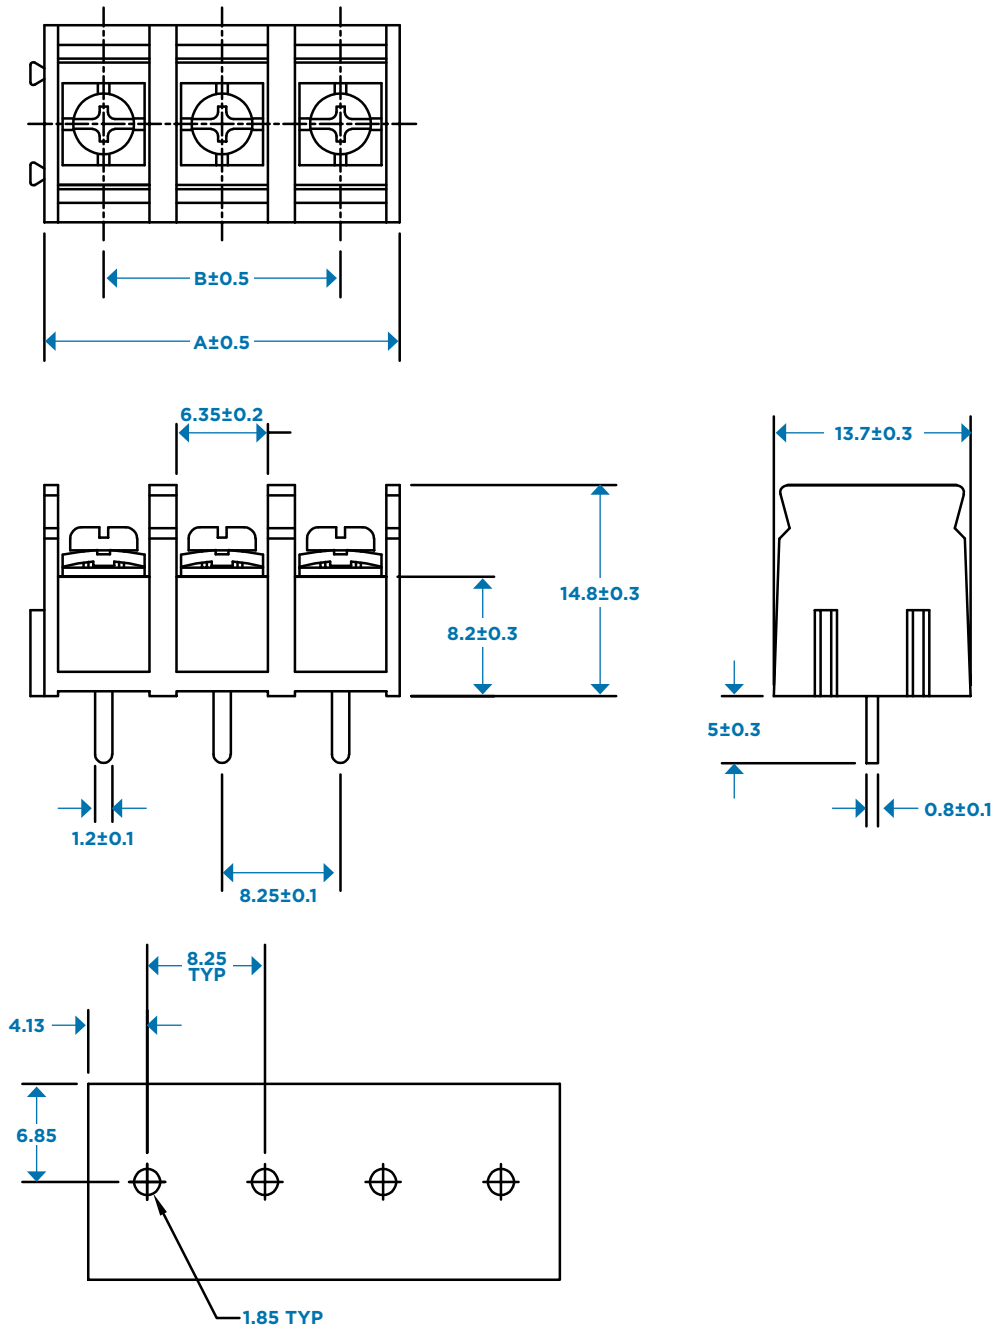

FOR MORE INFORMATION

te.com

TE Technical Support Center

Internet:	te.com/help
USA:	+1 (800) 522-6752
Canada:	+1 (905) 475-6222
Mexico:	+52 (0) 55-1106-0800
Latin/S. America:	+54 (0) 11-4733-2200
Germany:	+49 (0) 6251-133-1999
UK:	+44 (0) 800-267666
France:	+33 (0) 1-3420-8686
Netherlands:	+31 (0) 73-6246-999
China:	+86 (0) 400-820-6015

Part numbers in this brochure are RoHS Compliant*, unless marked otherwise.

*as defined www.te.com/leadfree

te.com

© 2011 Tyco Electronics Corporation, a TE Connectivity Ltd. company. All Rights Reserved.

6-1773454-9 CIS PDF 08/2011

TE Connectivity and the TE Connectivity (logo) are trademarks. Other logos, product and/or company names might be trademarks of their respective owners.

While TE has made every reasonable effort to ensure the accuracy of the information in this brochure, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. TE reserves the right to make any adjustments to the information contained herein at any time without notice. TE expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. The dimensions in this catalog are for reference purposes only and are subject to change without notice. Specifications are subject to change without notice. Consult TE for the latest dimensions and design specifications.

