

COIL: @ 25°C

CUSTOMER DATA SHEET

WINDING #1

WINDING #2

975 OHMS ±10%

975 OHMS ±10%

8.8 mADC MUST OPERATE

8.8 mADC MUST OPERATE

16.0-29.0 VDC NOM. VOLTAGE

16.0-29.0 VDC NOM. VOLTAGE


ENVIRONMENT:

VIBRATION 10 CPS TO 3000 CPS @ 30 g's

SHOCK 150 g's 11 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: SET AND RESET TIME 4 MS MAX.
CONTACT BOUNCE 2 MS MAX.

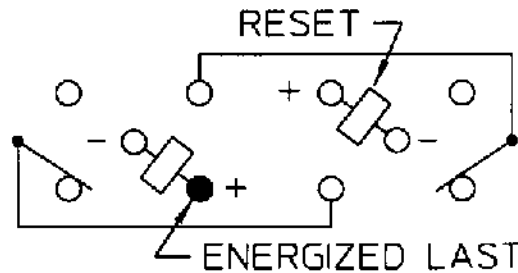

CONTACT RATING: LOW LEVEL TO 2A
28 VDC RESISTIVE 100,000 OPERATIONS

DR. R.B. 3/24/98 *CR 3/25/98 RB*

COMMUNICATIONS
INSTRUMENTS, INC.

CUST. C. I. I. STD.
CUST. NO. _____

TYPE "3SAM" RELAY

3SAM6015M2