

	T	Ω	нт. П	m	0



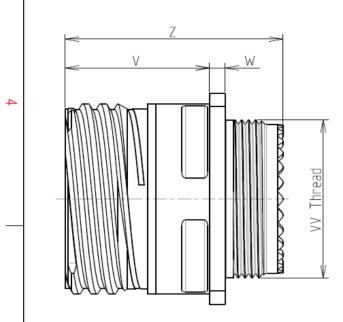

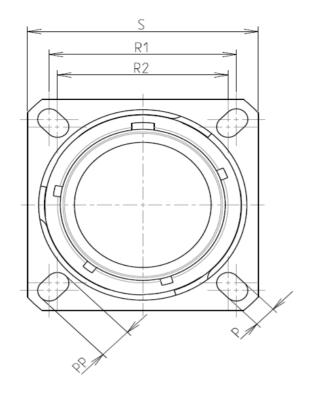

Keying Shown as example

CHARACTERISTICS

ω

 \sim


-Mass

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Aluminium
-Shell Plating	: Black Zinc Nickel
-Insulator	: Thermoplastic
-Contacts	: Copper Alloy
-Seals & Grommet	: Silicon Elastomer
-Contact Plating	: Gold over copper Alloy 0.8µm minimum
-Durability	: 500 Mating cycles
-Delivered without Sou	iriau contacts
-Temperature Range	-65℃ to +175℃
-Salt Spray	: 500 hours

: 14.72 g ± 10%

Connector dimension				
Dim	Nominal			
Р	3.25±0.2			
PP	4.93±0.2			
R1	23.01			
R2	20.62			
S	28.6±0.3			
V	20.83+0/-1.25			
W	2.1/2.5			
Z	31.5 Max			
VV THREAD	M18x1-6g			

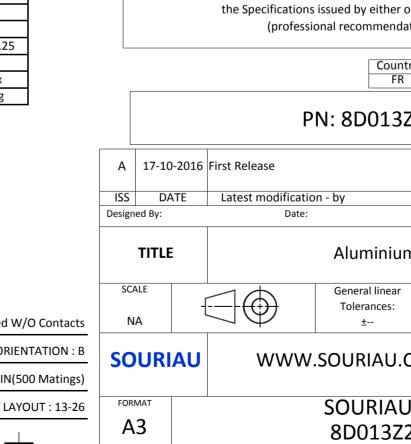

				TITLE
BASIC SERIES: 8D 0 - 13	Z 26	Р	BL	SCALE
SHELL TYPE : Square Flange Receptacle			Delivered W/O Contacts	NA
CONTACT TYPE : Standard Crimp Contact			ORIENTATION : B	SOURI
SHELL SIZE : 13			CONTACT TYPE : PIN(500 Matings)	500107
PLATING : Z = Black Zinc Nickel			CONTACT LAYOUT : 13-26	FORMAT
				A3
H G		F	E	D

○ □ □ >							
						4	
LAY	POUT SHOWN AS EXA	MPLE				3	
SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.) Country Jurisdiction & Control List FR Not Listed							
Р	N: 8D013Z2	6PBL					
rst Release Latest modification - by MOD N°							
Date: CUSTOMER DRAWING Aluminium Receptacle 8D series							
$\exists \bigoplus$	General linear Tolerances: ±	NPRDS / PROJECT 859 This document is the property of					
WWW.SOURIAU.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission							
SOURIAU DRG N° SHE 8D013Z26PBL-C 1/2							
С		В		А		I	

_	T	۵	п п	m	D	0
		Contact Layout				Panel Cutou
4	(26			2 -	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
_		6#22D	l		V	
ω	Ctc A B C D E F 1 2	13-26 X Y 0 3.47 2.47 4.34 2.47 -4.34 0 -3.47 -2.47 -4.34 -2.47 4.34 3.25 0 -3.25 0				Dim ØA ØAA R1 ØT
						SOURIAU shall not be liable for any
						due to a use of the Products wh the Specifications issued by either of (professional recommendat
N						Countr FR
						PN: 8D013Z
					A 17-10-20 ISS DATE	16 First Release Latest modification - by
					Designed By:	Date: Aluminium
_					SCALE NA	General linear Tolerances:
					SOURIA	U WWW.SOURIAU.C
				_	FORMAT A3	SOURIAU 8D013Z2
	Н	G	F	E	D	C

