

T	Q	П	m	0



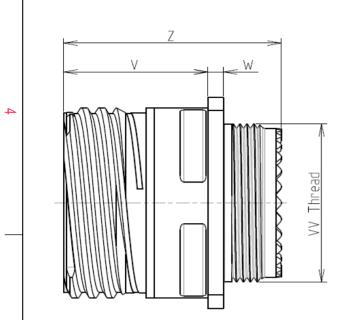

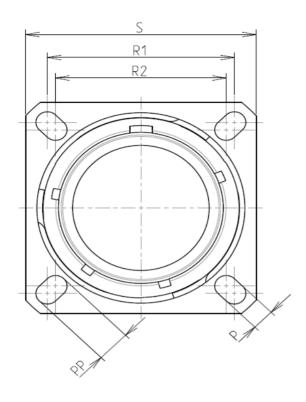

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

ယ

 \sim

-Mass

BASIC SERIES:

SHELL SIZE : 17

SHELL TYPE : Square Flange Receptacle

PLATING : K = Passivated

Н

CONTACT TYPE : Standard Crimp Contact

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Stainless Steel			
-Shell Plating	: Passivated			
-Insulator	: Thermoplastic			
-Contacts	: Copper Alloy			
-Seals & Gromme	t : Silicon Elastomer			
-Contact Plating	: Gold over copper Alloy 0.8µm minimum			
-Durability	: 500 Mating cycles			
-Delivered with Souriau contacts and Accessories				
-Temperature Ra	nge : -65°C to +200°C			
-Salt Spray	: 500 hours			

: 64.17 g ± 10%

8D 0

G

17

Κ

06

А


F

D

Connector dimension				
Connector unnension				
Dim	Nominal			
Р	3.25±0.2			
PP	4.93±0.2			
R1	26.97			
R2	24.61			
S	33.3±0.3			
V	20.83+0/-1.25			
W	2.1/2.5			
Z	31.5 Max			
VV THREAD	M25x1-6g			

Е

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recomment

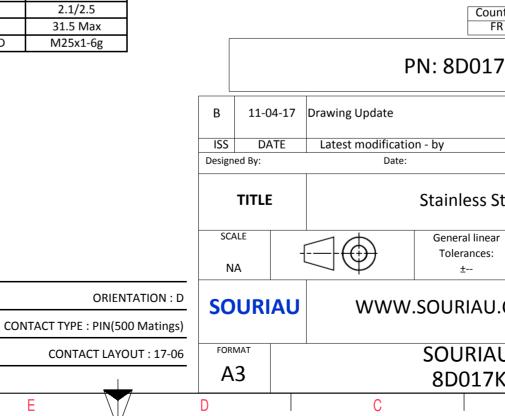

B A					
	4				
AS EXAMPLE	3				
r any non-conformity or damage s which does not comply with er of the Parties or by a third party ndation, technical notice.)					
untry Jurisdiction & Control List FR Not Listed	2				
7K06AD					
	N°				
CUSTOMER DRAWING Steel Receptacle 8D series					
ar NPRDS / PROJECT					
859 This document is the property of	1				
.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission					
VUDRG N° SHEE					
2K06AD-C 1/2 B A					

