
	エ	m		0			
CHARACTERISICS Schell Plating ::::::::::::::::::::::::::::::::::::							
Standard: Based on MIL-DTL-38999 Series III Dimeterior during of the series of the	Keying Shown as e			LAYOUT	SHOWN AS EXAMPLE		
- Durability ::500 Mating cycles - Durability :500 Mating cycles - Durability :500 Mating cycles - Durability :65°C to +200°C - Sait Spray :2000 hours - Mass :22.8 g ± 10% Mode Network MOD Network - Mass :22.8 g ± 10% Mode Network MOD Network SHELL SYPE :Plug with RFI Shielding CONTACT TYPE :Standard Crimp Contact SHELL SIZE : 13 CONTACT TYPE PLATING :M Net Netel CONTACT TAPE SOURIAU WWW.SOURIAU.COM This document is the property of communicated without permission CONTACT TYPE :SOURIAU SOURIAU DRG N° SHEET	-Standard : Based on MIL-DTL-38999 Series III -Shell Material : Composite -Shell Plating : Nickel -Insulator : Thermoplastic -Contacts : Copper Alloy -Seals & Grommet : Silicon Elastomer	Dim Nominal ØS 29.4 Max Z' 31.5 Max		due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.)			
-Mass : 22.8 g ± 10% -Mass : 22.8 g ± 10% Hass : 22.8 g ± 10% Hold No Base : 22.8 g ± 10%	-Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessories -Temperature Range : -65°C to +200°C		A 18-10-2016				
BASIC SERIES: 8D 5 - 13 M 08 S A SCALE <td< td=""><td></td><td></td><td>ISS DATE</td><td>Latest modification - by</td><td></td><td>CUSTOMER DRAWING</td><td>MOD N°</td></td<>			ISS DATE	Latest modification - by		CUSTOMER DRAWING	MOD N°
BASIC SERIES. BD SUB			TITLE Composite Plug 8D series		series		
SHELL SIZE : 13 CONTACT TYPE : SOCKET(500 Matings) SOURIAU www.SOURIAU.COM it must not be reproduced or communicated without permission PLATING : M = Nickel CONTACT LAYOUT : 13-08 FORMAT SOURIAU DRG N° SHEET	SHELL TYPE : Plug with RFI Shielding				olerances:	859 This document is the prop	perty of
			SOURIAU	WWW.SO	URIAU.COM	it must not be reproduc	
	PLATING : M = Nickel	CONTACT LAYOUT : 13-08					

-	Ŧ	۵	п П	m	D	0
		Contact Layout				
4		$x \begin{pmatrix} g \\ g$				
		Contacts (Insert arrangement 13-8) tact (biton Contact location X-axis Y-axis (mm) A +.065 (1.65) +.157 (3.99) B +.170 (4.32) +.000 (0.00) C +.120 (3.05) 120 (3.05) D 000 (0.00) 170 (4.32) E 120 (3.05) 120 (3.05) F 170 (4.32) +.000 (0.00) G 065 (1.65) +.157 (3.99) H +.000 (0.00) +.044 (1.12)				
ယ	Shell Arrangement Nu size no. co 13 -8	Imber of Size Service Contact Supersed ontacts contacts rating location 8 20 I All MS20051				
	-					SOURIAU shall not be liable for an due to a use of the Products w the Specifications issued by either o (professional recommenda
N						PN: 8D513
					A 18-10-20 ISS DATE Designed By:	16 First Release Latest modification - by Date:
					SCALE	Compo General linear
					SOURIA	U WWW.SOURIAU.C
					FORMAT A3	SOURIAU 8D513M
L	Н	G	F	E	D	C

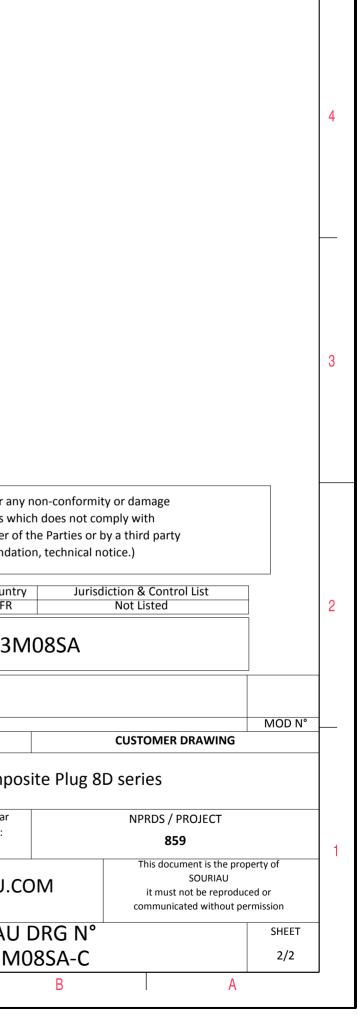

 \triangleright

σ