



.XX ±0.13 .XXX ±0.05



ISSUE NUMBER	
ORIGINAL	1

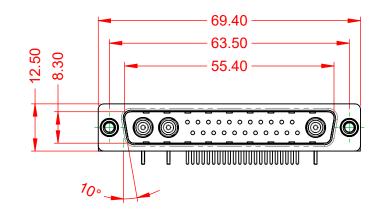



NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, TIN PLATED COPPER ALLOY, GOLD FLASH PLATED

10.67 Œ $\overline{\mathbf{o}}$

POWER/CO-AX CONTACT RATING:	75Ω (IMPEDAN
(IF PRESENT)	
SIGNAL CONTACT CURRENT RATING:	5A PER CONTA
SIGNAL CONTACT RESISTANCE:	10mΩ MAX.
INSULATOR RESISTANCE:	5000MΩ min.

DIELECTRIC

WITHSTANDING VOLTAGE:


OPERATING TEMPERATURE:

NCE)

-55°C ~ 125°C

ACT

1000V AC rms



	SW REFERENCE NO.: 629 COMBO ASSEMBLY			
COMBINATION D-SUB		DRAWN: C.B	DATE: JAN. 01/20	19
			DATE:	
EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	2
		DRAWING NUMBER: 629-25W	3240-7T6	ISSUE
YOUR CONNECTION TO QUALITY & SERVICE		PART NUMBER: 629-25W	3240-7T6	1



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

