
TOLERANCE UNLESS OTHERWISE SPECIFIED DO NOT MAKE MANUAL REVISIONS TO MASTER.






(1)

ORIGINAL





NOTES:


MATERIAL: HOUSING: THERMOPLASTIC POLYESTER, UL94V-0 SHELL: STEEL, Sn or Ni PLATED CONTACT: COPPER ALLOY SEE ORDERING GUIDE FOR PLATING

OPERATING TEMPERATURE: -55°C ~ 125°C


.X ±0.25 .XX ±0.13

.XXX ±0.05

SIGNAL CONTACT CURRENT RATING: 5A PER CONTACT SIGNAL CONTACT RESISTANCE: $10m\Omega$ MAX. INSULATOR RESISTANCE: $5000M\Omega$ min. DIELECTRIC WITHSTANDING VOLTAGE: 1000V AC rms



	COMBINATION D-SUB			SW REFERENCE NO.: 630 COMBO ASSEMBLY			
				DRAWN:	C.B	DATE: JAN. 01/20	19
				CHECKED:		DATE:	
		EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND	SCALE:	(IN C.A.D. 1:1)	SHEET 1 OF	4
		TORONTO, ONTARIO CANADA TO QUALITY & SERVICE	SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWING NUMBER: 630-11W		1640-4TA	ISSUE
Y	YOUR CONNECTION TO			PART NUM	IBER: 630-11W	1640-4TA	1






12.50

7.90

10°

THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

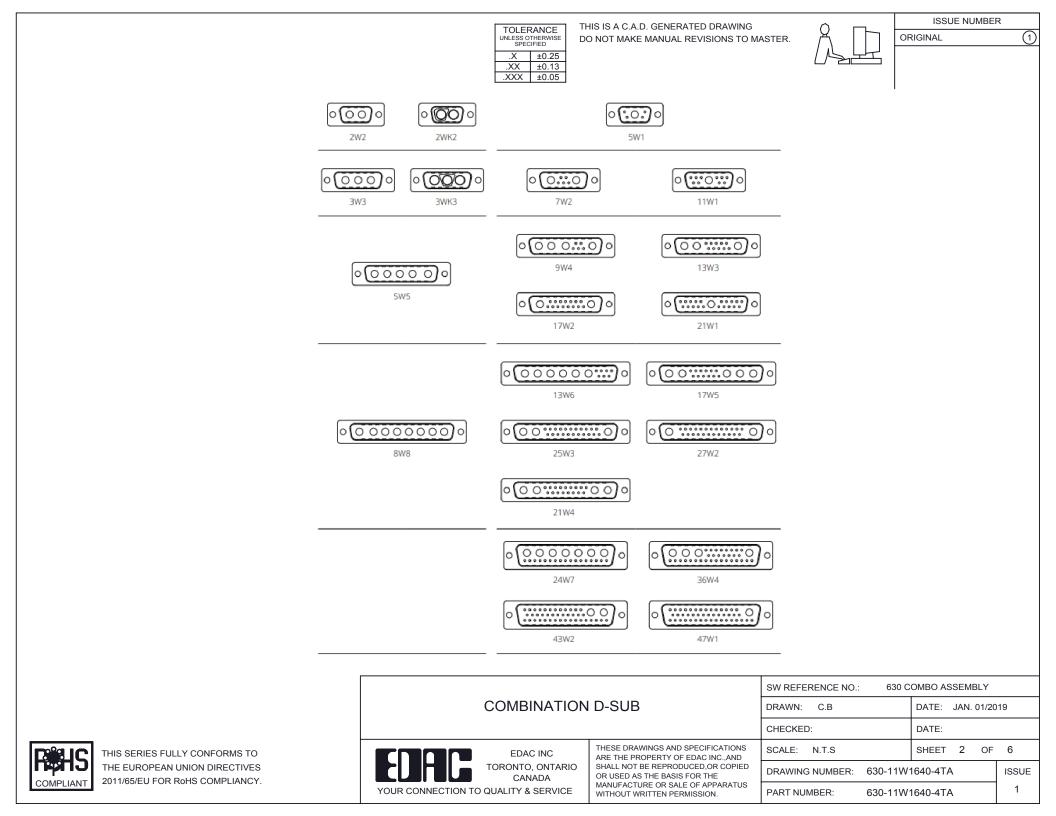



THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.



2W2 / 2WK2

3W3 / 3WK3

5W1 Male/Female

7W2 Male/Female





ISSUE NUMBER

(1)

5W5 Male



PCB EDGE


8W8 Male



PCB EDGE




POB EDGE




PCB EDGE

27W2 Male/Female

21W4 Male/Female



21W1 Male/Female




SW REFERENCE NO. 630 COMBO ASSEMBLY COMBINATION D-SUB C.B DATE: JAN. 01/2019 DRAWN: CHECKED: DATE: THESE DRAWINGS AND SPECIFICATIONS 3 OF 4 SCALE: N.T.S SHEET EDAC INC ARE THE PROPERTY OF EDAC INC..AND TORONTO, ONTARIO SHALL NOT BE REPRODUCED, OR COPIED 630-11W1640-4TA DRAWING NUMBER: ISSUE OR USED AS THE BASIS FOR THE CANADA MANUFACTURE OR SALE OF APPARATUS 1 YOUR CONNECTION TO QUALITY & SERVICE PART NUMBER: 630-11W1640-4TA WITHOUT WRITTEN PERMISSION.

5W5 Female

COMPLIANT




8W



PCB EDGE

CURRENT RATING / ØA 10A / 2.2 20A / 3.3 30A / 3.7 40A / 4.2




THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.



/8	Female		
	. 63.	.50	
	31.75	· 1	
- 1	22.83	22.97	



17W2 Male/Female



TOLERANCE UNLESS OTHERWISE SPECIFIED DO NOT MAKE MANUAL REVISIONS TO MASTER.

















13W3 Male





25W3 Male






2.77

24.77

PCB EDGE

31.75

36W4 Female

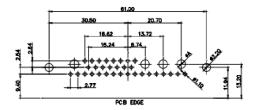

13W6 Male





22.18

2.77

20.78

13W6 Female

13W3 Female

 .X
 ±0.25

 .XX
 ±0.13

 .XXX
 ±0.05

43W2 Female





17W5 Male










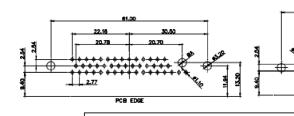

20.70

13.72


PCB EDGE



2.77

PCB EDGE

PCB EDGE



				SW REFERENCE NO.: 630 COMBO ASSEMBLY		
	COMBINATION	DRAWN: C.B	DATE: JAN. 01/20)19		
			CHECKED:	DATE:		
THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES	EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND	SCALE: N.T.S	SHEET 4 OF	4	
	EDAC INC TORONTO, ONTARIO CANADA	OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS	DRAWING NUMBER: 630-11W	1640-4TA	ISSUE	
COMPLIANT 2011/65/EU FOR RoHS COMPLIANCY.	YOUR CONNECTION TO QUALITY & SERVICE		PART NUMBER: 630-11W	1640-4TA	1	