
Designed By: Date: CUSTOMER DRAWING Designed By: Date: CUSTOMER DRAWING BASIC SERIES: 8D 5 11 X 99 P C SHELL TYPE: Plug with RFI Shielding 11 X 99 P C SCALE SCALE NA SEGURIAU NPRDS / PROJECT CONTACT TYPE: Standard Crimp Contact ORIENTATION : C SOURIAU SOURIAU This document is the property of SOURIAU.COM This document is the property of communicated without permission	т О т	m		0	Φ	A	
ACCURTENTICS Standard: Based on MLDTL-38090 Series III Shell Material Composite Shell Material Composite Shell Plating With Material Shell Plating Composite Social Plating Composite Social Plating Social Standard Social Plating Composite Plating Social Plating Colored Standard Social Plating Social Plating Social Plating Social Plating Social Plating Colored Plating Standard Social Plating Colored Plating Standard Socid Plating Socid Plating Standar							
CHARACTERISTICS Standard : Based on MIL-DTI-38999 Series III Shell Material ::::::::::::::::::::::::::::::::::::				LAYOUT SHO	VN AS EXAMPLE		
-Standard : Based on MIL-DTL-38999 Series III -Shell Material : Composite 2 Still Max -Shell Material : Composite 2 Still Max -Insulator : Thermoplastic -Contact Plating : Without Plating -Insulator : Thermoplastic -Contact Plating : Gold over copper Alloy -Seals & Grommet : Sill con Elastomer -Contact Plating : Gold over copper Alloy 0.8µm minimum -Durability : So O Maine cycles -Delivered with Souriace contacts and Accessories	Keying Show	wn as example					
Shell Material : Composite Shell Material : Composite Shell Plating : Without Plating -Insulator : Thermoplastic -Contacts : Copper Alloy -Seals & Grommet : Slicon Flastomer -Contact Plating : Gold over copper Alloy 0.8µm minimum -Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessories	CHARACTERISTICS						
Shell Plating Without Plating -Insulator : Thermoplastic -Insulator : Thermoplastic -Contacts : Coper Alloy -Seals & Grommet : Silicon Elastomer -Contact Plating : Gold over copper Alloy 0.8µm minimum -Durability : Sold over copper Alloy 0.8µm minimum -Temperature Range : 65°C to ±175°C -Sait Spray : 2000 hours -Mass : 11.8 g ± 10% BASIC SERIES: 8D 5 SHELL TYPE : Flag with RIT Shielding CONTACT TYPE : Standard Crimp Contact SHELL SZE : 11 ORIENTATION: C ORIENTATION: C CONTACT TYPE : PIN(500 Matings)	—						
-Insulator : Thermoplastic -Contacts : Copper Alloy -Seals & Grommet : Slicon Elastomer -Contact Plating : Gold over copper Alloy 0.8µm minimum -Durability : S00 Mating cycles -Delivered with Souriau contacts and Accessories		Z 31 Max					
-Contacts : Copper Alloy -Seals & Grommet : Silicon Elastomer -Contact Plating : Gold over copper Alloy 0.8µm minimum -Durability : Soud Adverse copper Alloy 0.8µm minimum -Premperature Range : - 65°C to +175°C -Salt Spray : 2000 hours -Mass : 11.8 g ± 10% BASIC SERIES: 8D - 11 SHELL TYPE : Standard Crimp Contact Shell LSZE : 11 ORIENTATION : C Sourial WWW.SOURIAU.COM Sourial Sourial		VV INKEAD WITOXT-DB		the Specifications issued by	either of the Parties or by a	third party	
Seals & Grommet Silicon Elastomer -Contact Plating Gold over copper Alloy 0.8µm minimum -Durability S00 Mating cycles Delivered with Souriau contacts and Accessories PN: 8D511X99PC -Temperature Range : 65°C to +175°C -Salt Spray : 2000 hours -Mass : 11.8 g ± 10% BASIC SERIES: 8D ShELL TYPE: Plug with RFI Shielding CONTACT TYPE : Standard Crimp Contact SHELL SZE:: 11 ORIENTATION: C SHELL SZE:: 11 ORIENTATION: C				(professional recom	mendation, technical notice	2.)	
-Contact Plating : Gold over copper Alloy 0.8µm minimum -Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessories -Temperature Range : -65°C to +175°C -Salt Spray : 2000 hours -Mass : 11.8 g ± 10% BASIC SERIES: 80 5 - 11 SHELL TYPE : Plug with RFI Shielding CONTACT TYPE : Standard Crimp Contact SHELL TYPE : Standard Crimp Contact SHELL SIZE : 11 ORIENTATION : C SOURIAU SOURIAU WWW.SOURIAU.COM				[Country Iurisdictio	on & Control List]
- Delivered with Souriau contacts and Accessories PN: 8D511X99PC - Temperature Range : -65°C to +175°C. -Salt Spray : 2000 hours - Salt Spray : 2000 hours -Mass : 11.8 g ± 10% - Mass : 11.8 g ± 10% -Mass : 11.8 g ± 10% BASIC SERIES: 8D 5 - 11 X 99 P C SHELL TYPE : Plug with RFI Shielding -Mass : 0.00TACT TYPE : Plug with RFI Shielding SHELL SIZE : 11 -Mass : 0.00TACT TYPE : Plug to the reproduced or communicated without permission	-Contact Plating : Gold over copper Alloy 0.8μm minimum						
-Temperature Range : -65°C to +175°C -Salt Spray : 2000 hours -Mass : 11.8 g ± 10% Mass : 11.8 g ± 10%	-Durability : 500 Mating cycles				F44V0000		
-Salt Spray : 2000 hours -Mass : 11.8 g ± 10% A 18-10-2016 First Release ISS DATE Latest modification - by MO Designed By: Date: CUSTOMER DRAWING Designed By: Date: CUSTOMER DRAWING Designed By: Date: CUSTOMER DRAWING FITLE Composite Plug 8D series SCALE General linear Tolerances: 859 ± 11 X 99 P C CUSTOMER DRAWING SHELL SIZE : 11 ORIENTATION : C SHELL SIZE : 11 ORIENTATION : C SHELL SIZE : 11 ORIENTATION : C	-Delivered with Souriau contacts and Accessories			PN: 8D	511X99PC		
-Salt Spray : 2000 hours -Mass : 11.8 g ± 10% A 18-10-2016 First Release ISS DATE Latest modification - by MO Designed By: Date: CUSTOMER DRAWING Designed By: Date: CUSTOMER DRAWING Designed By: Date: CUSTOMER DRAWING FITLE Composite Plug 8D series SCALE General linear Tolerances: 859 ± 11 X 99 P C CUSTOMER DRAWING SHELL SIZE : 11 ORIENTATION : C SHELL SIZE : 11 ORIENTATION : C SHELL SIZE : 11 ORIENTATION : C	-Temperature Range65°C to +175°C						
BASIC SERIES: 8D 5 - 11 X 99 P C Composite Plug 8D series BASIC SERIES: 8D 5 - 11 X 99 P C SHELL TYPE : Plug with RFI Shielding SCALE NA SCALE NPRDS / PROJECT 859 CONTACT TYPE : Standard Crimp Contact ORIENTATION : C ORIENTATION : C SOURIAU This document is the property of SOURIAU SOURIAU This document is the property of CONTACT TYPE : PIN(500 Matings) SOURIAU WWW.SOURIAU.COM This document is the property of CONTACT TYPE : PIN(500 Matings)	-Salt Spray : 2000 hours		A 18-10-2016	First Release			
BASIC SERIES: 8D 5 - 11 X 99 P C SHELL TYPE : Plug with RFI Shielding CONTACT TYPE : Standard Crimp Contact ORIENTATION : C SHELL SIZE : 11 X 99 P C SCALE NA SCALE NA SCALE NA SCALE NPRDS / PROJECT NA SCALE NA SCALE NA SCALE NA SCALE NA SCALE NA SCALE NA SCALE NA SCALE NA <	-Mass : 11.8 g ± 10%				CL	USTOMER DRAWING	MOD N°
BASIC SERIES. ab 3 1 X 95 P C Na Tolerances: 859 SHELL TYPE : Plug with RFI Shielding CONTACT TYPE : Standard Crimp Contact ORIENTATION : C NA SOURIAU This document is the property of SOURIAU.COM SHELL SIZE : 11 SHELL SIZE : 11 CONTACT TYPE : PIN(500 Matings) CONTACT TYPE : PIN(500 Matings) WWW.SOURIAU.COM This document is the property of communicated without permission			TITLE	С	omposite Plug 8D s	eries	
BASIC SERIES. SUP S III X SUP S		1	SCALE	Genera	linear		
SHELL TYPE : Plug with RFI shielding CONTACT TYPE : Standard Crimp Contact SHELL SIZE : 11			-	[- (⊕) Tolera	nces:		
CONTACT TYPE : Standard Crimp Contact ORIENTATION : C SOURIAU SOURIAU SHELL SIZE : 11 CONTACT TYPE : PIN(500 Matings) SOURIAU SOURIAU SOURIAU	SHELL TYPE : Plug with RFI Shielding				-		erty of
			SOURIAU	SOURIAU WWW.SOURIAU.COM SOURIAU it must not be reproduced or			
	SHELL SIZE : 11	CONTACT TYPE : PIN(500 Matings)				communicated without perr	nission
	PLATING : X = Without Plating	CONTACT LAYOUT : 11-99	FORMAT	SOUI	RIAU DRG N°		SHEET
A3 8D511X99PC-C 1		<u>_</u>	A3	8D5	511X99PC-C		1/2

	т	۵	п п	m		0
		Contact Layout				
4	-×	$ \begin{array}{c} & & & \\ & & & \\ & & & \\ & & $				
	Conta positi ID A B C C D E E G	X-axis (mm) Y-axis (mm) +.065 (1.65) +.113 (2.87) +.130 (3.30) +.000 (0.00) +.065 (1.65) 113 (2.87) 065 (1.65) 113 (2.87) 065 (1.65) +.113 (2.87) 065 (1.65) +.113 (2.87) 065 (1.65) +.113 (2.87) 065 (1.65) +.113 (2.87) +.000 (0.00) +.000 (0.00)	7			
ى	Shell Arrangement Numb size no. cont 11 -99 7	acts contacts rating location				
	L					
						SOURIAU shall not be liable for an due to a use of the Products wh the Specifications issued by either of (professional recommendat
N						PN: 8D511
					A 18-10-20 ISS DATE Designed By:	016 First Release
					TITLE	Compo
<u> </u>					NA	Tolerances:
					FORMAT	
			1		A3	SOURIAU 8D511X9
	Н	G	F	E	D	C

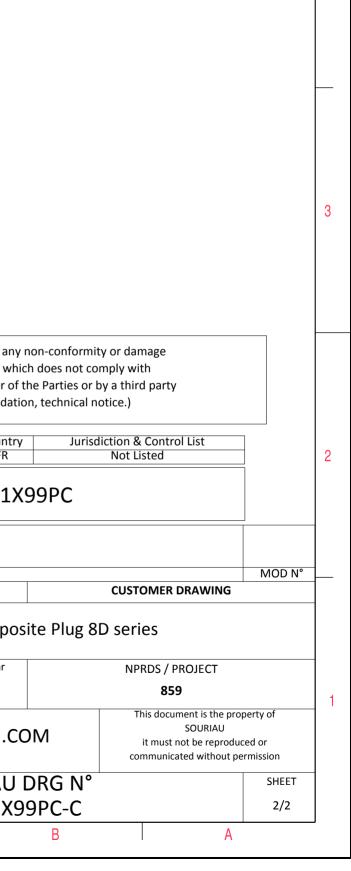

4