
	LAYOUT SHOWN AS EXAMPLE			
Keying Shown as example				
CHARACTERISTICS Connector dimension				
-Standard : Based on MIL-DTL-38999 Series III Dim Nominal -Shell Material : Composite ØS 29.4 Max -Shell Plating : Olive drab Cadmium Z' 31.5 Max -Insulator : Thermoplastic VV THREAD M18x1-6g -Contacts : Copper Alloy -Seals & Grommet : Silicon Elastomer -Contact Plating : Gold over copper Alloy 0.8µm minimum -Summer	SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.) Country Jurisdiction & Control List FR Not Listed			
-Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessories	PN: 8D513J26AC			
-Temperature Range -65°C to +175°C	A 17-10-2016 First Release			
-Salt Spray : 2000 hours - Mass : 17.9 g ± 10%		MOD N°		
	TITLE Composite Plug 8D series			
BASIC SERIES: 8D 5 - 13 J 26 A C SHELL TYPE : Plug with RFI Shielding	SCALE General linear NPRDS / PROJECT NA 859			
CONTACT TYPE : Standard Crimp Contact ORIENTATION : C	SOURIAU This document is the property of SOURIAU it must not be reproduced or			
SHELL SIZE : 13 CONTACT TYPE : PIN(500 Matings) PLATING : J = Olive drab Cadmium CONTACT LAYOUT : 13-26		communicated without permission SHEET		
		1/2		

_	Ŧ	۵	г п	m	D	0
		Contact Layout				
4		26				
		2#12 6#22D				
ω	Ctc A B C D E F 1 2	13-26 X Y 0 3.47 2.47 4.34 2.47 -4.34 0 -3.47 -2.47 -4.34 -2.47 -4.34 3.25 0 -3.25 0				
	_					SOURIAU shall not be liable for an
N						due to a use of the Products wh the Specifications issued by either o (professional recommendat Countri FR PN: 8D513.
					A 17-10-202 ISS DATE Designed By:	16 First Release Latest modification - by Date:
					TITLE	Compo
→					SCALE NA	General linear Tolerances: ±
					SOURIAU	WWW.SOURIAU.C
					FORMAT A3	SOURIAU 8D513J2
L	Н	G	F	E	D	C

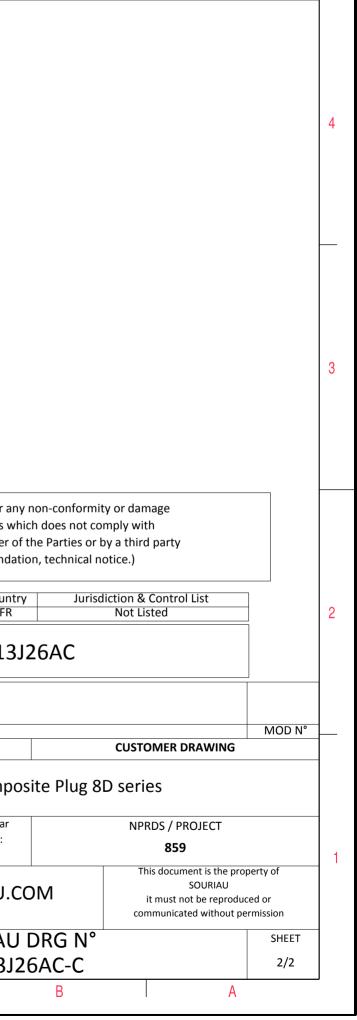

 \triangleright

σ