
	т (П		<b>C D</b>			
Z'	ØS					
			LAYOUT SHOWN AS EXAMPLE			
	Keying Shown as example					
CHARACTERISTICS	Connector dimension	]				
-Standard : Based on MIL-DTL-38999 Series III         -Shell Material       : Composite         -Shell Plating       : Olive drab Cadmium         -Insulator       : Thermoplastic	DimNominalØS32.5 MaxZ'31.5 MaxVV THREADM22x1-6g		SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.)			
-Contacts: Copper Alloy-Seals & Grommet: Silicon Elastomer			Country	Jurisdiction & Control List		
-Contact Plating : Gold over copper Alloy 0.8μm minimum -Durability : 500 Mating cycles	1		FR Not Listed			
-Delivered with Souriau contacts and Accessories			PN: 8D515J05AA			
-Temperature Range : -65°C to +175°C		A 19-10-2010	6 First Release			
-Salt Spray       : 2000 hours         - Mass       : 21.4 g ± 10%		ISS DATE Designed By:	Latest modification - by Date:	MOD N° CUSTOMER DRAWING		
		TITLE	Composite Pl			
BASIC SERIES: 8D 5 - 15	J 05 A A	SCALE	General linear Tolerances:	NPRDS / PROJECT 859		
SHELL TYPE : Plug with RFI Shielding CONTACT TYPE : Standard Crimp Contact		ENTATION : A		This document is the property of		
	CONTACT TYPE : PIN	SOURIAU	SOURIAU WWW.SOURIAU.COM SOURIAU it must not be reproduced communicated without perm			
SHELL SIZE : 15						
SHELL SIZE : 15 PLATING : J = Olive drab Cadmium		YOUT : 15-05	SOURIAU DRG	N° SHEET		

	<b>工</b>	G	г	m		0
4		Contact Layout $ \begin{pmatrix} \bullet & \bullet \\ \bullet & \bullet \\\bullet \\\bullet & \bullet \\\bullet \\$				
		X-axis (mm)         Y-axis (mm)           +.000 (0.00)         +.100 (2.54)           +.174 (4.42)         +.024 (0.61)           +.094 (2.39)        148 (3.76)          094 (2.39)        148 (3.76)          174 (4.42)         +.024 (0.61)				
ω						
						SOURIAU shall not be liable for ar due to a use of the Products w the Specifications issued by either o (professional recommenda
N						Count FR
						PN: 8D515
					A 19-10-20 ISS DATE	116 First Release
					Designed By:	Date:
					TITLE	Compo
<u> </u>					SCALE NA	General linear Tolerances:
					SOURIA	U WWW.SOURIAU.
					FORMAT A3	SOURIAL
	H	G	F	E		8D515J
					$\bigvee$	

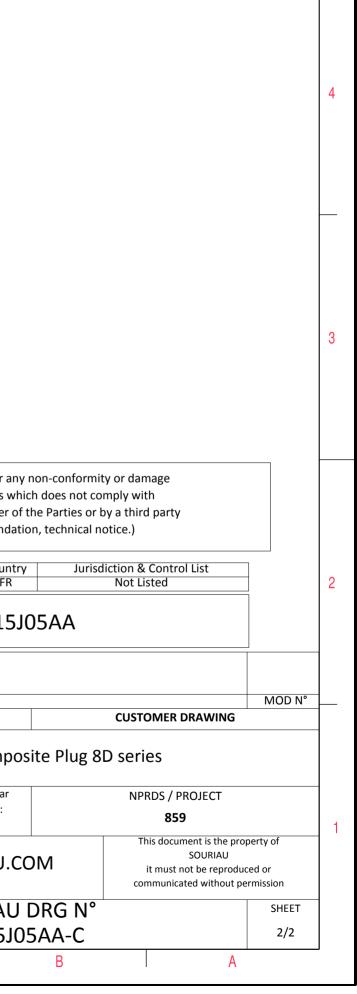

 $\triangleright$ 

σ