


REV	CHANGE	DATE	DRN	СНК
	Drawn	02/0817	SJ	Т

	TOLERANCE DETAILS							
1	D	+ 0.011 [ + 0.30] -0.000 [-0.00]	6	PD	+0.000 [+0.00] -0.012 [-0.30]			
2	L	±0.020 [±0.50]	7	PL	±0.016 [±0.40]			
3	W	+ 0.008 [ + 0.20] -0.000 [-0.00]	8	SD	±0.006 [±0.15]			
4	HD	+0.020 [+0.50] -0.008 [-0.20]	9	SL	±0.012 [±0.30]			
5	HL	±0.012 [±0.30]	10	TL	+0.000 [+0.00] -0.016 [-0.40]			

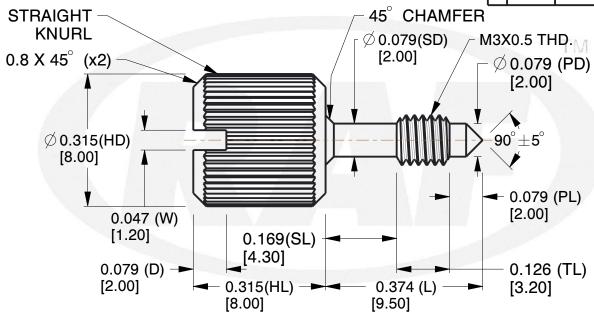

## NOTES:

- 1. Material: Stainless Steel
- 2. Finish:
- 3. ASME Y14.5-M 2009
- 4. All Drawing Dimensions are in Inches [mm]
- 5. Unless otherwise specified; Edge Breaks, Radii or Countersinks 0.005-0.015



95 Silvermine Rd., Seymour CT 06483 Tel: 203-888-2133,Fax: 203-888-9860

This Drawing is the Property of RAF. It contains confidential, proprietary information that is RAF property. Do not disclose to or duplicate for others except as authorized by RAF.

TOLERANCES			
ALL DIMENSIONS ARE INCHES			
(UNLESS OTHERWISE SPECIFIED)			
METALLIC			
LENGTHS =: 6 INCHES ± 0.005</td			

LENGTH >: 6 INCHES ±0.010 DIAMETERS: ±0.005 NON-METALLIC

INTERNAL THREADS: MINIMUM THREAD DEPTH

COMPONENT PANEL		SCREW	
		SCALE	
		4.38	
CAPTIVE PANEL SCREW	/ STYLE 2	SHEET	
0/11 11V2 1 / 11V2 2 00112V	. 0	1 of 1	