



DATE	REV	ECN	APP'D. BY
10-29-21	A0	11878	ABD
2-7-22	A1	11929	JME

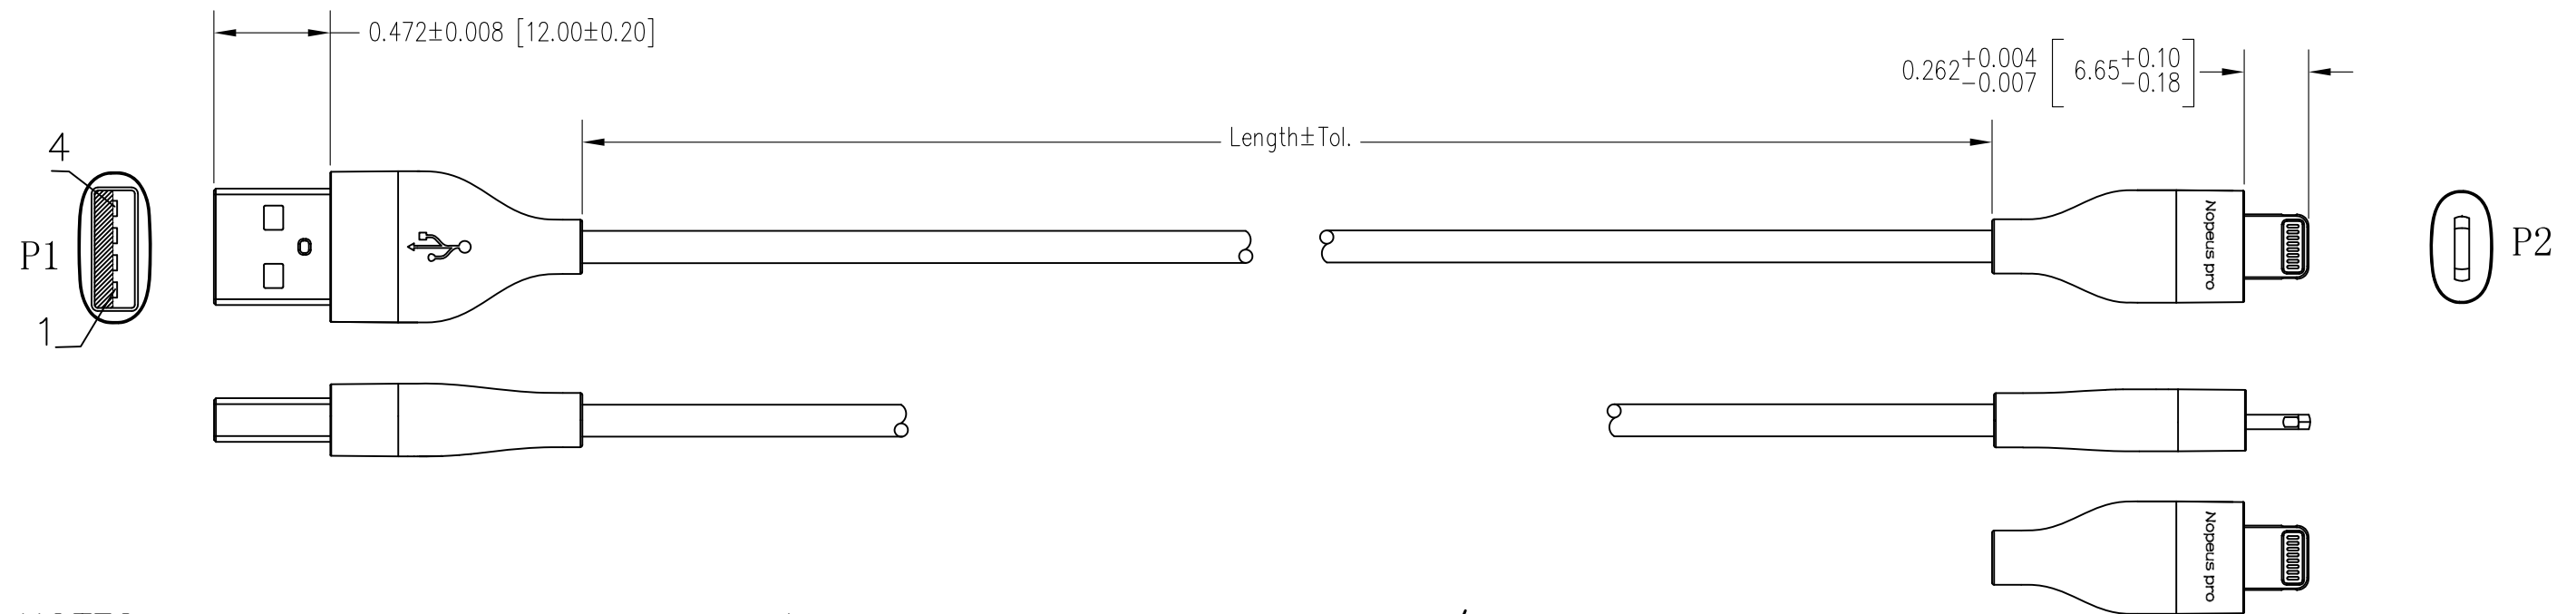

NOTES:

- 1) MFi CERTIFIED
- 2) EACH CABLE ASSEMBLY TO BE INDIVIDUALLY BAGGED.
- 3) CABLE CONSTRUCTION PVC
 - 3.7MM OD
 - WHITE JACKET
- 4) CONNECTOR P1: USB A MALE 2.0 WHITE INSULATOR,
 - NICKEL PLATED TIN SHELL
 - WHITE PVC EXTERIOR MOLDING
- 5) CONNECTOR P2: i5 C89
 - NICKEL PLATED TIN SHELL
 - WHITE PVC EXTERIOR MOLDING
- 6) ALL CABLES TESTED FOR CONTINUITY & SHORTS
 - CONTACT RESISTANCE 3 OHM MAX.
 - INSULATION RESISTANCE 10M OHM

P/N STRUCTURE:

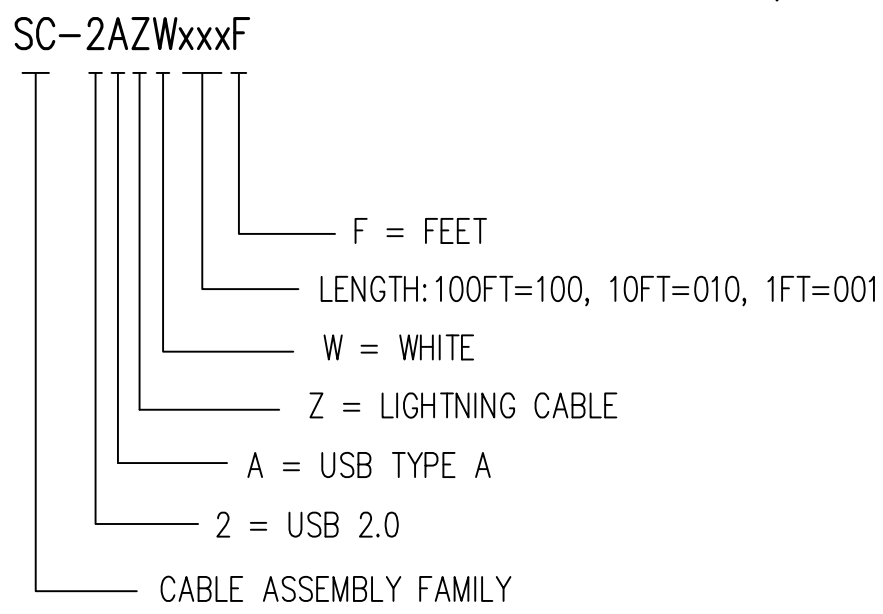

O/A Length Tolerance:

Metric
 915mm ±20mm
 1830mm ±30mm

Imperial
 3ft ±0.5in
 6ft ±0.75in

Pin Assignment			
USB AM			C89
1	Red	1	VBUS
2	White	2	D-
3	Green	3	D+
4	Drain	5	GND1
SHELL	Braid		SHELL

PART NUMBERS REFERENCE TABLE	
LENGTH	PART NUMBER
3 FT	SC-2AZW003F
6 FT	SC-2AZW006F



<p>THIRD ANGLE PROJECTION</p>	<p>206 Van Vorst Street Jersey City, NJ 07302 +1 201 432 0463 http://www.belfuse.com</p>						
<p>DO NOT SCALE DRAWING DRAWING IS SUBJECT TO CHANGE WITHOUT NOTICE</p>	<p>TITLE: USB 2.0 to i5 C89 Lightning Cable White</p>						
<p>DIMENSIONS: METRIC</p> <p>UNLESS OTHERWISE SPECIFIED TOLERANCES ARE ±0.13 ANGLES ARE ± 1°</p>	<p>THIS DRAWING AND THE SUBJECT MATTER SHOWN THEREON ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF BEL FUSE, INC. AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN ANY MANNER WITHOUT PRIOR WRITTEN CONSENT OF BEL FUSE, INC.</p>						
<p>SHEET NO. 1 OF 1</p>	<table border="1"> <tr> <td>DRN BY: JMM</td> <td>DATE 10-27-21</td> </tr> <tr> <td>APPD BY: ADB</td> <td>DATE 10-29-21</td> </tr> <tr> <td>DWG NO. CT999270</td> <td>REV. A1</td> </tr> </table>	DRN BY: JMM	DATE 10-27-21	APPD BY: ADB	DATE 10-29-21	DWG NO. CT999270	REV. A1
DRN BY: JMM	DATE 10-27-21						
APPD BY: ADB	DATE 10-29-21						
DWG NO. CT999270	REV. A1						