

**NOTES:** ±.001

- ① MAT'L: COPPER (STOCK TRN.  $\frac{.040}{1.02}$ )  
PLATING: ELECTRO TIN (.0003 MIN)
- ② TIN-PLATED BRASS FUNNEL: FERRULE

FILE NO. C-CD-401-01


STUD SIZES: ( $\pm .005$ )

- 02 = .094
- 04 = .119
- 06 = .146
- 08 = .173
- 10 = .198
- 14 = .265
- 56 = .328
- 38 = .390
- 209 = .209

"UL" LISTING # E32244  
"CSA" LISTING # 18689

WIRE SIZE: 12-10AWG  
4.0-6.0 MM<sup>2</sup>

ALL DIMENSIONS =  $\frac{\text{INCHES}}{\text{MM}}$  (MWID) DENOTES MAXIMUM WIRE INSULATION DIAMETER

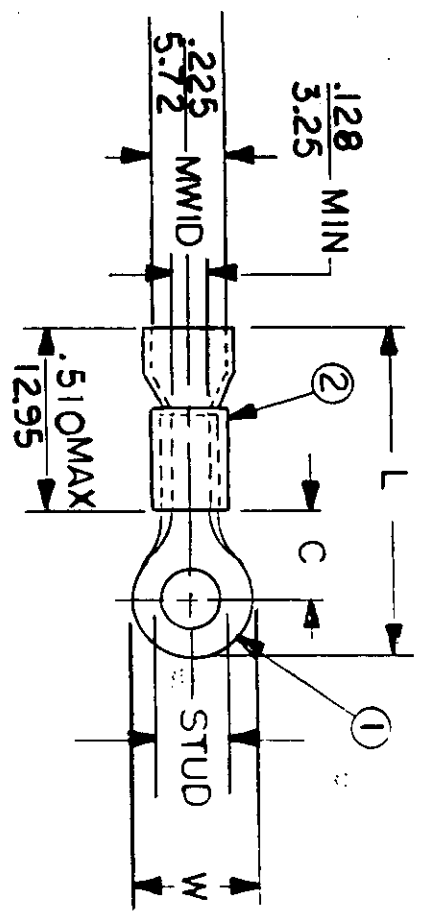

PART NUMBER	"W" ±.010	"C" MIN.	"L" MAX.	REFERENCE		SCALE	NTS	DATE	TITLE	DWG. NO.	A	CUSTOMER DWG
				MIN.	MAX.							
C-401-	.750	.611	1.531	15.52	38.89			11.19.84	RING TONGUE TERMINAL VIBRAKRIMP 400-SERIES			
C-428-	.375	.303	1.036	9.53	26.31			11.26.84				
C-430-	.530	.393	1.203	13.46	30.56							
C-436-	.282	.306	.992	7.16	25.20							
C-440-	.592	.468	1.307	15.04	33.20							
DIMENSIONAL TOLERANCES UNLESS OTHERWISE SPECIFIED										EIC molex INCORPORATED		
FRAC. DEC. ANG.										CHKD. BY: GZ		
± ± ±										APPRD. BY:		