

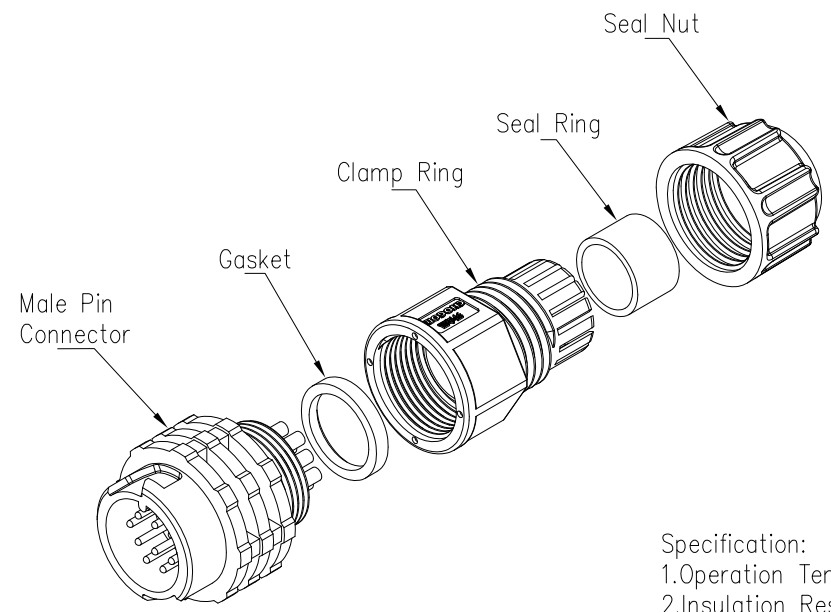

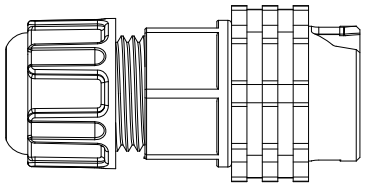


THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN CHOGORI PERSONNEL WITHOUT AUTHORIZATION FROM CHOGORI CORP.

REV.	ECN NO.	DESCRIPTION	SIGN	DATE
C1	N/A	INITIAL DRAWING	Hary	2020/05/23

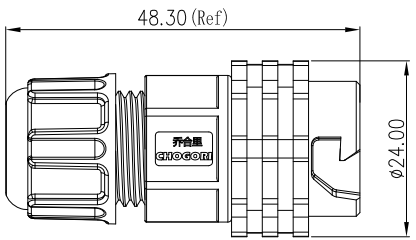

- Specification:
- 1.Operation Temperature: -45°C~105°C.
  - 2.Insulation Resistance: 100MΩ at DC500V.
  - 3.Contact Resistance: <10mΩ.
  - 4.Withstand Voltage: 1500V AC
  - 5.Operating Current: 10A
  - 6.Operating Voltage: AC 125V
  - 7.Waterproof Rate: IP67 (Mated)
  - 8.Seal Nut: Nylon, Black
  - 9.Seal Ring: Silicon, Black.
  - 10.Clamp Ring: Nylon, Black
  - 11.Gasket: Silicon, Red
  - 12.Male Pin: Copper Alloy, Gold Plated
  - 13.Connector: Nylon+GF, Black
  - 14.RoHS Compliant.
  - 15.UL Compliant.
  - 16.Mating Cap: 806-00076-00

23XXX331-XX Cable Range OD  
 01 OD: φ3.5mm~φ6.5mm  
 02 OD: φ6.5mm~φ9.5mm

Pin Number

12 Pin	18 Pin
P/N: 23012331-XX	P/N: 23018331-XX
Pin Assignments Front View	

UNIT: mm		DESCRIPTION	<b>CHOGORI</b> <sup>®</sup>		PART NO	23XXX331-XX	DRAWN BY	Hary	DATE	2020/05/23
TOLERANCE .X ±0.25 .XX ±0.15 .XXX ±0.05 ANGLES ±1°		Middle Series Push Lock Female Plug With Male Pin			SCALE:	1:1	DWG NO		CHECKED BY	Mo
REV.	C1	SIZE	A4	* : Inspection Item	CUSTOMER		APPROVED BY	Panson	DATE	2020/05/23