


RECOMMEND PCB-HOLE LAYOUT
COMPONENT SIDE SHOWN
TOLERANCE ± 0.05

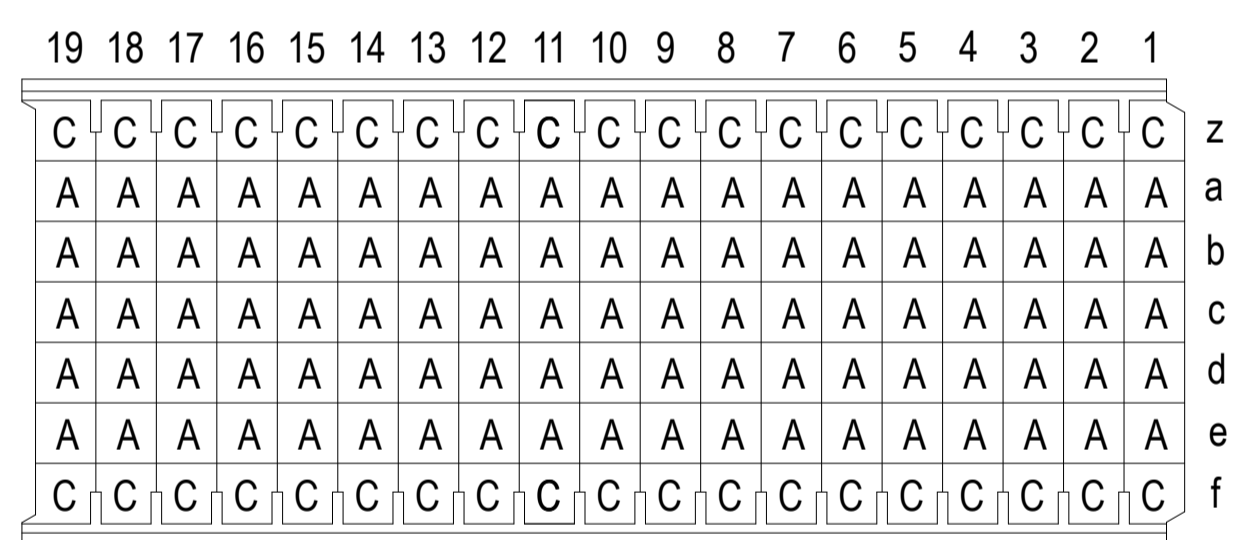

- 1 MATERIAL:
CONTACT: COPPER ALLOY.
HOUSING: GLASS-FILLED POLYESTER.
- 2 GENERAL PLATING SPECIFICATION: UNDERPLATING (ENTIRE CONTACT): $1.27 \mu\text{m}$ MIN NICKEL AND ACTION PIN: $0.5 \mu\text{m}$ MIN TIN.
FOR PLATING OF MATING SURFACES SEE APPLICABLE SPECIFICATION REFERENCE FOR EACH DASH NUMBER.
- 3 CONFORMS TO ALL TESTING ACCORDING TO IEC 61076-4-101 PERFORMANCE LEVEL 2.
- 4 CONNECTOR MARKED WITH PART NUMBER AND DATE CODE.

REVISIONS				
P	LTR	DESCRIPTION	DATE	APPROV
A		INITIAL DRAWING	18OCT2021	TL HL

$\frac{2}{3}$	2391903-1
FINISH	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	DIN TONY LI 27MAY2021	NAME MALE ASSEMBLY, Z-PACK 2mm HM, 133P TYPE B EON
	0-PLC ±	CHK ALEX XU 27MAY2021	SIZE A1
	1-PLC ±	APVD HOPE LU 27MAY2021	SCALE 4:1
	2-PLC ±	PRODUCT SPEC 108-19082	SHEET 1 of 1
	3-PLC ±	APPLICATION SPEC 114-160149	REV A
	4-PLC ±	WEIGHT 0	
	ANGLES ±	CUSTOMER DRAWING	
MATERIAL 1	FINISH SEE TABLE	00779 C=2391903	

STE TE Connectivity Ltd.