

THIS SERIES FULLY CONFORMS TO

THE EUROPEAN UNION DIRECTIVES

2011/65/EU FOR RoHS COMPLIANCY.

COMPLIANT

NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, NICKEL PLATED COPPER ALLOY, 30µ GOLD PLATED

OPERATING TEMPERATURE:

.XX

±0.13


10.70

5.80

.XXX ±0.05

POWER/CO-AX CONTACT RATING: 10A (CURRENT) (IF PRESENT) SIGNAL CONTACT CURRENT RATING: 5A PER CONTACT SIGNAL CONTACT RESISTANCE: $10m\Omega$ MAX.

INSULATOR RESISTANCE: DIELECTRIC WITHSTANDING VOLTAGE:

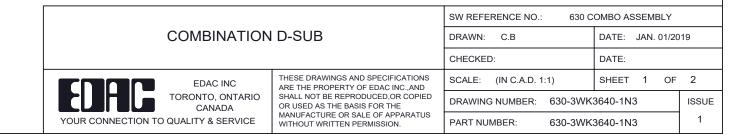

-55°C ~ 125°C

5000MΩ min.

1000V AC rms

