Mounting Option
In-Line Card Guides
Contact Detail
PC Tail .046x.013(1.:
.156 [3.96] Contact S


THIS IS A C.A.D. GENERATED DRAWING



ISSUE NUMBER

ORIGINAL

PC Tail .046x.013(1.17x0.33) - Tail LG=.213(5.41) .156 [3.96] Contact Spacing x .200 [5.08] Row Spacing

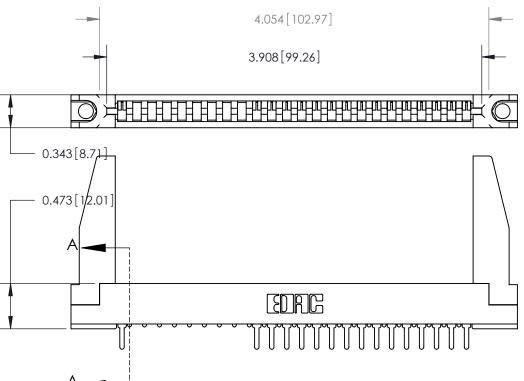

.175 [4.45] Point of Contact (Measured from bottom of Card Slot)

Card Slot Accepts .054 [1.37] to .070 [1.78] Thick P.C. Board

SECTION A-A

See Accompanying Pages for:

- Contact Bend Details
- Mounting Options
- Features and Specifications

807 Series High Temp Card Edge Connector Part Number: 807-024-525-178



EDAC INC TORONTO, ONTARIO CANADA

YOUR CONNECTION TO QUALITY & SERVICE WITHOUT WR

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

ACAD REFERENCE NO. 807 ENG MASTER					
DRAWN: J.LEE	DATE: AUG. 11/09				
CHECKED:	DATE:				
SCALE: NTS	SHEET 1 OF 4				
DRAWING NUMBER	ISSUE				
007.4	,				

807 Assembly





ISSUE NUMBE

ORIGINAL



Features

- CSA Approved and UL Recognized
- .156 (3.96) Contact Spacing x .200 (5.08) Row Spacing
- Accepts .062 (1.57) Nominal Thickness P.C. Board
- Low Profile Insulator Body .473 (12.01), with Card Guides
- Contact Termination Options include P.C. Tail, Wire Hole, Wire Wrap, 90 Degree & Extender Board Bends
- Single or Dual Row Configurations
- Large Variety of Mounting Options
- Pre-assembled Card Guides Available
- Accepts Between Contact and In-Contact Polarizing Keys

Specifications

- Insulator Material: DAP
- Contact Material: Copper, Nickel, Tin Alloy CA-725
- Contact Plating: Gold on the Mating Area, Tin on the Contact Tails, Nickel Underplate
- Current Rating: 5 Amperes Continuous
- Contact Resistance: 10 Milliohms Maximum
- Dielectric Withstanding Voltage: 1800 V AC rms at Sea Level Between Adjacent Contacts
- Insulation Resistance: 5000 Megohms Minimum
- Operating Temperature: -65 to +165 °C
- Insertion Force: 16 oz (4.45 N) Maximum per Contact Pair when Tested with a .070 (1.78) Thick Gauge
- Withdrawal Force: 1 oz (0.28 N) Minimum per Contact Pair when Tested with a .054 (1.37) Thick Gauge

807 Series High Temp Card Edge Connector Features and Specifications		ACAD REFERENCE NO. 807 ENG MASTER			
		DRAWN:	J.LEE	DATE: AU	G. 11/09
		CHECKED:		DATE:	
EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE	SCALE:	NTS	SHEET .	4 OF 4
TORONTO, ONTARIO		DRAWING	NUMBER		ISSUE
YOUR CONNECTION TO QUALITY & SERVICE	MANUFACTURE OR SALE OF APPARATUS	8	07 Assembly		1