

	т		G		т		т		D		C	
4				1 1 1 1								
ω					Kaning Cha						LAYOUT	r shown as ex,
					Keying Sho	wn as example		_				
	CHARACTERISTICS -Standard : Based on	MIL-DTL-38999 Seri	es III			Connect Dim	or dimension Nominal	-				
2	-Shell Material -Shell Plating -Insulator -Contacts -Seals & Grommet -Contact Plating -Durability -Delivered with Souria	: Composite : Nickel : Thermoplastic : Copper Alloy : Silicon Elastom : Gold over copp : 500 Mating cyc	er er Alloy 0.8µm mir les	nimum		ØS Z' VV THREAD	35.7 Max 31.5 Max M25x1-6g				SOURIAU shall not b due to a use of th the Specifications issu (professional <b>PN</b> :	ne Products which ed by either of t
	-Temperature Range -Salt Spray -Mass	<ul> <li>-65°C to +200°</li> <li>2000 hours</li> <li>31.3 g ± 10%</li> </ul>	с							DATE	First Release Latest modification - b Date:	у
<u> </u>	BASIC SERIES: SHELL TYPE : Plug wi		<b></b>	17 M	75 P E				SCALE NA	E -		Compos General linear Tolerances: ±
	CONTACT TYPE       : Standard Crimp Contact         SHELL SIZE : 17       CONTACT TYPE : PIN(500 Matings)								SOURIAU		WWW.SOURIAU.CO	
	PLATING : M =	Nickel			L			YOUT : 17-75	FORMAT A3			OURIAU 3D517M7
	Н		G		F		E		D		С	

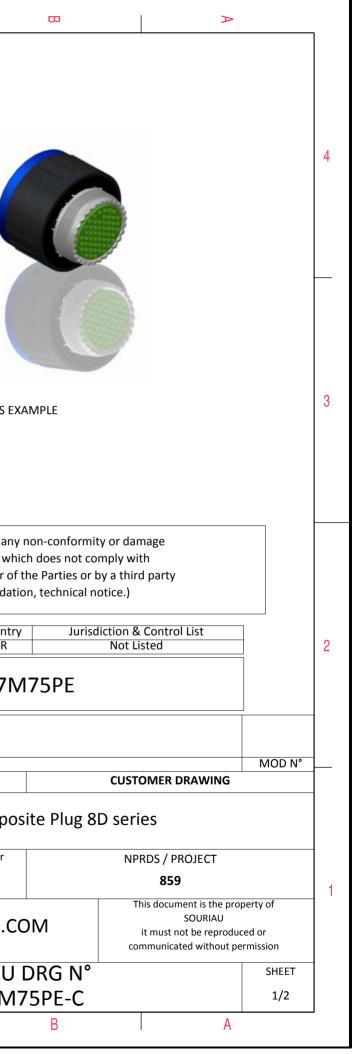

-	I	Q	нт —	m		0
4		Contact Layout 75				
	Ctc A B	2#8 Triax 17-75 X Y 0 4.75 0 -4.75				
ယ						
	_					SOURIAU shall not be liable for an due to a use of the Products wh the Specifications issued by either of (professional recommendat
N					A 17-10-20	Countr FR PN: 8D517N
					ISS DATE Designed By: TITLE	Date:
<b>→</b>					SCALE NA SOURIA	SOURIAU
	Н	G	F	E	A3 D	8D517M

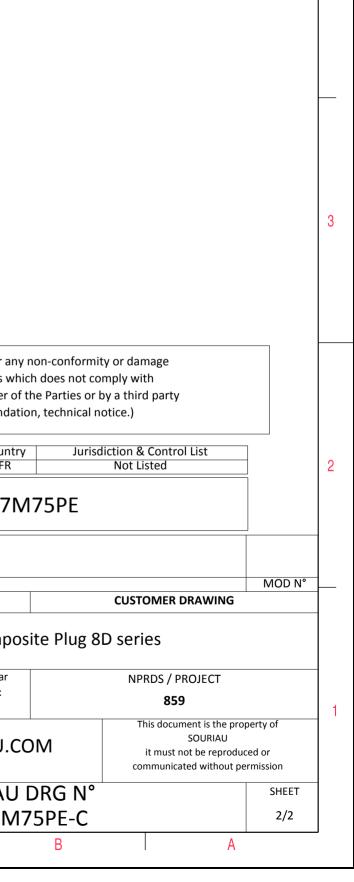

4