

Features

- Non-Magnetic Package Suitable for MRI Applications
- Rectangular MELF SMQ Ceramic Package
- Hermetically Sealed
- Low R_s for Low Series Loss
- Long t_L for Lower Intermodulation Distortion
- Low C_J for High Series Isolation
- High Average Incident Power Handling
- RoHS* Compliant

Applications

- Aerospace & Defense
- ISM


Description

The MA4P7452F-1072T is a surface mountable PIN diode in a non-magnetic, Metal Electrode Leadless Faced (MELF) package. The device incorporates Macom's time proven HIPAX technology to produce a low inductance ceramic package with no ribbons or whisker wires. Incorporated in the package is a hard glass passivated, CERMACHIP™ PIN chip that is full face bonded on both the cathode and anode to maximize surface area for the lowest electrical and thermal resistance. The package utilizes a non-magnetic plating process that provides for a package with extremely low permeability. This device has been comprehensively characterized both electrically and mechanically to ensure repeatable & predictable performance. The non-magnetic MA4P7452F-1072T is the electrical equivalent of its magnetic counterpart the MA4P7002F-1072T.

This diode is well suited for use in low loss, low distortion, high power switching circuits and can be used in high magnetic field environments at HF through UHF frequencies. The low thermal resistance of this device provides excellent performance at high RF power incident levels, up to 100 watts CW. This device is designed to meet the most demanding electrical and mechanical MRI environments.



1072

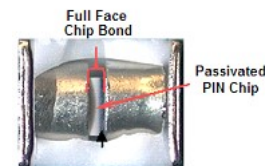

Diode Cross Section

Designed for Automated Assembly

These SMQ PIN diodes are designed for high volume tape and reel assembly. The rectangular package design provides for highly efficient automatic pick and place assembly techniques. The parallel flat surfaces are suitable for key jaw or vacuum pickup. All solderable surfaces are tin plated and compatible with reflow and vapor phase soldering methods.

Ordering Information

Part Number	Package
MA4P7452F-1072T	Tape and Reel

Electrical Specifications @ +25°C

Parameter	Test Conditions	Units	Min.	Typ.	Max.
Forward Voltage	$I_F = +100 \text{ mA}$	V_{DC}	—	—	1
Voltage Rating	$I_r = -10 \mu\text{A}$	V_{DC}	150	—	—
Total Capacitance	-100 V @ 100 MHz	pF	—	—	0.7
Series Resistance	+100 mA @ 100 MHz	Ω	—	—	0.9
Parallel Resistance	-10 V @ 100 MHz	k Ω	75	—	—
Carrier Lifetime	+6 mA / -10 mA @ (50% - 90% Voltage)	μs	—	9	—
I-Region Length	-	μm	—	175	—
CW Thermal Resistance	$I_H = 1\text{A}, I_L = 10 \text{ mA},$ $T = 1 \text{ ms}$	$^{\circ}\text{C/W}$	—	—	15
Power Dissipation in Free Air	$I_F = +100 \text{ mA}$	W	—	—	4
Power Dissipation	$I_F = +100 \text{ mA}$	W	—	—	10

Absolute Maximum Ratings¹ @ 25°C

Parameter	Absolute Maximum
RF CW Incident Power	50 dBm CW
Forward DC Current	+ 250 mA
Reverse DC Voltage @ -10 μA	- 150 V
Operating Temperature	-65°C to +125°C
Storage Temperature	-65°C to +150°C
Junction Temperature	+175°C Continuous
Mounting Temperature	+235°C for 10 seconds

1. Exceeding these limits may cause permanent damage.

Environmental Capability

MELF devices are appropriate for use in industrial and military applications and can be screened to meet the environmental requirements of MIL-STD-750, MIL-STD-202 as well as other military standards. The table below lists some of the MIL-STD 750 tests the device is designed to meet.


Test	Method	Description
High Temperature Storage	1031	+150°C, for 340 Hours
Temperature Shock	1051	-65°C to +150°C, 20 Cycles
HTRB	1038	80% of rated V_B , +150°C, for 96 Hours
Moisture Resistance	1021	No Initial Conditioning, 85% RH, +85°C
Gross Leak	1071 Cond. E	Dye Penetrant Visual
Vibration Fatigue	2046	20,000G's, 60Hz, x, y, z axis
Solderability	2026	Test Temperature = +245°C

2


MACOM Technology Solutions Inc. (MACOM) and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice. Visit www.macom.com for additional data sheets and product information.

Typical Electrical Performance @ +25°C


Series Resistance vs. Current

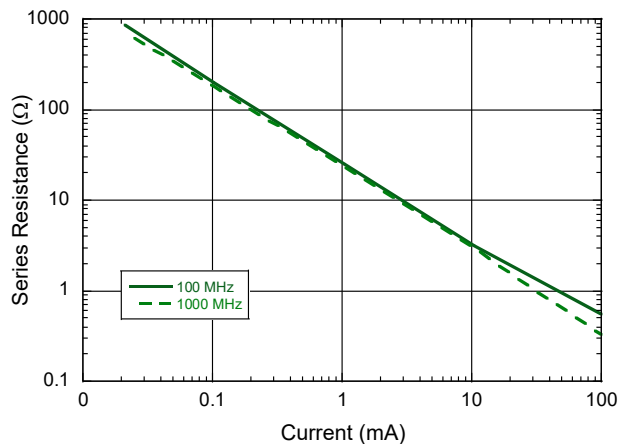


Parallel Resistance vs. Voltage

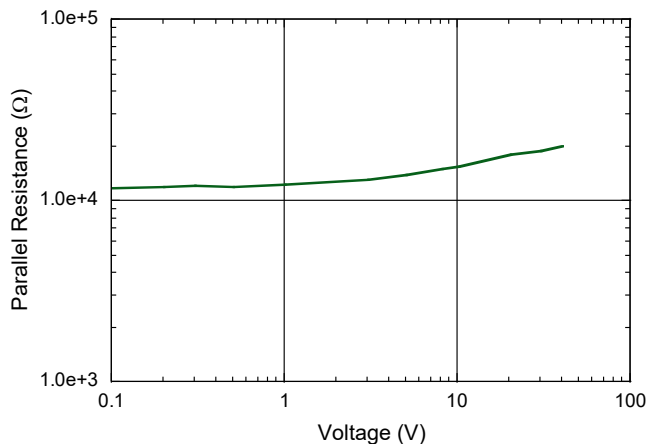

Total Capacitance vs. Voltage

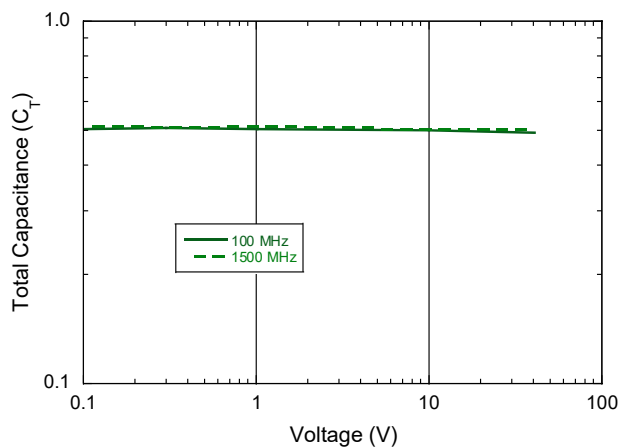


L_s (50 mA) vs. Frequency

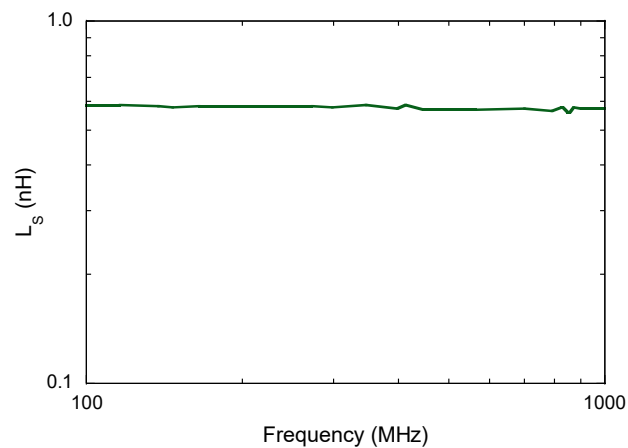

Typical Non-Magnetic Performance


Comparison of Magnetic Moment for MA4P7400F-1072T & MA4P7002F-1072T Magnetic Devices

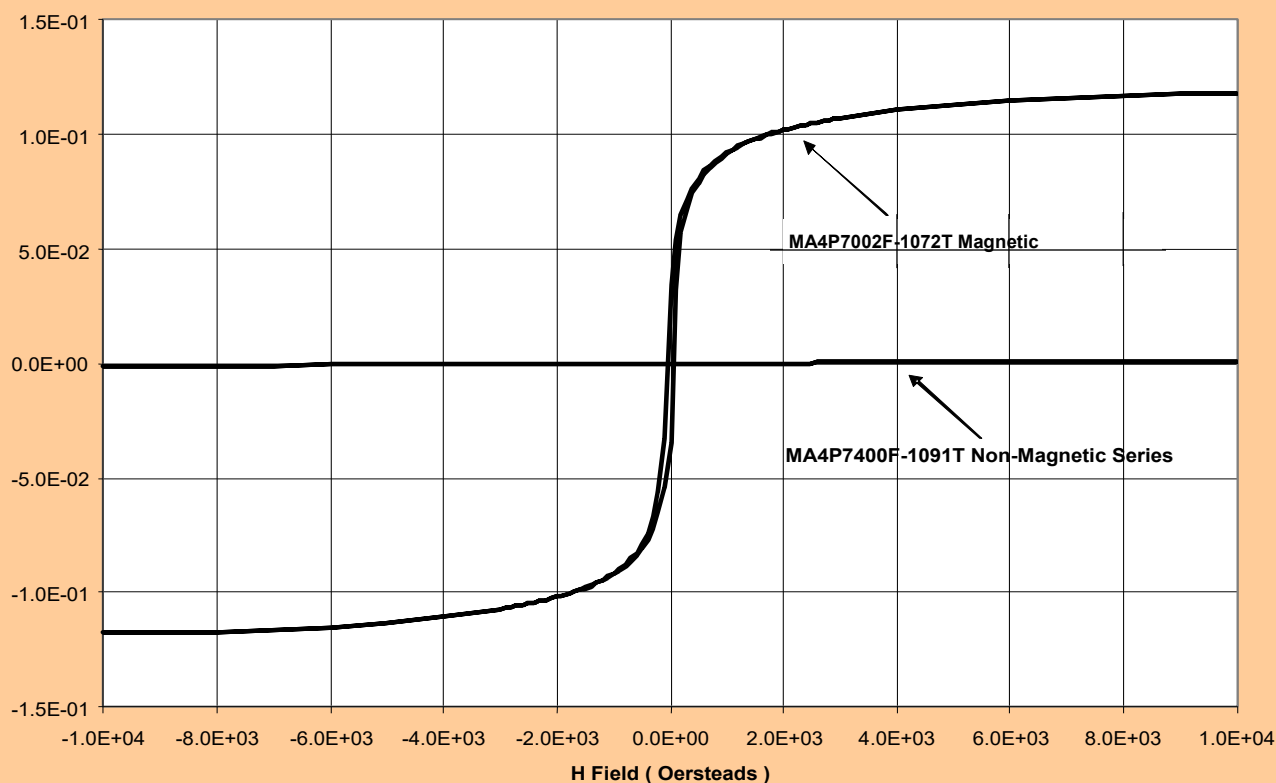


Typical Magnetic Properties of Non-Magnetic MA4P7452F-1072T Device vs. Conventional MA4P7002F-1072T Magnetic Device

Magnetic Property	MA4P7452F-1072T	MA4P7002F-1072T
Saturation Moment (EMU) @ H = H _{MAX} Oersteds	2.3 x E-4	2.1 x E-2
Remanance Moment (EMU) @ H = 0 Oersteds	4.2 x E-8	7.1 x E-3
Coercivity (Oersteds) @ EMU = 0 Moment	1.0	59.2

1072 MELF Surface Mount Package

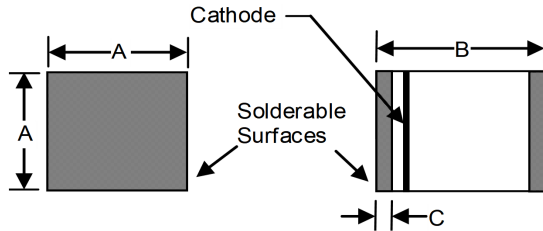

Circuit Pad Layout for 1072 MELF

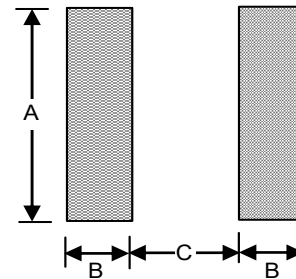

Dimension	inches		mm	
	Min.	Max.	Min.	Max.
A	0.080	0.095	2.032	2.413
B	0.115	0.135	2.921	3.429
C	0.008	0.030	0.203	0.762

1072 Package
(tape and reel only)
1500 pcs/reel

Dimension	Package Style 1072	
	inches	mm
A	0.093	2.36
B	0.050	1.27
C	0.060	1.52

MACOM Technology Solutions Inc. ("MACOM"). All rights reserved.

These materials are provided in connection with MACOM's products as a service to its customers and may be used for informational purposes only. Except as provided in its Terms and Conditions of Sale or any separate agreement, MACOM assumes no liability or responsibility whatsoever, including for (i) errors or omissions in these materials; (ii) failure to update these materials; or (iii) conflicts or incompatibilities arising from future changes to specifications and product descriptions, which MACOM may make at any time, without notice. These materials grant no license, express or implied, to any intellectual property rights.

THESE MATERIALS ARE PROVIDED "AS IS" WITH NO WARRANTY OR LIABILITY, EXPRESS OR IMPLIED, RELATING TO SALE AND/OR USE OF MACOM PRODUCTS INCLUDING FITNESS FOR A PARTICULAR PURPOSE, MERCHANTABILITY, INFRINGEMENT OF INTELLECTUAL PROPERTY RIGHT, ACCURACY OR COMPLETENESS, OR SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES WHICH MAY RESULT FROM USE OF THESE MATERIALS.

MACOM products are not intended for use in medical, lifesaving or life sustaining applications. MACOM customers using or selling MACOM products for use in such applications do so at their own risk and agree to fully indemnify MACOM for any damages resulting from such improper use or sale.