


## SlimFix X SFX 10/23 MC NE GE V2

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com



Similar to illustration

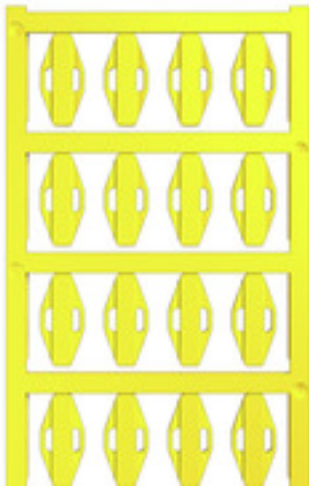

SlimFix X are halogen-free conductor and cable markers with a space-saving design. The markers can be fitted even after the conductor has been installed. SlimFix is an acknowledged and approved marker type in traffic engineering. The SF tool allows easy installation even in case of small markers.

- Halogen-free material
- Approved and accredited markers for traffic engineering applications, etc.
- Has to be fixed with cable ties if the conductor cross-section is larger than 16.0 mm<sup>2</sup>
- Markers in proven MultiCard format

**For custom printing:** Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.

### General ordering data

|                    |   |
|--------------------|---|
| Type               | SFX 10/23 MC NE GE V2   |
| Order No.          | <a href="#">1852360000</a>  |
| Version            | SlimFix X, Conductor and cable markers, 7 - 40 mm, 23 x 11 mm, Yellow |
| GTIN (EAN)         | 4032248385331   |
| Qty.               | 160 pc(s).  |
| compatible printer | <a href="#">1324380000</a>  |

**SlimFix X**  
**SFX 10/23 MC NE GE V2**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

**Technical data**
**Dimensions and weights**

|            |         |                 |            |
|------------|---------|-----------------|------------|
| Width      | 11 mm   | Width (inches)  | 0.433 inch |
| Height     | 23 mm   | Height (inches) | 0.906 inch |
| Depth      | 0.8 mm  | Depth (inches)  | 0.031 inch |
| Net weight | 0.606 g |                 |            |

**General data**

|  |         |                        |                              |
|--|---------|------------------------|------------------------------|
| Colour                                       | Yellow  | Material               | Polyamide 66                 |
| Material colour according to resistance code | 4       | Recommended industries | Transportation, Machinery    |
| Size of labelling field                      | 23x5 mm | Type of printing       | blank                        |
| UL 94 flammability rating                    | V-2     | Version                | Installation with cable ties |
| Width  | 11 mm   |                        |                              |

**Conductor and cable markers**

|                               |                    |                               |                     |
|-------------------------------|--------------------|-------------------------------|---------------------|
| Conductor O.D.                | 7 - 40 mm          | Conductor O.D., max.          | 40 mm               |
| Conductor O.D., min.          | 7 mm               | Conductor cross-section, max. | 500 mm <sup>2</sup> |
| Conductor cross-section, min. | 16 mm <sup>2</sup> | Halogen                       | No                  |

**Classifications**

|            |             |            |             |
|------------|-------------|------------|-------------|
| ETIM 3.0   | EC001530    | ETIM 4.0   | EC001530    |
| ETIM 5.0   | EC001530    | ETIM 6.0   | EC001530    |
| UNSPSC     | 44-12-17-08 | eClass 5.1 | 27-14-91-03 |
| eClass 6.2 | 27-40-04-01 | eClass 7.1 | 27-14-91-03 |
| eClass 8.1 | 27-14-91-03 | eClass 9.0 | 27-14-07-08 |
| eClass 9.1 | 27-40-04-01 |            |             |

**Approvals**

|      |         |
|------|---------|
| ROHS | Conform |
|------|---------|

**Downloads**

|                  |  |
|------------------|--|
| Engineering Data | <a href="#">EPLAN, WSCAD, Zuken E3.S</a>       |
| Engineering Data | <a href="#">STEP</a>                           |
| Software         | <a href="#">M-Print PRO configuration file</a> |

**Data sheet**

**SlimFix X**  
**SFX 10/23 MC NE GE V2**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 16  
D-32758 Detmold  
Germany  
Fon: +49 5231 14-0  
Fax: +49 5231 14-292083  
[www.weidmueller.com](http://www.weidmueller.com)

**Drawings**

