

Fiber optic - HS LC-H-D2/ R2XC10-2,54 - 2202319

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (http://phoenixcontact.com/download)

Light guides, passive, rigid, can be used for the ME, ME-MAX, ME-IO, ME PLC, and EH housing ranges (housing must be processed)



Your advantages

- ☑ Easy mounting on the PCB using press pins
- Resistance to ESD
- Housing processing available on request



Key Commercial Data

Packing unit	100 pc
Minimum order quantity	100 рс
GTIN	4 055626 050201
GTIN	4055626050201

Technical data

Product properties

Brief article description	Fiber optic
Туре	HS LC-H-D2/ R2XC10-2,54
Order No.	2202319
Туре	passive, rigid
Alignment	Horizontal
Number of displays	20 (2 rows x 10 columns)
ESD protection	< 8 kV
Head form	Round, conical

Dimensions

Caption	Details on positioning inside the electronics housing can be found in the download area under "Design-In"



Fiber optic - HS LC-H-D2/ R2XC10-2,54 - 2202319

Technical data


Dimensions

Pitch	2.54 mm
Diameter	2 mm
Hole diameter	1.2 mm
Material specifications	
Material	PC
Color (RAL)	transparent
	black
Ambient conditions	
Ambient temperature (operation)	-40 °C 85 °C
General information	
Type of note	Assembly instruction:
Note	Refer to the data sheet for the range in the download area.
	To prevent glare, the system has an aperture. This also makes mixed colors possible.
^D ackaging details	
Pieces per package	100
Denomination packing units	Pcs.
Standards and Regulations	
Flammability rating according to UL 94	НВ
Environmental Product Compliance	
China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Drawings



Fiber optic - HS LC-H-D2/ R2XC10-2,54 - 2202319

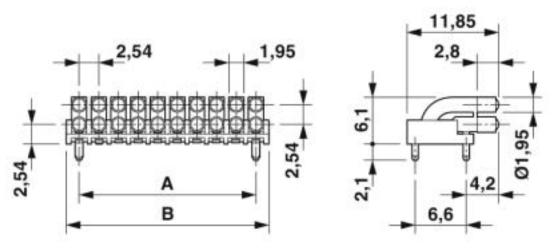

Dimensional drawing

Details on positioning inside the electronics housing can be found in the download area under "Design-In"

Approvals

Approvals

Approvals

EAC

Ex Approvals

Approval details

EAC EAC B.01742

Phoenix Contact 2019 © - all rights reserved http://www.phoenixcontact.com

PHOENIX CONTACT GmbH & Co. KG Flachsmarktstr. 8 32825 Blomberg Germany Tel. +49 5235 300 Fax +49 5235 3 41200 http://www.phoenixcontact.com