


IMPEDANCE (Z)			
Frequency	25 MHz	100 MHz	300 MHz
Nominal (REF)	91 Ω	193 Ω	419 Ω
Minimum	- Ω	154 Ω	- Ω

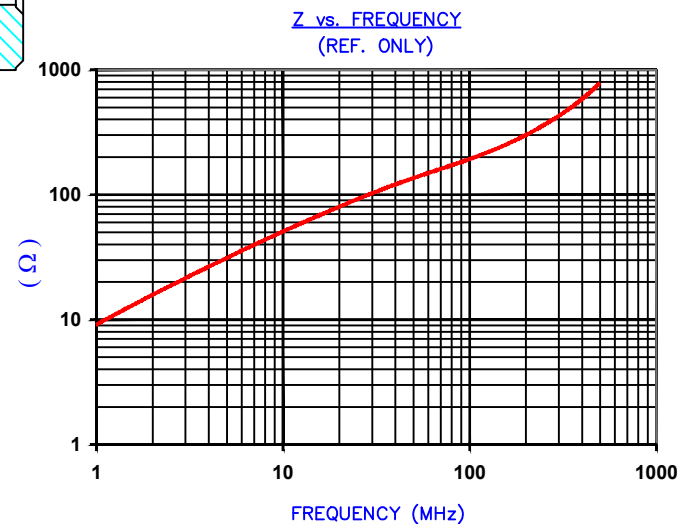


AGILENT E4991A Impedance/Material Analyzer
HP 16092A-Test Fixture TEST REF. 6158

FERRITE CORE DIMENSIONS (SPEC): mm [in]

A	13.90 [.547]	+ 0.20 [.008]
B	9.40 [.370]	+ 0.20 [.008]
C	18.00 [.709]	+ 0.40 [.016]
D	5.30 [.209]	+ 0.20 [.008]
E	0.80 [.0315]	+ 0.20 [.008]

WEIGHT/1000 5.80 kgs [12.79 Lbs]

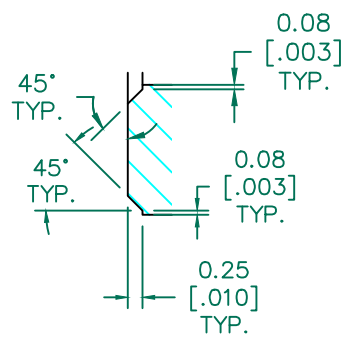

DETAIL "A"
CHAMFER
SCALE=8:1

NOTES: UNLESS OTHERWISE SPECIFIED

1. COSMETIC SPECIFICATION REFER TO WI-QA-038.

SCALE DRAWING 1:1

28R0546-000



DIMENSIONS ARE IN mm[INCHES].				This print is the property of Laird Tech. and is loaned in confidence subject to return upon request and with the understanding that no copies shall be made without the written consent of Laird Tech. All rights to design or invention are reserved.		Laird					
PROJECT/PART NUMBER:				28R0546-000		REV	B	PART TYPE:	FERRITE RIBBON CORE	DRAWN BY:	JRK
B	UPDATE LOGO	08/29/16	QIU	DATE:	08/31/07	SCALE:	4 : 1	MATERIAL:	Ferrite		
A	ORIGINAL DRAFT	08/31/07	JRK	CAD #	28R0546-000-B		TOOL #	R0546			
REV	DESCRIPTION	DATE	INT								