

**Mounting Option** 

03-.116 (2.95) I.D. Floating Eyelets


## **Contact Detail**

542-Wire Wrap .025 Sq.(0.64 Sq.) - Tail LG=.645(16.38) .156 [3.96] Contact Spacing x .200 [5.08] Row Spacing

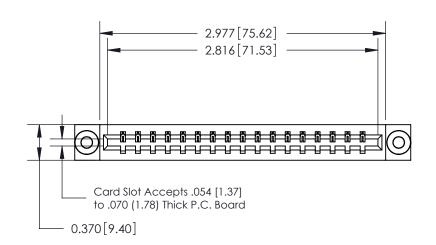

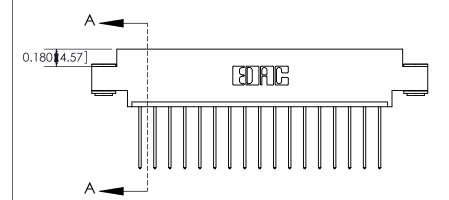



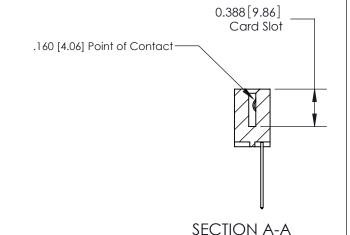

## **See Accompanying Page for:**

- **Bend Detail**
- **Mounting Options**
- **Features and Specifications**

333 Series Card Edge Connector Part Number: 333-017-542-603



	ACAD REFERENCE NO. 333 ENG MASTER		
	DRAWN: J.LEE	DATE: OCT. 14/09	
	CHECKED:	DATE:	
	SCALE: NTS	SHEET 1 OF 4	
)	DRAWING NUMBER	ISSUE	

333 Assembly

THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.

1



333 Series Card Edge Conn	ACAD REFERENCE NO. 333 ENG MASTER			
Contact Bend Detail	DRAWN: J.LEE	DATE: OCT. 14/09		
Corridor bend Dendii		CHECKED:	DATE:	
EDAC INC			SHEET :	2 OF 4
	TORONTO, ONTARIO CANADA  OUR CONNECTION TO QUALITY & SERVICE  TORONTO, ONTARIO CANADA  ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWING NUMBER	•	ISSUE
		333 Assembly		1

THIS IS A C.A.D. GENERATED DRAWING
DO NOT MAKE MANUAL REVISIONS TO MASTER



SOL NUMBER

DRIGINAL

1



	333 Series Card Edge Connector			ACAD REFERENCE NO. 333 ENG MASTER			
	Mounting Options		DRAWN:	J.LEE	DATE: O	CT. 14/09	
			CHECKED:		DATE:		
		THESE DRAWINGS AND SPECIFICATIONS	SCALE:	NTS	SHEET :	3 OF 4	
	TORONTO, ONTARIO ARE THE PROPERTY OF EDAC INC., AND SHALL NOT BE REPRODUCED, OR COPIE	DRAWING	NUMBER		ISSUE		
MANUFACTURE OR SALE C		MANUFACTURE OR SALE OF APPARATUS	3	33 Assembly		1	

ISSUE NUMBER

ORIGINAL



## **Features**

- .156 (3.96) Contact Spacing x .200 (5.08) Row Spacing
- Accepts .062 (1.57) Nominal Thickness P.C. Board
- High Profile Insulator Body .600 (15.24)
- Contact Termination Options include P.C. Tail, Wire Hole, Wire Wrap, 90 Degree, & Extender Board Bends
- Single or Dual Row Configurations
- Variety of Mounting Options, Flush or Offset Lugs
- Accepts Between Contact and In-Contact Polarizing Keys

## **Specifications**

- Insulator Material: Thermoplastic Polyester, UL 94V-0, Colour: Green
- Contact Material: Copper, Nickel, Tin Alloy CA-725
- Contact Plating: Gold on the Mating Area, Tin on the Contact Tails, Nickel Underplate
- Current Rating: 3 Amperes Continuous
- Contact Resistance: 10 Milliohms Maximum
- Dielectric Withstanding Voltage: 1800 V AC rms at Sea Level Between Adjacent Contacts
- Insulation Resistance: 5000 Megohms Minimum
- Operating Temperature: -65 to +105 Degrees C
- Insertion Force: 16 oz (4.45 N) Maximum per Contact Pair when Tested with a .070 (1.78) Thick Gauge
- Withdrawal Force: 1 oz (0.28 N) Minimum per Contact Pair when Tested with a .054 (1.37) Thick Gauge

333 Series Card Edge Connector	ACAD REFERENCE NO. 333 ENG MASTER
Features and Specifications	DRAWN: J.LEE DATE: OCT. 14/09
redictes and specifications	CHECKED: DATE:
	RAWINGS AND SPECIFICATIONS SCALE: NTS SHEET 4 OF 4
TORONTO, ONTARIO SHALL N	OT BE REPRODUCED,OR COPIED DRAWING NUMBER ISSUE
	TURE OR SALE OF APPARATUS 333 Accombly