
	L	69.30 ±0.38		
±0.38		63.50 ±0.25		
36.36	48	55.42		
2 8	N			
1	-(			
<u>.                                    </u>	<del>-</del>	2.77		




TOLER INLESS OT SPECI	HERWISE	THIS IS A C.A.D. G DO NOT MAKE MA
.X	±0.25	
.XX	±0.13	


.XXX ±0.10

GENERATED DRAWING ANUAL REVISIONS TO MASTER.

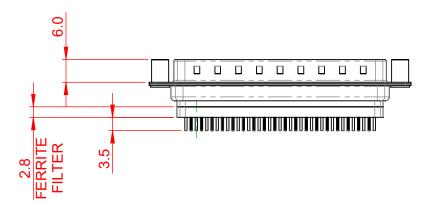

ISSUE NUMBER ORIGINAL





## NOTES:

MATERIAL:

HOUSING: THERMOPLASTIC POLYESTER, UL94V-0

SHELL: STEEL, TIN PLATED

CONTACT: COPPER ALLOY, GOLD FLASH PLATED

OPERATING TEMPERATURE: -55°C to +105°C

**CURRENT RATING: 3A PER CONTACT** CONTACT RESISTANCE: 25mΩ MAX. INSULATOR RESISTANCE: 5000MΩ min.

**DIELECTRIC** 

WITHSTANDING VOLTAGE: 1000V AC rms

## THIS SERIES FULLY CONFORMS TO EDAC INC



TORONTO, ONTARIO CANADA

627 SERIES D-SUB CONNECTOR

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC..AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

SW REFERENCE NO.: 627 ASSEMBLY				
DRAWN: C.B	DATE: AUG. 01/2018			
CHECKED:	DATE:			
SCALE: 1:1	SHEET 1 OF 1			
DDAMING NUMBER: 627 027 229 269				

DRAWING NUMBER: 627-037-228-268 ISSUE PART NUMBER: 627-037-228-268