


Data sheet | Item number: 756-5502/030-010




Sensor/Actuator cable; M12A socket; straight; M8 plug; angled; 3-pole;
Length: 1 m



www.wago.com/756-5502/030-010

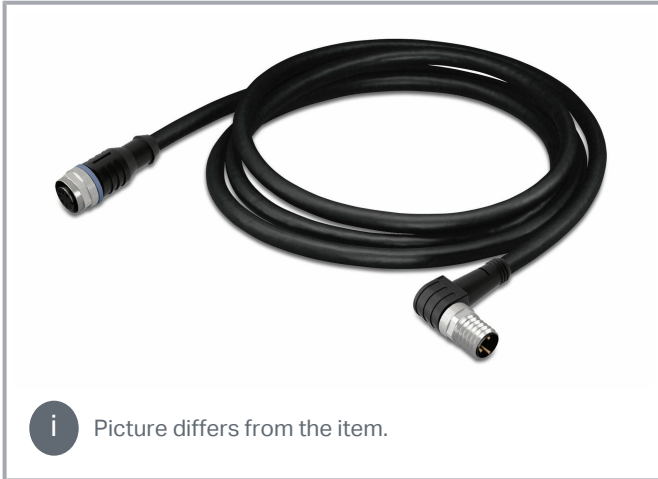

 Picture differs from the item.

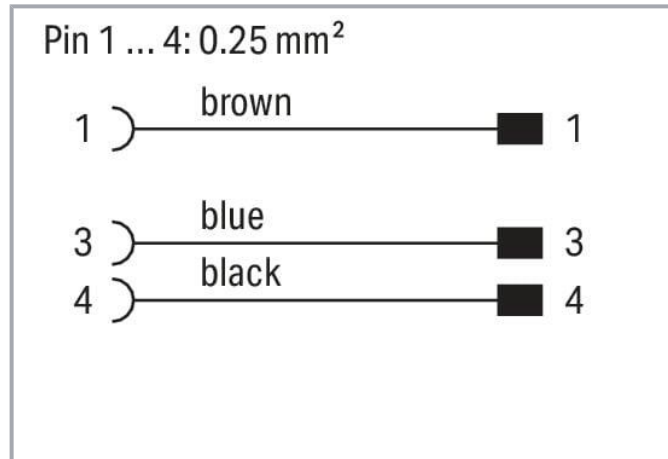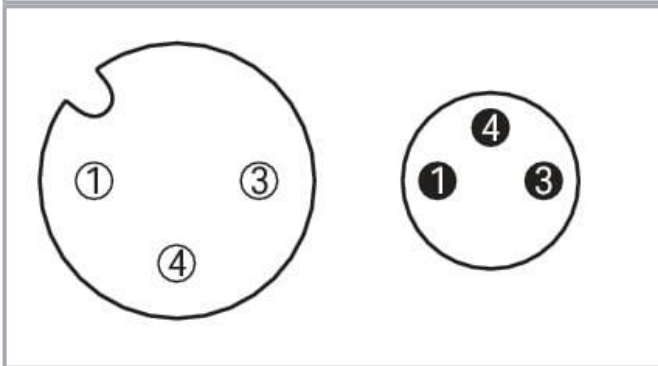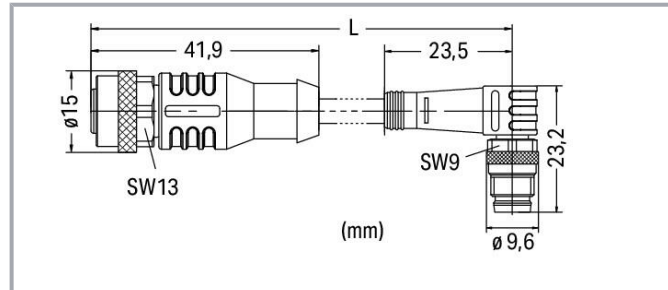

Item description

Short description:

- PUR, halogen-free
- Suitable for drag chains
- Good resistance to microbes, hydrolysis, oil, chemicals and UV radiation.
- Good chemical resistance.
- Cable used: UL listed

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.

Data

Technical data

General

Operating voltage	AC/DC 60 V
Operating current	4 A
Rated surge voltage	1.5 kV
Contact resistance	10 mΩ
Conductor resistance	≤ 60 Ω/km
Pollution degree	3 per VDE 0110
Protection type	IP67
Ambient (operating) temperature (static)	-50 ... +90 °C
Ambient (operating) temperature (dynamic)	-25 ... +90 °C

Suitable for drag chains

Bending radius	10 x cable diameter (min.)
Bending cycles	2 Mio.
Acceleration (min.)	5
Travel speed (max.)	3.33
Travel path (horizontal) max.	5
Travel path (vertical) max.	2
Torsional capacity	180

Cable

Cable length	1 m
Type code	LiF9YH-11YH or LiF9YC11YFHF
Conductor configuration	Bare copper wire, fine-stranded (42 x 0.1 mm)
Conductor insulation	PP9Y (halogen-free)
Sheath material	Polyurethane (PUR), halogen-free per DIN VDE 0472 Part 815, flame resistant per IEC 332-2, self-extinguishing
Sheathed cable color	black
Sheathed cable diameter	3.9 ... 4.3 mm

Connector

Connection type	M12 Socket - M8 plug
Cable connection direction to mating direction	0 °
Cable connection direction to mating direction (2)	90 °

Subject to changes. Please also observe the further product documentation!



Connector interface coding (cable/adapter) 1 1	A-coded
Housing material	Polyurethane (PUR)
Contact material	CuSn
Tightening torque	0.6 ... 1 Nm

Commercial data

eCl@ss 10.0	27-06-03-11
eCl@ss 9.0	27-06-03-11
ETIM 8.0	EC001855
ETIM 7.0	EC001855
PU (SPU)	10 (1) pcs
Packaging type	Box
Country of origin	DE
GTIN	4044918974769
Customs tariff number	85444290900

Environmental Product Compliance

CAS-No.	7439-92-1
REACH Candidate List Substance	Lead
RoHS Compliance Status	Compliant, With Exemption
RoHS Exemption	6(c)
SCIP notification number (Austria)	571f2937-1635-4ef8-9388-2777db7a0628
SCIP notification number (Belgium)	70e1dbdf-3593-4e0b-bb29-e24220808ab7
SCIP notification number (Bulgaria)	c44f51a8-fe11-42c1-9536-de5c6bfe17b4
SCIP notification number (Czech Republic)	354e03ec-1eb0-4494-8fd7-7271926e780f
SCIP notification number (Denmark)	2b97e565-3b79-4425-8101-a0ccf7288bf4
SCIP notification number (Finland)	ce89dc46-42ec-452a-95b6-7f47710419d8
SCIP notification number (France)	85f9191b-8fe3-424d-8d73-6b8fc38e6117
SCIP notification number (Germany)	cc7b86fa-5745-4a2b-8047-8b61c9f1e3c8
SCIP notification number (Hungary)	bceab832-812a-4297-9df6-b3820b17624b
SCIP notification number (Italy)	ee5ed388-e506-4b10-ae62-ce34b6bfb92
SCIP notification number (Netherlands)	6dade569-cb22-407b-bcf3-bbf471ffebf2
SCIP notification number (Poland)	85cf7bc4-025b-4c76-a341-0add37e61c92
SCIP notification number (Romania)	40224392-ec41-452f-bfe8-dafebec7bba6
SCIP notification number (Sweden)	3e32b527-2592-424c-be56-8b8cbe7f372d

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
 Hansastr. 27
 32423 Minden
 Phone: +49571 887-0 | Fax: +49571 887-169
 Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
 We are always happy to take your call at +49 (571) 887-44222.



Downloads Documentation

Bid Text

756-5502/030-010 X81 - Datei	2019 Feb 19	xml 3.3 kB	Download
---------------------------------	-------------	---------------	----------

756-5502/030-010 doc - Datei	2017 Sep 20	doc 26.6 kB	Download
---------------------------------	-------------	----------------	----------

System Description

IP67 Cables and Pluggable Connectors		pdf 161.6 kB	Download
--------------------------------------	--	-----------------	----------

CAD/CAE-Data

CAE data

WSCAD Universe 756-5502/030-010		URL	Download
---------------------------------	--	-----	----------

WSCAD Universe 756-5502/030-010		URL	Download
---------------------------------	--	-----	----------

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 756-5502/030-010 Sensor/Actuator cable; M12A socket; straight; M8 plug; angled; 3-pole; Length: 1 m		URL	Download
---	--	-----	----------

Installation Notes

Subject to changes. Please also observe the further product documentation!