


	Ŧ	۵	нт. П	m n	D	C C

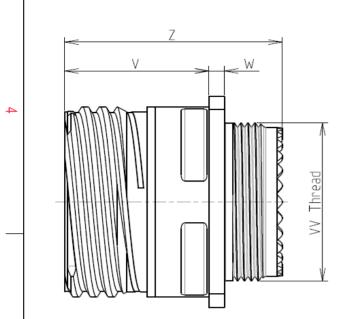

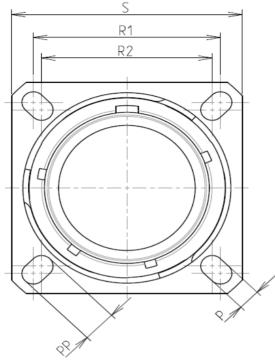



Keying Shov

CHARACTERISTICS

-Salt Spray

BASIC SERIES:

SHELL SIZE : 21

PLATING : S = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

ω

 \mathbf{N}

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material : Stainless Steel : Nickel -Shell Plating : Thermoplastic -Insulator -Contacts : Copper Alloy : Silicon Elastomer -Seals & Grommet : Gold over copper Alloy $0.8 \mu m$ minimum -Contact Plating -Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessories -Temperature Range : -65°C to +200°C

: 500 hours

8D 0

G

21

-

S

77

S

F

m	D	0	σ	A	
S R1 R2					4
g Shown as example		LAYOUT SHO	WN AS EXAMPLE		3
Connector dimension Dim Nominal P 3.25±0.2 PP 4.93±0.2 R1 31.75 R2 29.36 S 39.7±0.3 V 20.07+0/-1.25 W 2.1/3.2 Z 31.5 Max VV THREAD M31x1-6g	SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.) <u>Country</u> Jurisdiction & Control List <u>FR</u> Not Listed PN: 8D021S77SC				
	ISS DATE Designed By:	First Release Latest modification - by Date:		CUSTOMER DRAWING	MOD N°
C	SCALE -	Genera Tolera	ess Steel Recepta al linear ances: :	CIE 8D SERIES NPRDS / PROJECT 859 This document is the pro	uperty of
ORIENTATION : C CONTACT TYPE : SOCKET(500 Matings)	SOURIAU WWW.SOURIAU.COM it mus		it must not be reprodu communicated without p	ced or ermission	
		SOURIAU DRG N° 8D021S77SC-C C B A			SHEET

	Ŧ	۵	г	m		0
		Contact Layout				Panel Cutou
4	(77 • • •				SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
		17#22D 2#8 Triax				
_	[21-77			<u>v</u>	
	Ctc	X Y	,			ØA_
	A	1.96 8.3	38			
	В	5.46 7.6	57			
	С	8.51 5.7				Dim ØA
ω	D	10.46 2.8				ØAA
	E F	10.46 -2.3 8.51 -5.7				R1 ØT
	G	5.46 -7.0				L
	н	1.96 -8.				
	J	0 -5.4	41			
	K	-1.96 -8.				SOURIAU shall not be liable for any
	L	-5.46 -7.				due to a use of the Products wh
	M	-8.51 -5. -10.46 -2.				the Specifications issued by either of (professional recommendati
	P	-10.46 -2.8				(professional recommendation
N	R	-8.51 5.7				Country
	S	-5.46 7.6				FR
	Т	-1.96 8.3	38			PN: 8D0219
	U	-4.57 0				1
	V	4.57 0)		A 03-11-20	016 First Release
_					ISS DATE Designed By:	Latest modification - by Date:
					TITLE	Stainless Ste
					SCALE NA	General linear Tolerances:
					SOURIA	U WWW.SOURIAU.C
					FORMAT A3	SOURIAU 8D021S7
	Н	G	F	E	D	С

