
<u>т</u>	יד Q	m		0	σ	A	
	N Thread						
↔ CHARACTERISTICS	Key	ring Shown as example		LAYOUT SHOWN	AS EXAMPLE		
-Standard : Based on MIL-DTL-38999 S -Shell Material : Composite -Shell Plating : Olive drab C -Insulator : Thermoplast -Contacts : Copper Alloy -Seals & Grommet : Silicon Elaste	admium ic	DimNominalØS29.4 MaxZ'31.5 MaxVV THREADM18x1-6g		the Specifications issued by eit (professional recomm	cts which does not comply wi	th d party control List	-
-Durability : 500 Mating -Durability : 500 Mating -Delivered with Souriau contacts and A -Temperature Range : -65°C to +17 -Salt Spray : 2000 hours	cycles Accessories		A 17-10-2016	1	13J98SN		
			ISS DATE Designed By:	Latest modification - by Date:	CUST	MOD N°	1°
			TITLE		mposite Plug 8D seri		
BASIC SERIES:	8D 5 - 13 J 98 S	5 N	SCALE -	General lin Toleranc ±	25:	RDS / PROJECT 859	
CONTACT TYPE : Standard Crimp Co SHELL SIZE : 13	ntact	ORIE CONTACT TYPE : SOCKET(	SOURIAU	WWW.SOURIA	U.COM	his document is the property of SOURIAU it must not be reproduced or mmunicated without permission	
PLATING : J = Olive drab Cadr	nium	CONTACT LA	YOUT : 13-98 FORMAT A3		AU DRG N° .3J98SN-C	SHEET 1/2	
н	G F	E	D	C	В	Α	

_	т	۵	п –	т	D	0
		Contact Layout				
4		$ \begin{array}{c} & & & \\ & & & \\ & & & \\ & & & \\ & & & \\ & & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ & \\ & & \\ $				
	Positi 	Contacts    Location    tact (mm)  Contacts    A * 0.00 (0.00)  * 1.98 (4.90)    A  +.000 (0.00)  +.195 (4.95)    B  +.125 (3.18)  +.150 (3.81)    C  +.139 (4.90)  +.030 (0.76)    D 164 (4.17) 105 (2.67)    E  +.000 (0.00) 133 (3.43)    F 164 (4.17) 105 (2.67)    G 193 (4.90)  +.030 (0.76)    H 125 (3.18)  +.150 (3.81)    J  +.065 (1.65) 015 (0.38)    K 065 (1.65) 015 (0.38)				
ယ	Shell  Arrangement    Size  no.    13  -98	Number of contacts  Size contacts  Service rating  Contact location  Supersedes    10  20  I  All  MS20051-98				
	1					
						SOURIAU shall not be liable for ar due to a use of the Products w the Specifications issued by either o (professional recommenda
N						Count FR
					A 17-10-20	PN: 8D513
					ISS DATE Designed By:	Latest modification - by Date:
					TITLE	Compo
<u> </u>					SCALE NA	General linear Tolerances: ±
					SOURIA	WWW.SOURIAU.
					FORMAT A3	SOURIAU 8D513J
L	Н	G	F	E	D	C

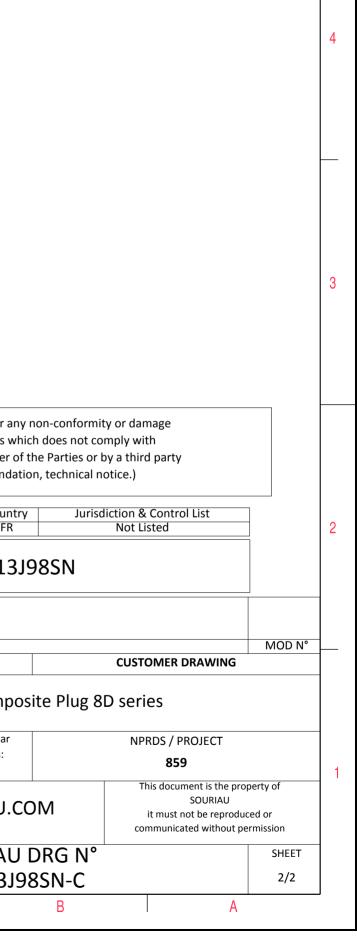

ω