
т	۵	н п	m	D	C C





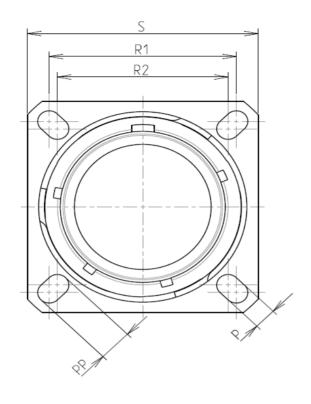

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

ယ

 \sim

-Mass

BASIC SERIES:

SHELL SIZE : 13

SHELL TYPE : Square Flange Receptacle

PLATING : Z = Black Zinc Nickel

Н

CONTACT TYPE : Standard Crimp Contact

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Aluminium		
-Shell Plating	: Black Zinc Nickel		
-Insulator	: Thermoplastic		
-Contacts	: Copper Alloy		
-Seals & Grommet	: Silicon Elastomer		
-Contact Plating	: Gold over copper Alloy 0.8µm minimum		
-Durability	: 500 Mating cycles		
-Delivered with Souria	u contacts and Accessories		
-Temperature Range	: -65°C to +175°C		
-Salt Spray	: 500 hours		

: 15.89 g ± 10%

8D 0

G

13

Ζ

35

А


F

А

Connector dimension				
Dim	Nominal			
Р	3.25±0.2			
РР	4.93±0.2			
R1	23.01			
R2	20.62			
S	28.6±0.3			
V	20.83+0/-1.25			
W	2.1/2.5			
Z	31.5 Max			
VV THREAD	M18x1-6g			

Е

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recomment Cour

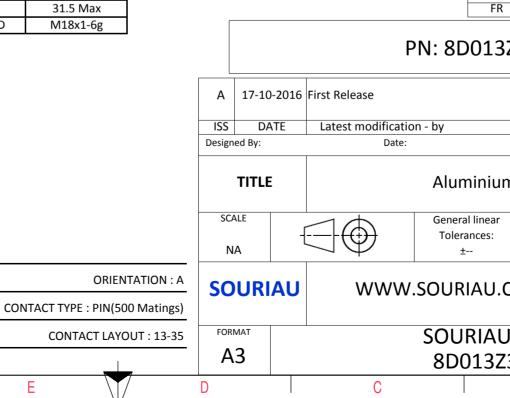

	Φ		A				
					4		
AS EXA	AMPLE				3		
r any non-conformity or damage s which does not comply with er of the Parties or by a third party ndation, technical notice.)							
untry FR	/ Jurisdiction & Control List Not Listed						
3Z35AA							
		CUSTOME	R DRAWING	MOD N°			
um	um Receptacle 8D series						
ar :	NPRDS / PROJECT						
J.CC	.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission						
	DRG N°			SHEET			
Z3	5AA-C	I	•	1/2	J		
	В		A				

