
т (Останование) Положите Положит Положите Положите Пол	<b>m</b>		0	œ	A	
Z'						
Keyir	ng Shown as example		LAYOUT SHOWN	AS EXAMPLE		
CHARACTERISTICS	Connector dimension Dim Nominal					
<ul> <li>-Standard : Based on MIL-DTL-38999 Series III</li> <li>-Shell Material : Composite</li> <li>-Shell Plating : Nickel</li> <li>-Insulator : Thermoplastic</li> <li>-Contacts : Copper Alloy</li> <li>-Seals &amp; Grommet : Silicon Elastomer</li> <li>-Contact Plating : Gold over copper Alloy 0.8μm minimum</li> </ul>	ØS 29.4 Max Z' 31.5 Max VV THREAD M18x1-6g		SOURIAU shall not be liable for any non-conformity or damage         due to a use of the Products which does not comply with         the Specifications issued by either of the Parties or by a third party         (professional recommendation, technical notice.)         Country       Jurisdiction & Control List         FR       Not Listed			
-Durability : 500 Mating cycles		PN: 8D513M04SA				
-Delivered with Souriau contacts and Accessories -Temperature Range <u>-65°C to +200°C</u>						
-Salt Spray : 2000 hours		A 18-10-2016	5 First Release			
Mass : 20.9 g ± 10%		ISS DATE Designed By:	Latest modification - by Date:	CUSTO	MC MER DRAWING	OD N°
		TITLE Composite F		nposite Plug 8D serie	Plug 8D series	
BASIC SERIES:     8D     5     -     13     M     04     S       SHELL TYPE     : Plug with RFI Shielding     -     13     M     04     S	A	SCALE	General line Tolerance		DS / PROJECT 859	
CONTACT TYPE : Standard Crimp Contact SHELL SIZE : 13	SOURIAU         This document is the property of SOURIAU it must not be reproduced or computated without paramission					
PLATING : M = Nickel	CONTACT TYPE : SOCKET(500 Matings) CONTACT LAYOUT : 13-04	FORMAT	communicated without permission			
	CONTACT LATOUT . 15-04	A3		SM04SA-C		1/2
	1					

	<u>_</u>	۵	г П	m		0
		Contact Layout				
4		$-X \begin{pmatrix} & & & \\ & &$				
	posit	Contacts (Insert arrangement 13-4) Location           Location           ntact         X-axis         Y-axis (mm)         Y-axis           A         +.000 (0.00)         +.150 (3.81)         B         +.146 (3.71)         +.035 (0.89)           B         +.146 (3.71)         +.035 (0.89)         C         +.000 (0.00)        083 (2.11)           D        146 (3.71)         +.035 (0.89)         Service         Contacts         Supersedes           contacts         contacts         rating         location         Location           4         16         I         All         MS20051-4				
ى						
						SOURIAU shall not be liable for an due to a use of the Products wh the Specifications issued by either o (professional recommendat
2						Countr FR
						PN: 8D513N
						116 First Release
					ISS DATE Designed By:	Latest modification - by Date:
					TITLE	Compo
_					SCALE NA	General linear Tolerances:
					SOURIA	U WWW.SOURIAU.C
					FORMAT	SOURIAU
			-	- 1	A3	8D513M
	Н	G	F F	E	D	C

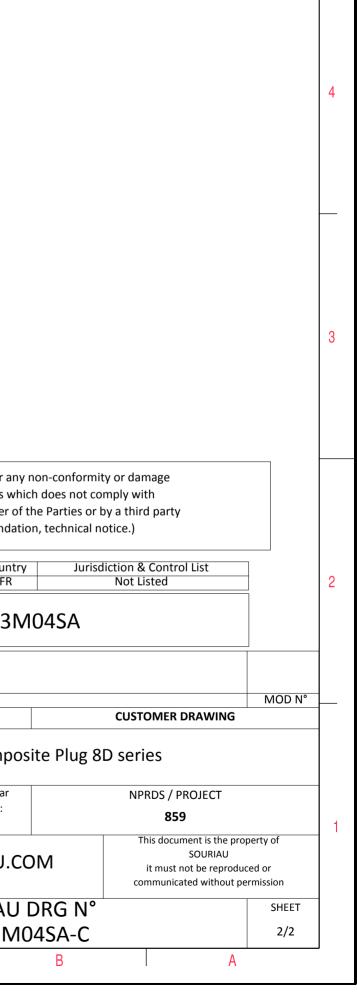

 $\triangleright$ 

σ