



JUMPER P/N	OVERALL LENGTH, L (m)
1060292001	1.0 +0.2/-0
1060292002	2.0 +0.2/-0
1060292003	3.0 +0.2/-0
1060292004	4.0 +0.2/-0
1060292005	5.0 +0.2/-0
1060292006	6.0 +0.2/-0
1060292007	7.0 +0.2/-0
1060292008	8.0 +0.2/-0
1060292009	9.0 +0.2/-0
1060292010	10.0 +0.2/-0
1060292015	15.0 +0.2/-0
1060292020	20.0 +0.2/-0
1060292025	25.0 +0.2/-0
1060292030	30.0 +0.3/-0
1060292040	40.0 +0.4/-0
1060292050	50.0 +0.5/-0


CONNECTIONS	
FROM	TO
P1-A	P2-B
P1-B	P2-A

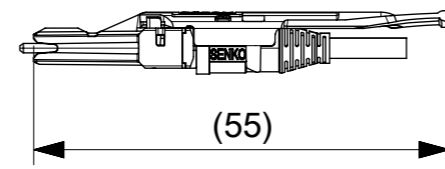

VIEW C



VIEW D

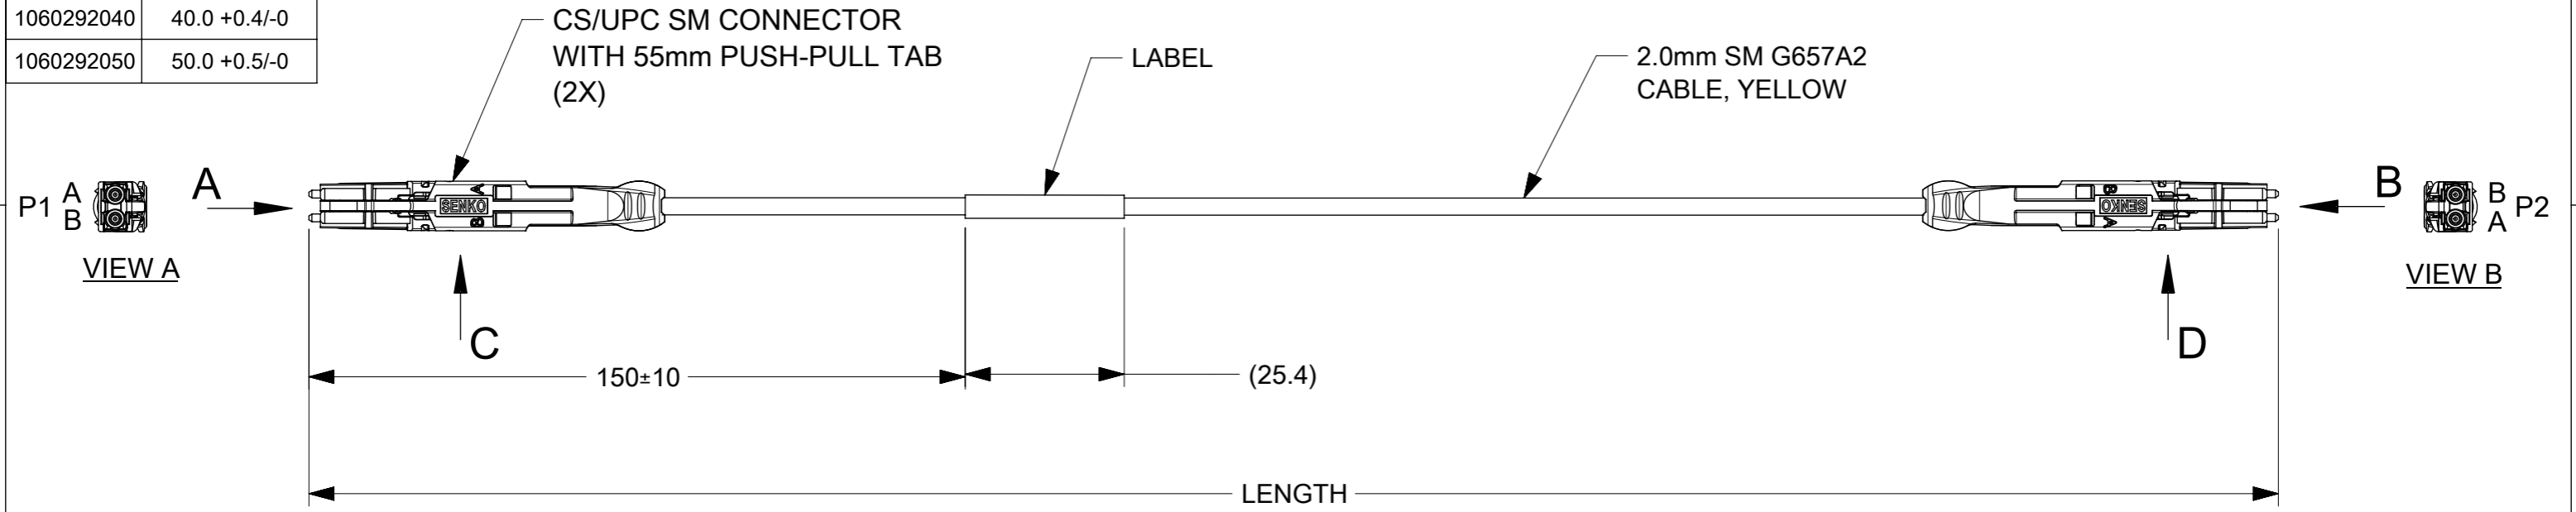

NOTES:

- DUST CAP IS INCLUDED BUT NOT SHOWN.
- OPTICAL LOSS AS PER CONNECTOR @1310nm  
 INSERTION LOSS :  $\leq 0.35\text{dB}$   
 RETURN LOSS :  $\geq 50\text{dB}$
- LABEL CONTENT: MOLEX P/N AND SERIAL NUMBER.
- CABLE MINIMUM BEND RADIUS  
 DYNAMIC 60MM  
 STATIC 30MM

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									
DIMENSION UNITS		SCALE		CURRENT REV DESC:					
mm		NTS							
GENERAL TOLERANCES (UNLESS SPECIFIED)				EC NO: 697293				<b>CS-CS UPC 2.0MM SM JUMPER WITH 55MM PUSH-PULL TAB</b>	
ANGULAR TOL ± °				DRWN: JHUANG18 2022/02/25					
4 PLACES ±				CHK'D: IGUMIN 2022/02/28					
3 PLACES ±				APPR: IGUMIN 2022/02/28					
2 PLACES ±				INITIAL REVISION:				DOCUMENT NUMBER	
1 PLACE ±				DRWN: SDXIE 2018/10/19				1060292001	
0 PLACES ±				APPR: IGUMIN 2018/10/30				DOC TYPE DOC PART REVISION	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				THIRD ANGLE PROJECTION		DRAWING		SERIES	
						A3-SIZE		106029	
				MATERIAL NUMBER		CUSTOMER		SHEET NUMBER	
				SEE TABLE				1 OF 1	