


# LINOS F-Theta-Ronar Lens


$f = 163\text{mm}$ , 1030-1080nm, fused silica, low absorption

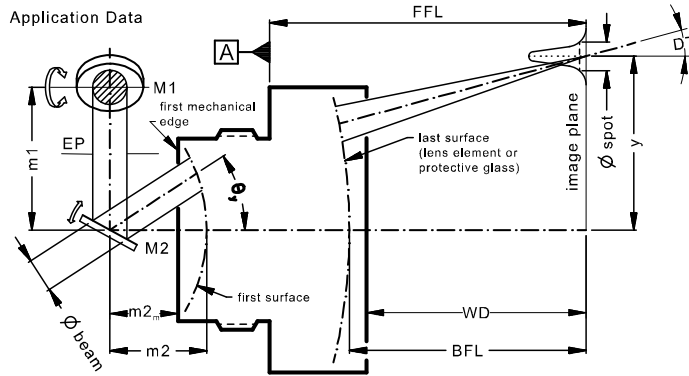

Part number	4401-589-000-26			
Design wavelength	$\lambda$	(nm)	1064	
Effective focal length	EFL	(mm)	163.3	
Back focal length	BFL	(mm)	221.1	
Working distance	WD	(mm)	219.3	
Flange focal length	FFL	(mm)	292.0	
Beam diameter $1/e^2$ truncated	$\varnothing_{\text{beam}}$	(mm)	14.0	20.0
Recommended mirror distance m1	m1	(mm)	17.0	25.6
Recommended mirror distance m2	m2	(mm)	22.5	28.5
Recommended mirror distance $m2_{\text{mechanical}}$	$m2_m$	(mm)	20.0	26.0
Scan angle	$\pm\theta_{x,y}$	( $^\circ$ )	15.2	11.7
Scan area (edge length of scan field)	$2x * 2y$	( $\text{mm}^2$ )	85 x 85	66 x 66
Spot diameter	$\varnothing_{\text{spot}}$	( $\mu\text{m}$ )	23	16
Telecentric error (maximum deviation)	DT	( $^\circ$ )	4.9	3.0
Total transmission @ 1030 - 1080nm	T	(%)	> 96	
Group delay dispersion at $\lambda$	GDD	( $\text{fs}^2$ )	1052	
LIDT coating @ 1064nm, 12ns, 100Hz		( $\text{J}/\text{cm}^2$ )	40	
LIDT coating @ 1030nm, 291fs, 5kHz		( $\text{J}/\text{cm}^2$ )	0.9	
Focused back reflex positions from first surface		(mm)	14.7; 15.2; 199.7	
Weight		(g)	1427	
Protective glass	PG		4401-499-005-00	

Optical parameters calculated for a 1-mirror system  
 Subject to technical change


**Mechanical drawing**

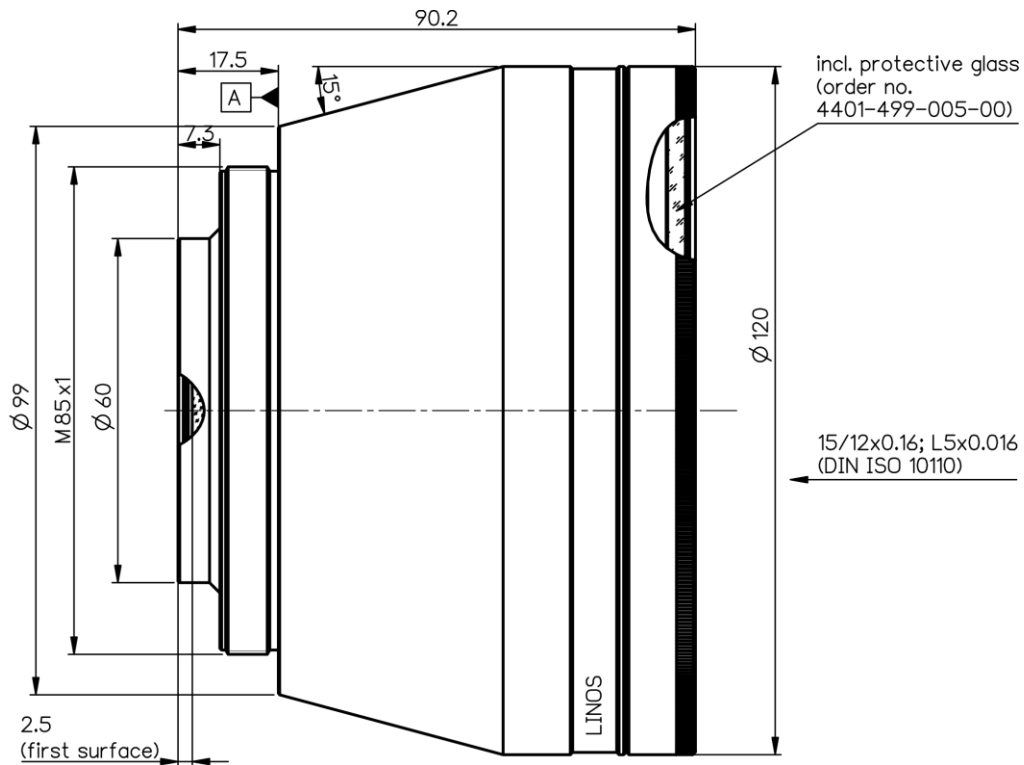

Dimensions without tolerances are nominal values and illustration not to scale

**Spot variation over scanfield**

Spot radius in  $\mu\text{m}$  at  $1/e^2$  level for a Gaussian laser beam ( $M^2=1$ ) field size and mirror distances as given above for a 2 mirror scan system

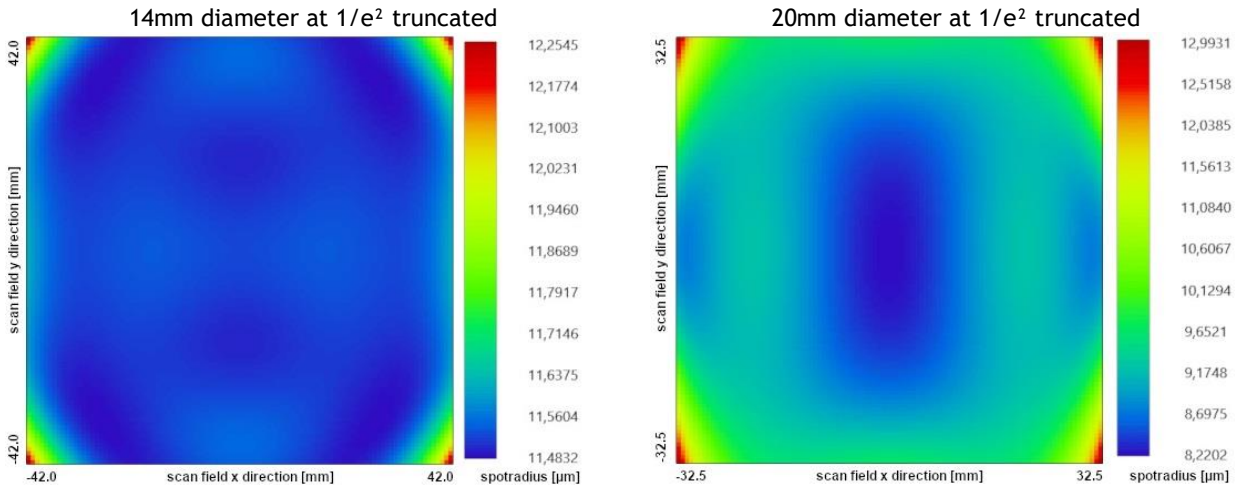

**Notes:**



For technical explanations, see our homepage.

In a 1-mirror system, the entrance pupil (EP) is the position of the scan mirror. In a 2-mirror system, it is the point where the scan mirrors should be placed around symmetrically to reach specified performance.