



 
 TOLERANCE UNLESS OTHERWISE SPECIFIED
 THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.

 .X
 ±0.25

 .XX
 ±0.13

 .XXX
 ±0.05



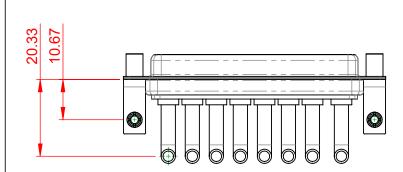

THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

COMPLIANT

N	01	ΓE	S:

MATERIAL: HOUSING: SHELL: CONTACT:

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, NICKEL PLATED COPPER ALLOY, GOLD FLASH PLATED

OPERATING TEMPERATURE:

POWER/CO-AX CONTACT RATING: 40A (CURRENT) (IF PRESENT) SIGNAL CONTACT CURRENT RATING: 5A PER CONTACT

SIGNAL CONTACT RESISTANCE:  $10m\Omega$  MAX.


INSULATOR RESISTANCE: DIELECTRIC

WITHSTANDING VOLTAGE:

5000MΩ min.

-55°C ~ 125°C

1000V AC rms



	COMBINATION D-SUB			SW REFERENCE NO.: 630 COMBO ASSEMBLY			
COMBINA				19			
			DATE:				
EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	2			
	ARIO SHALL NOT BE REPRODUCED OR COPIED OR USED AS THE BASIS FOR THE	DRAWING NUMBER: 630-8W8-250-4N5		ISSUE			
YOUR CONNECTION TO QUALITY & SERV	ICE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	PART NUMBER: 630-8W8	-250-4N5	1			

ISSUE NUMBER

(1)

ORIGINAL

